



NEW HOLLAND T3000

T3020 | T3030 | T3040



FIAT
INDUSTRIAL

STYLISH VERSATILITY TO SUIT YOUR EVERY NEED

T3000.

THE AFFORDABLE COMPACT ANSWER

Designed to meet the needs of agricultural, horticultural, groundcare and municipal user, the New Holland Series T3000 compact tractor range combines rugged build and ease of operation with modern ergonomics, advanced styling and excellent operator comfort.



A CHOICE TO SUIT EVERY BUDGET

Three T3000 models are available, the T3020, T3030 and T3040. All offer established New Holland performance features that include 4WD with an outstanding 55 degree turn angle, a two-speed 540/540 Economy PTO and a generous 1200kg rear linkage lift capacity. A 16x16 Synchro Shuttle™ transmission (with Creeper) is standard, offering operating speeds down to 250m/h.





COMFORT COMES AS STANDARD

The operator platform, or cab where specified, is mounted on tuned rubber isolation blocks to reduce heat and vibration reaching the driver. Combined with the standard high comfort seat, this feature makes T3000 tractors among the most comfortable models in their class.

All round visibility is excellent.

A forward mounted, fully folding ROPS frame is fitted to platform models, while cabbed versions benefit from wide, fully glazed doors and large windows.

ADVANCED DESIGN


The under hood muffler and air intake ensure visibility over the sloping hood is unrestricted. The ROPS frame can be completely lowered so that it does not impair forward visibility. This is not only important to customers specifying a front linkage and PTO system, but also to those working in orchards or vineyards where the smooth tractor profile reduces the chance of crop damage. Even the direction indicators fold back out of the way.



ADVANCED, AFFORDABLE AND VERSATILE

CLEAN, QUIET AND POWERFUL

The T3020 and T3030 have liquid cooled 1995 and 2189cc four-cylinder engines producing 43.5 and 47.7hp(CV) maximum and 129 and 141Nm of torque 1400 and 1200rpm respectively. The T3040 model features a 1995cc four-cylinder turbocharged 16-valve engine developing 54.4hp(CV) maximum and 159.5Nm of torque at 2000rpm.

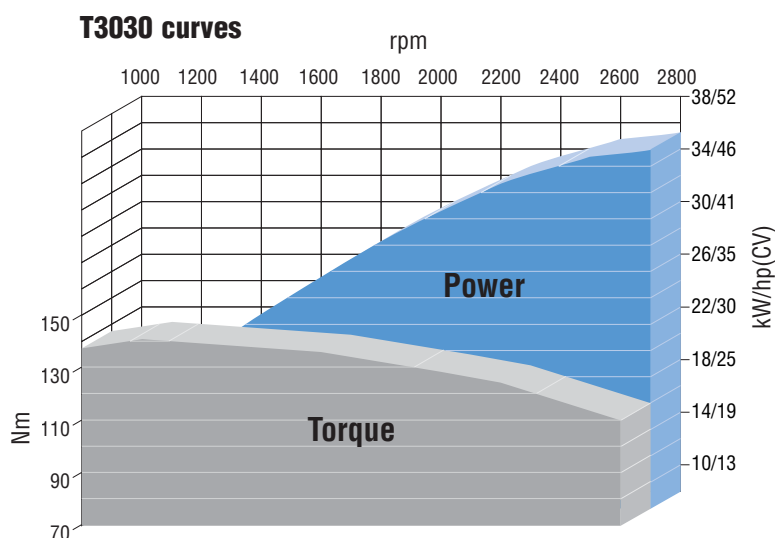

BEAUTIFULLY HARD WORKING

The smooth and stylish lines of Series T3000 tractors go beyond good looks. The rounded fenders offer the operator a clear and uninterrupted view to the rear. The sloping engine hood provides a clear view to the front and sides. Of equal importance, T3000 tractors can gently brush past high value trees and fruit crops, reducing the chance of damage.





ECONOMICAL TO RUN

Despite offering advanced features and a modern design, Series T3000 tractors are built to meet the needs of users looking for a tractor with low whole life operating costs. This is achieved by ensuring only the highest quality components are used in the production of these outstanding tractors.



EASY TO LOOK AFTER

New Holland has made Series T3000 models simple to maintain. The one-piece engine hood opens to provide full access to the engine and major service components, so all daily checks can be carried out quickly. The engines in all models have a 250 hour or 12 month service interval, with a more comprehensive service only being required every 1000 hours. All routine maintenance, such as checking and cleaning the air filter, can be carried out without tools.

COMPACT SIZE, BIG SPECIFICATION

FLEXIBLE TRANSMISSION FOR EVERY NEED

New Holland has researched customer requirements to help ensure that the 16x16 Synchro Shuttle™ transmission (with Creeper) offers a working speed to match all applications, with four ratios in each of the four working ranges. This enables operations such as specialist planting or intensive low speed cultivation, to be carried out at forward speeds as low as 250m/hr, along with less demanding direction changes thanks to the fully synchronised forward-reverse shuttle. Fully locking differentials are fitted in both axles.





VERSATILE PTO WITH ECONOMY SETTING

All models are fitted with 540, 540 economy and Groundspeed PTO as standard. A 1000rpm front PTO is also available. In low power applications, the 540 economy speed enables the operator to run the tractor at a lower engine speed to reduce fuel consumption. This means that these compact and versatile tractors can operate a wide range of equipment economically.



HIGH CAPACITY HYDRAULICS WITH POWER TO SPARE

Delivering a genuine 28 litres/min hydraulic flow rate, with a dedicated 19.7 litres/min for the power steering and ancillary circuits, Series T3000 tractors have ample capacity to handle the most power hungry attachments, including loaders and backhoes. Two remote valves are fitted as standard and a third is available. The rear Cat I three-point linkage has 1200kg lift capacity. A Cat I N front linkage, offering 400kg lift capacity, can be specified.



TURN TIGHTER FOR GREATER PRODUCTIVITY

New Holland tractors are recognised as offering class-leading manoeuvrability. Series T3000 is no exception. Fitted with high clearance portal front axles, without the restriction of a traditional CV drive coupling, the front wheels turn through a massive 55 degrees.

IT IS THE DESIGN THAT MAKES T3000 SUCH GREAT VALUE



CLASS LEADING ERGONOMICS

All Series T3000 models benefit from carefully designed controls. Both the seat and steering wheel adjust to suit the driver, helping to reduce fatigue. Where ease of operation is a priority, Series T3000 tractors are the models to choose.

PUTTING THE OPERATOR AT THE CENTRE OF OPERATIONS

Both platform and cabbed Series T3000 tractors benefit from operator focused design. The stylish bonnet slopes to provide excellent forward visibility. Where fitted, the ROPS frame is positioned ahead of the driver to optimise the view to the sides.





STYLE AND COMFORT IN ANY CLIMATE

In conditions where the year round comfort of a cab is required, Series T3000 offers wide, fully-glazed doors combined with the low platform to provide easy access. The cab is mounted on tuned rubber isolation blocks to optimise operator comfort.

BIG TRACTOR FEATURES AND COMFORT

The spacious cab is fully glazed to offer 360° visibility. Finished in high quality materials, the cab is radio ready, has front and rear wipers with integral screen wash and four additional work lights.

A CAB FOR ALL SEASONS

Warmth in winter is assured by the high output heating system, whilst in summer the cab can be cooled by the three-speed blower. Full cab ventilation can be achieved by opening the front and rear windows. Air conditioning is available as an option on all models.



BEYOND THE PRODUCT



QUALIFIED DEALER TECHNICIANS GIVE YOU THE MOST PROFESSIONAL TECHNICAL SUPPORT

A dealer technician certification programme helps ensure customers get the professional technical support they expect every time. To support this programme New Holland has created an online tool to train and develop the knowledge and skills of all technicians at New Holland dealerships. This online tool enables the technicians to build on the training received during workshops at New Holland's Training Centres and constantly update and develop their knowledge.



WE UNDERSTAND YOUR BUSINESS, WE TAILOR YOUR FINANCE TO YOUR NEEDS

CNH Capital, the financial services company of New Holland, has thorough knowledge of the agricultural industry. Every customer is unique, with specific equipment and financial needs. That's why we extend customer service to include tailor-made financial packages. New Holland Dealers and CNH Capital specialists work together to offer you the most advanced agricultural equipment coupled with a flexible and innovative financing solution. With CNH Capital, you have the peace of mind that comes from dealing with a financing company that specialises in agriculture.



SERVICE PLUS LONG LASTING CONFIDENCE

Service Plus coverage from Covéa Fleet provides owners of New Holland agricultural machinery with additional cover on the expiry of the manufacturer's contractual warranty. Please ask your dealer for more details. Subject to status and availability. Terms and conditions apply.

II SPECIFICATIONS

MODELS		T3020	T3030	T3040
Engine		Yanmar	Yanmar	Yanmar
No. of cylinders / Capacity / Valves / Emissions level	(cm ³)	4 / 1995 / 2 / Tier 3	4 / 2189 / 2 / Tier 3	4 / 1995 / 4 / Tier 3
Aspiration		Natural	Natural	Turbocharged
Max power ISO TR14396 - 2000/25/EC	[kW/hp(CV)]	31.9/43.5	35/47.7	39.9/54.3
Rated engine speed	(rpm)	2800	2800	2800
Maximum torque ECE R24	(Nm@rpm)	129@1400	141@1200	159.5@2000
Cooling method		Liquid	Liquid	Liquid
Fuel tank capacity	(l)	40	40	40
Engine service intervals	(hrs)	250	250	250
Transmission				
16x16 Synchro Shuttle™ transmission (with Creeper)		●	●	●
Minimum speed	(m/h)	250	250	250
Maximum speed	(km/h)	30	30	30
Front axle				
Four wheel drive (4WD)		●	●	●
Wheel turn angle	(°)	55	55	55
Independent steering pump (19.7lpm)		●	●	●
Turn radius 4WD	(mm)	3500	3500	3500
Mechanical 4WD engagement		●	●	●
Electro-hydraulic differential lock	(front / rear)	●	●	●
Rear hydraulic lift & PTO system				
Standard pump flow	(lpm)	28	28	28
Mechanical draft control		●	●	●
Rear lift capacity at ball ends	(kg)	1200	1200	1200
Category 1 linkage		●	●	●
Max rear remotes		3	3	3
Rear PTO 540 / 540E / Groundspeed		●	●	●
Front hydraulic lift & PTO system				
Front lift capacity at hook ends	(kg)	400	400	400
Front hydraulic lift (Category 1)		○	○	○
Fixed type link ends		●	●	●
Front PTO 1000rpm		○	○	○
Operator's environment				
Rubber "silent blocks"		●	●	●
Deluxe seat (ONLY cab version)		●	●	●
Suspended platform (with ROPS)		●	●	●
Cab		○	○	○
Heating and ventilation system (Cab version)		●	●	●
Air conditioning		○	○	○
Opening front and rear screens		●	●	●
Dimensions and weights				
A - Wheelbase	(mm)	1700	1700	1760
B - Front wheel track settings	(mm)	1107 / 1357	1107 / 1357	1107 / 1357
C - Rear wheel track settings	(mm)	1032 / 1262	1032 / 1262	1032 / 1262
D - Minimum overall width	(mm)	1380	1380	1380
E - Minimum overall height - ROPS	(mm)	1930	1930	1930
E - Minimum overall height - Cab	(mm)	2140	2140	2140
F - Length with ballast	(mm)	3300	3300	3360
Weight - ROPS	(kg)	1460	1460	1480
Weight - Cab	(kg)	1610	1610	1630

*Conditions Apply ● Standard ○ Optional – Not Available



NEW HOLLAND TOP SERVICE: CUSTOMER SUPPORT AND CUSTOMER INFORMATION



TOP AVAILABILITY.
If you need information, or have an out of hours question, ring our toll-free number*. All day, every day, we are just a call away.



TOP SPEED.
Express parts delivery: when you need it, where you need it!



TOP PRIORITY.
Fast-track solution during the season: because your harvest can't wait!



TOP SATISFACTION.
We drive and track the solution you need, keeping you informed: until you are 100% satisfied!



* Calls to the Top Service team are free from landlines in the United Kingdom and Republic of Ireland. UK-based mobile calls are also free, but Republic of Ireland mobile users should call **01 2421881** and this will be charged at your standard network rate.

For more details, ask your New Holland dealer!

AT YOUR OWN DEALER



YOUR SUCCESS - OUR SPECIALTY

Visit our web site for UK: www.newholland.com/uk - for ROI: www.newholland.com/ie

The data indicated in this folder are approximate. The models described here can be subjected to modifications without any notice by the manufacturer. The drawings and photos may refer to equipment that is either optional or intended for other countries. Please apply to our Sales Network for any further information. Published by New Holland Brand Communications. Bts Adv. - Printed in Italy - 07/12 - TP01 - (Turin) - **120010/INB**