

# NEW FLEXING CUTTERBAR DRAPER HEAD

880CF



The new 880CF flexing cutterbar draper head provides closer cutting and better flotation so you can harvest every bit of your valuable crop. These rugged combine headers are available in cutting widths of 25, 30, 35, 40, 45 feet.

## IMPROVED FLOTATION

A patented, rubber spring flotation system allows the 880CF head to follow ground contours more closely. You can adjust the rubber torsion springs on each floor support manually to tailor flotation to conditions or to compensate for any cutterbar unevenness. Or, ask your New Holland dealer to install optional hydraulic cutterbar flotation so you can make adjustments right from the combine cab.

## CLOSE CUTTING

The six-bat reel smoothly feeds crop to the cutterbar, which cuts cleanly using three-inch guards and overserrated knife sections with 10 teeth per inch. A shorter skid shoe design reduces weight and allows the cutterbar to cut closer to the ground for better cutterbar flexing. The header height control system makes use of either four-sensor or two-sensor combine systems. The hydraulic center knife drive system uses a patented single gearbox mounted under the center draper to drive both knife assemblies.

This design distributes weight evenly, neutralizes header vibration and leads to exceptionally smooth cutting action.

## SMOOTH DRAPER FEEDING

Variable-speed outer draper belts and fixed-speed twin 41.6-inch center draper belts deliver the crop smoothly to the floating 26-inch-diameter auger. The auger features five-inch flighting and handles heavy crop and feeds it smoothly into the combine. A flatter auger floor angle aids crop flow. You can also adjust the auger up, down, fore and aft to match conditions.

## ADDITIONAL FEATURES:

- A new, patented rubber retention system prevents broken auger fingers from entering the combine.
- Reel Sensors provide for easy return-to-cut after each pass
- 25-, 30-, and 35-foot heads feature a single-span, plastic-tine pickup reel
- 40- and 45-foot models use a dual-span reel with plastic tines
- Ull reel and cam reel are optional

## NEW HOLLAND FLEXING CUTTERBAR DRAPER HEAD

### CX8000 Combine Compatibility


Model	CX8070	CX8080	CX8090
880CF	30', 35'	30', 35', 40'	30', 35', 40', 45'

### CR9000 Combine Compatibility

Model	CR6090	CR7090	CR8080	CR8090	CR9090
880CF	30', 35'	30', 35', 40'	30', 35', 40', 45'	30', 35', 40', 45'	30', 35', 40', 45'

## NEW HOLLAND TOP SERVICE<sup>SM</sup>

TOTAL SUPPORT, TIMELY INFORMATION FOR NEW HOLLAND CUSTOMERS.

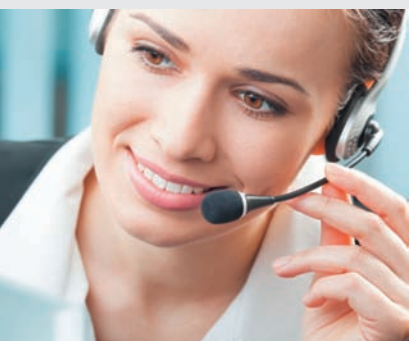

### TOP AVAILABILITY

Year-round support and information — just by calling one toll-free number.



### TOP SPEED

Express parts delivery when and where you need it.



### TOP PRIORITY

Fast-track solutions maximize your productivity — because your harvest can't wait.



### TOP SATISFACTION

We drive and track the solution you need, keeping you informed — until you are back to work.

TOP SERVICE IS MANAGED IN CLOSE PARTNERSHIP WITH NEW HOLLAND DEALERS AND SERVICE TEAMS.

## YOUR NEW HOLLAND DEALER



Learn more at [www.newholland.com/na](http://www.newholland.com/na)

Design, materials and/or specifications are subject to change without notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.

© 2011 CNH America LLC. All rights reserved. New Holland and CNH Capital are registered trademarks of CNH America LLC. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH America LLC, are the property of those respective companies.



Safety begins with a thorough understanding of the equipment. Always make sure you and your operators read the Operator's Manual before using the equipment. Pay close attention to all safety and operating decals and never operate machinery without all shields, protective devices and structures in place.

NH31088010 • 061105 • SP • PRINTED IN U.S.A.