



ENGINE

Model	FPT F5C F5HFL463D*G003
Emissions Certification	Tier 4 Final Certified
Cylinders	4
Displacement	207.5 in3 (3.4 L)
Fuel injection	Common rail
Fuel	DieselFuel
Fuel filter	Spin-on w/ in-line strainer
Air intake	Cross-flow
Cooling	Liquid
Engine speeds	RPM
High idle - no load	2340 +/- 50
Rated - full load	2200
Low idle	1100 +/- 25
Horsepower @ 2200 RPM – SAE J1349:	
Net	68 hp (50.6 kW)
Gross	73.8 hp (55 kW)
Engine lubrication:	
Pump	Deep sump plate cooler w/ pressurized under-piston nozzles
Pump operating angle ratings:	
Side-to-side	35°
Fore and aft	45°
Oil filtration	Replaceable, spin-on full-flow cartridge
Radiator:	
Core size area	367.5 in2 (2 370.8 cm2)
Rows of tubes	24
Fan:	
Diameter	20 in (500 mm)
Ratio	1.1:1

DRIVETRAIN

Dual path hydrostatic:	
Pump	Variable axial piston
Motor	Variable bent axis piston
Max. drawbar pull*	39,086 lb (173.9 kN)
Transmission	Single lever control – electronic straight tracking
Transmission oil filter	4 micron, spin-on replaceable
Travel speeds*:	
Forward	5.0 mph (8 kph)
Reverse	25.0 mph (8 kph)
Parking brakes	Heavy-duty, spring-applied, hydraulic pressure release
Steering brakes	Hydrostatic
Final drive	2 helical gear reduction to planetary output
Ratio	62.4:1
Transmission cooling:	
Type	Oil to air
Core size	216.9 in2 (1 399.3 cm2)

NOTE: *Measured using standard track chain. Increase travel speeds by 4% and reduce drawbar pull by 4% with the optional Max-Life track chain.

ELECTRICAL

Alternator	120 amp
Battery	12-volt low-maintenance 925 cold-cranking amps @ 0° F (-18 C)
Electrical system	12 Volts

OPERATOR ENVIRONMENT

ROPS cab; Single lever control for speed, steering and direction; Forward/reverse speed ratio selector; Adjustable armrests; Foot rests; Retractable seat belt, 2 in (51 mm); Rear view mirror; Seat tilts for access.

Warning lights:

Air filter; Alternator; Engine oil pressure; Diagnostic fault indicator; Engine coolant; temperature; Engine oil pressure; Low fuel level; Park brake engaged; Service soon indicator; Transmission temperature; Hi range; Hydraulic filter; Transmission filter; Transmission pressure.

Gauges:

Battery voltage; Fuel level; Digital hourmeter/tachometer/ diagnostics/service reminder; Transmission oil temperature; Water temperature.

Audible warnings:

Engine oil pressure; Transmission pressure; Engine coolant temperature; Low fuel level; Transmission charge pressure; Transmission/hydraulic temperature.

OPERATING WEIGHT

Unit equipped w/ ROPS, full fuel tank, 170 lb (77 kg) operator, track guides, backup alarm, horn and lights.

Long track	15,803 lb (7 168 kg)
Add-on weights:	RPM
Drawbar	128 lb (58 kg)
Ripper – 3 shank	1,400 lb (635 kg)
Winch	1,861 lb (844 kg)
Front counterweight	838 lb (380 kg)
Cab	1,874 lb (850 kg)
Max-Life chain	115 lb (52 kg)
Center rockguard	157 lb (71 kg)
Sweeps	110 lb (50 kg)
Dual batteries	60 lb (27 kg)
90 in blade	925 lb (420 kg)
96 in blade	1,001 lb (454 kg)
109 in blade	1,121 lb (508 kg)
120 in blade	1,235 lb (560 kg)
SALT w/ 15.6 in closed shoe	2,533 lb (1 149 kg)
Max-Life w/ 15.6 in open shoe	2,595 lb (1 177 kg)
SALT w/ 20 in closed shoe	2,889 lb (1 310 kg)
Max-Life w/ 20 in open shoe	2,951 lb (1 338 kg)
SALT w/ 24 in closed shoe	3,210 lb (1 456 kg)
Max-Life w/ 24 in open shoe	3,272 lb (1 484 kg)

HYDRAULICS


Pump flow @ 2000 RPM @ 3,000 psi (20 880 kPa)	20.3 gpm (78.8 L/min)
Lift cylinder	Two (2)
Bore diameter	3.50 in (88.9 mm)
Rod diameter	1.75 in (44.4 mm)
Stroke	15.53 in (394.5 mm)
Angle cylinder	Two (2)
Bore diameter	3.50 in (88.9 mm)
Rod diameter	1.75 in (44.5 mm)
Stroke	13.46 in (342.0 mm)
Tilt cylinder	One (1)
Bore diameter	3.50 in (88.9 mm)
Rod diameter	1.75 in (44.4 mm)
Stroke	5.39 in (137 mm)

SERVICE CAPACITIES

Fuel Tank	40.8 gal (154.4 L)
Engine oil w/ filter	13 qt (12.3 L)
Engine oil w/o filter	12.2 qt (11.5 L)
Engine cooling system	23.9 qt (22.6 L)
Hydraulic reservoir	16.5 gal (72.7 L)
Final drive – per side	16 qt (15.1 L)
Track rollers – each	0.16 qt (0.15 L)
Front idlers – each	0.34 qt (0.326 L)
Carrier rollers – each	0.13 qt (0.136 L)

OTHER SPECIFICATIONS

Undercarriage:		Carrier rollers per side	1	Ripper:	
Track adjustment	Hydraulic	Track roller rail diameter	5.98 in (152 mm)	Max. penetration:	15.3 in (389 mm) w/ grousers penetrated – see below
Frame	Rigid suspension	Track on ground:		Width	73.1 in (1 856 mm)
Length of track on ground:		Shoe area:		Cut width	70.1 in (1 781 mm)
	85 in (2 159 mm)	15.6 in (395 mm)	2,644 in ² (17 056 cm ²)	Max. ground clearance	15.5 in (393 mm)
Track link pitch	6.125 in (155.575 mm)	20 in (508 mm)	3,372 in ² (21 755 cm ²)	Points	Replaceable
Track shoe height	2.06 in (52 mm)	24 in (610 mm)	4,083 in ² (26 340 cm ²)	Max. number of shanks	3
Pin diameter	1.125 in (28.575 mm)	Track:		Tooth spacing:	
Bushing diameter:		Long Track:	15.6 in (395 mm) open grousers and Max-Life	w/ 3 teeth	31 in (785 mm)
SALT track	2.13 in (54 mm)	Blade:		Hydraulic cylinder	Double-acting
Max-Life track	2.68 in (68 mm)	Variable blade pitch	52° – 60°	Diameter	3.9 in (99.02 mm)
Bolt diameter	0.625 in (16 mm)	Lift speed – per second	19.7 in (500 mm)	Stroke	8.4 in (213 mm)
Track shoes per side	40	Cutting edge	Reversible, replaceable	Rod	1.75 in (44.5 mm)
Track rollers per side	6	Width	8.0 in (203 mm)		
		Thickness	0.625 in (16 mm)		

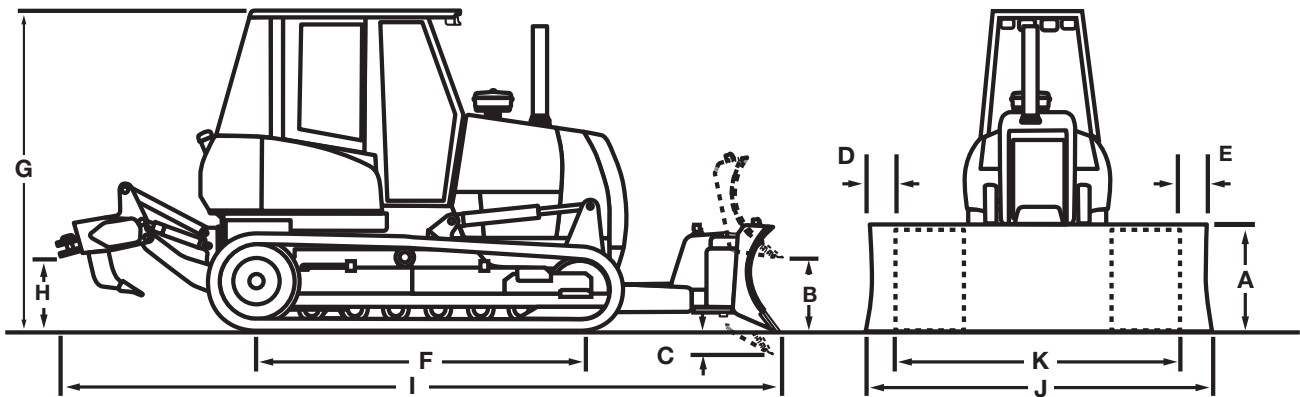

Line drawings are for illustrative purpose only and may not be exact representation of unit.

DIMENSIONS

	Long Track (LT)
Blade width	90 in (2 286 mm)
SAE blade capacity	1.58 yd ³ (1.21 m ³)
A. Blade height	33.1 in (841 mm)
B. Blade lift above ground	35.1 in (892 mm)
C. Blade depth below ground	21.0 in (533 mm)
Blade angle both directions	22.7°
D. Cast reach	11.4 in (288.4 mm)
E. Cut reach	-0.37 in (-9.5 mm)
Blade tilt, each end – up to 9.7°	7.72 in (196 mm)
Track gauge	56.47 in (1.43 m)
Maximum shoe width	15.6 in (395 mm)
F. Length of track on ground: Max-Life	85 in (2.16 m)
Area of track on ground	2,644 in ² (1.71 m ²)
Ground pressure	5.98 psi (41.2 kPa)
G. Height to top of ROPS	8 ft 8 in (2 648 mm)
Height to top of cab with air conditioning	8 ft 9 in (2 653 mm)
H. Ground clearance	13.07 in (332 mm)
Length:	
Blade straight with drawbar	13 ft 8 in (4 180 mm)
I. Blade straight with ripper	16 ft 3 in (4 951 mm)
Width:	
J. Blade straight	7 ft 6 in (2 286 mm)
Blade angled	7 ft 1 in (2 159 mm)
K. Over track	6 ft 0 in (1 829 mm)

STANDARD EQUIPMENT

OPERATOR ENVIRONMENT

See page 1

ENGINE

FPT F5C F5HFL463D*G003
Tier 4 Final Certified
Automatic fan belt tensioner
Integral engine oil cooling
Fuel filter
Dual element radial seal air cleaner
120 amp alternator
925 CCA 12-volt battery
Engine side panel
Anti-freeze to -34°F
Pusher fan
Radiator – Anti-sandblast

DRIVETRAIN

Dual path infinitely variable, single-lever controlled hydrostatic drive with electronic straight tracking & counter-rotation
Final drive:
Triple reduction; helical gear/planetary decelerator with hydrostatic drive retardation
Decelerator with hydrostatic drive retardation
Automatic spring-applied parking brake
10 incremental speed settings - Operator preference settings for max speed, shuttle sensitivity and steering sensitivity

BLADE

52° – 60° variable pitch
Single lever control for blade lift, angle and tilt
90 in (2.29 m) blade 650M LT

UNDERCARRIAGE

Hydraulic track adjusters
Easy clean track covers
Case sealed and lubricated track chain
Permanently lubricated track and carrier rollers
H.D. track covers
Track adjuster guard
Track gauge – 56 in or 68 in
Track guides – front and rear
Length of track on ground – 85 in
High visibility track idler
Heavy duty track frame, sprocket and mounting pads

OTHER

Anti-vandalism package
Backup alarm
Hinged grill
Decelerator
Final drive seal guard
Hand throttle
Horn

Work lights:

2 front
1 rear
Master disconnect switch
Mirror
Operator's manual enclosure
O-ring face seal hydraulic fittings
Pre-cleaner
Vertical spin-on hydraulic/filters
Hydraulics – 3 spool valve
Fuse circuit protection
Single key start switch
Pre-wired for work lights
Two additional power sources available for heater, air seat or auxiliary 12 volt power port
Crankcase
Transmission bottom

TELEMATICS

CASE SiteWatch™ Telematics – includes hardware and a 3-yr Advanced data subscription

STANDARD EQUIPMENT

OPERATOR ENVIRONMENT

Cab with heater, 22,700 BTU (6.65 kW)/hr air conditioner, defroster, front windshield washer and 2F-1R lights
3 in (76 mm) seat belt
Deluxe air suspension seat

HYDRAULICS

4 spool hydraulic valve for field-installed ripper

REAR MOUNTED EQUIPMENT

Ripper, parallelogram 5 slots with 3 shanks

BLADES

90 in (2.29 m) Long track

GUARDS

Brush guards (Sweeps)
Center rockguard

SCREENS

Rear ROPS and cab
Side ROPS
Radiator brush screen

OTHER

Case Max-Life track
Cold start aid (Grid Heater)
Counterweight, front
Drawbar
Front pull hook
Lights – halogen, 2 front, 1 rear for cab or ROPS
Retrieval hitch
Special paint
Turbo precleaner
Winch drive PTO
Rear Wiper for cab
Lights without brush guard
Lights with brush guard
Diagnostics check fittings
Environmental drains
Lift/Tow decals (Export)