

SINGLE DRUM COMPACTOR

CASE

CONSTRUCTION

SINCE 1842.

SV216

ENGINE

Manufacturer	Cummins with Tier III certification
Type	QSB 4.5
Gross horsepower	148 hp (110 kW)

ELECTRICAL SYSTEM

Voltage	24 V
Batteries	2 - 100 A
Alternator	45 A

STEERING

Gear pump	1
Cylinders	2
Angle (left/right)	36°
Oscillation angle	10°
Inside turning radius	3.05 m (10.0 ft)
Outside turning radius	5.37 m (17.6 ft)

WEIGHT

WEIGHT - Smooth drum	
Operating weight	15,300 kg (33,730 lbs)
Max. weight	15,380 kg (33,910 lbs)
Drum weight	10,916 kg (24,066 lbs)
Static linear load	51.2 kg/cm (287 lb/in)
Tire ballast	1200 kg (2,646 lbs)

WEIGHT - Padfoot drum	
Operating weight	15 209 kg (33,530 lbs)
Max weight	15 290 kg (33,710 lbs)
Tire ballast	1200 kg (2,646 lbs)

TRAVEL

Hydraulic circuit type	Closed
Variable displacement axial piston type wheel drive pump	1
Hydraulic fixed displacement wheel drive motors	2
Drive motor interlock	Yes
Hydraulic variable displacement drum drive motor	1
F/R travel speed range	4
Working speeds mph (km/h)	
1st (max)	1.6 (2.5)
2nd (max)	2.17 (3.5)
3rd (max)	2.8 (4.5)
Max travel speed	6.2 (10.0)
Gradeability	45%

Transversal stability (machine in straight line)
36° slope

VIBRATION

Hydraulic circuit type	Closed
Variable displacement axial piston type pump	1
Fixed displacement hydraulic motor	1
Vibration	2 eccentric weights circular pattern / continuously adjustable
Vibration modes	2
Frequency	
Low	1740 VPM (29 Hz)
High	2100 VPM (35 Hz)
Amplitude	
Low	1.00 mm (.039 in)
High	2.00 mm (.079 in)
Centrifugal force	
Low	237 kN (53,261 lbs)
High	325 kN (73,037 lbs)

TIRES

Size	23.1 x 26 10PR
Smooth drum	Diamond or traction tread
Padfoot drum	Traction tread
Tire ballast	Traction tread only

CAPACITIES

Fuel tank	410 l (108 gal)
Engine oil	16.3 l (17.2 qt)
Engine coolant	25 l (26.4 qt)
Hydraulic reservoir	90 l (95 qt)
Transmission	4.2 l (4.4 qt)
Transmission axle	2.8 l (2.9 qt)
Vibration system	8 l (8.4 qt)

OPERATOR STATION

Isolated from chassis by flexible shock absorbers, handrail, dual rearview mirrors, front lighting, instrument panel anti-vandal guard. Vinyl suspension seat with armrests and 2 inch (51 mm) retractable seat belt. Exceptional front/rear visibility.


STANDARD EQUIPMENT

ROPS & FOPS protection
Hydrostatic drive for both drum and wheels
Dual amplitude vibration
Interwheel differential lock
Articulated chassis
Front and rear pull points
4 point lift and tie down provision
Fan guard
Backup alarm
Halogen work lights, 2F/2R
Auto-vibration control
Master disconnect switch
Spring applied, hydraulic release parking brake
3 working speeds / 1 transport speed
Single lever speed / direction control
Steering wheel spinner knob
Lockable tool box
Cup holder
Horn
Emergency stop button
Spin-on fuel, engine oil and hydraulic filters
LCD Monitor

OPTIONAL EQUIPMENT

Traction Assist Systems
ASC-anti-slip control (smooth drum option only)
HD-heavy duty (includes ASC; smooth drum or padfoot drum)
HT-high traction (includes ASC; padfoot drum with leveling blade only)
Padfoot shell kit with scrapers
Pressurized cab with heat and ventilation
Air conditioning
Radio ready
Engine filter pre-cleaner
Electric engine hood tilt
3 in (76.2 mm) retractable seat belt
Compaction meter system (Voelkel)
Compaction meter printer
Side slope rollover warning system
Rotating beacon

DIMENSIONS

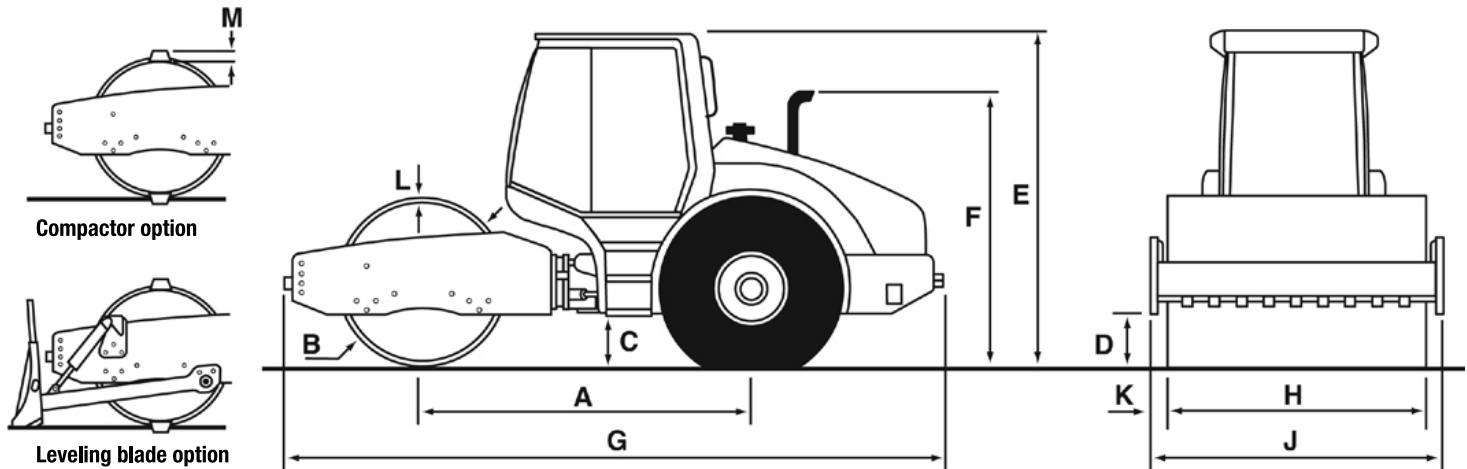

A. Wheelbase	2.9 m (115.4 in)
B. Drum diameter	
Smooth drum	1.5 m (59 in)
Padfoot drum	1.64 m (64.6 in)
C. Ground clearance	0.44 m (17.3 in)
D. Distance to the curb	0.43 m (17 in)
E. Overall height	3.1 m (121 in)
F. Muffler height	2.5 m (98 in)
G. Overall length	5.9 m (232.3 in)
H. Drum width	2.13 m (84 in)
J. Overall width	2.25 m (88.9 in)
K. Frame extensions	0.11 m (4 in)
L. Drum thickness	0.04 m (1.57 in)
M. Padfoot height	100 mm (3.9 in)



SiteWatch™

Fleet management and monitoring system by satellite or cell phone tracking.

CASE Corporation reserves the right to make design improvements or feature changes at any time without obligation to install them on previously sold units. Features, descriptions, and illustrative materials included in this document, accurately reflect known data until the date of publication, although they are subject to changes without notice. Illustrations may include optional equipment and accessories and may not include all standard equipment.

CCEIO074 – 07/2021 – Impreso en Brasil

CaseCE.com

CNI | CAPITAL
INDUSTRIAL

Garín Trade Office

ARGENTINA
Ávalos 2829 Edif. 1 Piso 4°,
Complejo Urbana
Vicente López (1605) Bs. As.,
Argentina. Phone +54 (11) 2034 1400

Manufacturing plants

BRAZIL
Contagem – Minas Gerais – Brazil
Av. General David Sarnoff, 2237
Inconfidentes – C. P. 32210-900
Phone +55 31 2104-3392

Sorocaba – São Paulo – Brazil
Av. Jerome Case, 1.801
Éden – CEP 18087-220
Phone +55 15 3334-1700