

## **Crawler Dozers**

M SERIES







750M



850M



1150M



1650M



2050M

## PUT MORE POWER TO THE GROUND

CASE M Series – the industry's first line of dozers with powerfully efficient SCR (Selective Catalytic Reduction) technology built in. Best-in-class drawbar pull and class-leading horsepower provide unbeatable pushing power, while enhanced controls with adjustable settings make it easy to match machine performance to ground conditions or operator preference. Even the cab has been redesigned to be quieter and more comfortable than ever before. More strength. More command. More done. Meet the M Series.

- + Best-in-Class Drawbar Pull\*
  + Exclusive SCR Tier 4 Engine\*\*
  + Industry-Leading Visibility
- + Positive-Pressure Cab
- + Shuttle, Steering & Blade Sensitivity Settings\*\*\*
- + Protected by ProCare

- \*Excludes 1650M and 2050M
- \*Blade sensitivity not available on 750M or 850M

## PRECISE CONTROLS, PRODUCTIVE COMFORT









#### **ADJUSTABLE SHUTTLE & STEERING SETTINGS**

Whether fine-grading or operating at full speed, comfortable control is crucial to getting the job done right. The M Series lets operators match their preference – or experience level – to the task at hand by adjusting between three shuttle (forward-to-reverse) and steering sensitivity settings: Smooth for subtle adjustments, Moderate for normal operation or Aggressive for quick response.

#### **ENHANCED FINGERTIP BLADE CONTROLS**

CASE dozers put convenient blade controls right at your fingertips. Operators can adjust sensitivity of the blade movement to match operator preference and job site requirements on the 1650M and 2050M. Adjustments to blade sensitivity are made through the Advanced Instrument Cluster (AIC). There are also dedicated buttons for automatic Blade Shake to help with shedding material off the blade, and a Fine Grading command, which instantly cuts blade speed by 40% for increased accuracy.


#### A CLEANER, QUIETER CAB

M Series dozers offer an all-new cab. True positive pressure with advanced sealing helps keep out dirt, dust and noise, and creates a working environment with one of the industry's lowest sound ratings. The improved cab also offers an isolated design to reduce cab vibration for a smoother, more comfortable ride.

#### **UNMATCHED VISIBILITY**

See objects and obstacles sooner. With an optimized cab-forward design, a sloped hood and relocated door handles, M Series dozers offer excellent vision of the blade edge and a cab-to-ground line-of-sight distance as short as 15 feet 6 inches\* – twice as close as competitive models.

\*15-foot-6-inch cab-to-ground range on the 2050M with PAT blade

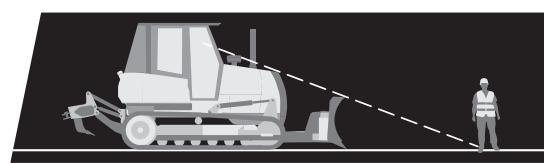



## **ALL-POWERFUL**





#### **AN EXCLUSIVE TIER 4 SOLUTION**

CASE M Series are the only dozers powered exclusively by fuel-efficient SCR technology\*. Rather than compromise power, this after-treatment system lets the engine do what it does best – run at peak performance. The hydrostatic transmission is able to deliver the force and drawbar pull required to move more material while achieving up to 10% fuel savings over the L Series. Plus, SCR is simple. No regeneration. No downtime. Just pour and go.
\*Excludes 750M

## THE BEST DRAWBAR PULL AND MASSIVE TORQUE

Thanks to a highly efficient hydrostatic transmission, M Series dozers offer massive amounts of torque andhorsepower to provide unbeatable pushing power under extreme loads.

## PATENTED EQUISTATIC DEVICE BALANCES BLADE STRESS

OnceThe intelligent design of our exclusive equistatic device distributes force evenly to both pushing beams regardless of blade tilt or load position. The result? Longer chassis life, reduced wear to arm components and a balanced load that maximizes power. Available on the Semi-U and straight blades for the 1650M and 2050M.

#### **ROBUST C-FRAME\***

With dozers so strong, CASE needed to design a new C-frame to support the blade forces. This heavy-duty, one-piece frame is box style instead of slab cut to provide greater durability, especially when working with an angled blade.

\*On machines with PAT blades; excludes 750M

#### **IMPROVED COOLING PACKAGE\***

A V-shaped cooling package enables M Series dozers to maintain optimal performance in ambient temperatures up to 122° F (50° C). Its efficient setup, together with a hydraulic reversible fan with programmable intervals, saves time and money by reducing radiator cleaning intervals and even helping to cut fuel consumption.

\*Available on 1650M and 2050M



### ATTACHED TO STRENGTH

#### **COMPATIBLE WITH TOP BLADE GUIDANCE SYSTEMS**

For enhanced leveling performance, M Series dozers are compatible with the most popular GPS and laser guidance systems. Factory-installed base kits are available for Leica, Topcon and Trimble® electronic blade controls.









#### SPECIALIZED KITS AVAILABLE

Several heavy-duty attachments and DIA kits are available to optimize M Series dozers for specialized applications. See your CASE dealer for a complete list of options.

- + Forestry Package
- + Landfill Package (1650M and 2050M)
- + Factory-Installed Base Kit
- + Winch



#### CASE EXTENDED LIFE TRACKS (CELT)

M Series can be fitted with our heavy-duty CELT undercarriage system, which is ideal for sand and highly abrasive conditions. With hardened rotating bushings that spin freely around the pin to spread load, the CELT design can result in twice the wear life of standard tracks.



## **MAINTENANCE MADE EASY**

#### SERVICEABILITY IS IN OUR DNA

When you invest in CASE equipment, you need it to last. We make it simple. CASE M Series dozers are no exception. From heavy-duty panels with pressure-closing latches to grouped greasing points, you can do daily maintenance in a matter of minutes. It's the easiest way to help you get the most performance and languest life out of your machine.



#### Easy access to everything

- 1 Hydraulic test ports
- 2 Fan belts
- 3 Oil fill

- 4 Oil filter
- 5 Flip-out doors
- 6 Electric fuses

- 7 Multi-functional control valve and hydraulic component access
- 8 Fuel and DEF fill

#### **NO TOOLS NECESSARY**

The M Series dozers continue the CASE hallmark of simple serviceability with features like tool-free access to routine maintenance points.



- 9 3 belly pans
- 10 Valves
- (11) Centralized grease points
- (12) Air filter
- 13 Engine oil dipstick

## SUPPORT COMES STANDARD

#### BASE & EXTENDED WARRANTY COVERAGE:

#### 1-YEAR/UNLIMITED-HOUR FULL-COVERAGE BASE LIMITED WARRANTY

#### 2-YEAR/2,000-HOUR EXTENDED ENGINE WARRANTY

Discuss the extended engine warranty coverage details with your dealer.

#### **UPTIME SOLUTIONS**

Your CASE dealer can provide solutions to meet all your needs and keep you productive.



#### STRONGER PRODUCT SUPPORT SOLUTIONS

Your CASE dealer knows best how you can maximize your equipment investment and uptime—with genuine CASE parts, expert service and a complete range of product support solutions including CASE remanufactured and all-makes parts. CASE supports better parts availability and faster deliveries through nine parts distribution centers in North America and a forecasting system to ensure that the right parts will be there when you need them. And only CASE dealers have exclusive access to the Electronic Service Tool (EST) that quickly pinpoints machine issues. Just ask your dealer for details.



#### **FLEXIBLE FINANCIAL OPTIONS**

Specialized finance programs and flexible leasing packages put you in the driver's seat of industry-leading CASE equipment while nononsense warranties and comprehensive protection plans ensure that your equipment is protected. As the only finance company dedicated to CASE, we offer strong products and services designed around your unique needs and are the only ones supported by the helpful service professionals at your CASE dealer.



<sup>\*</sup>Please see your CASE dealer for limitations, exclusions and confirmation of policies in effect.



# **ProCare**

#### GO BIG, WE'VE GOT YOU COVERED

CASE ProCare is the first all-in-one heavy machine support program that's as powerful as the equipment it protects. Best of all, ProCare comes standard on M Series crawler dozers and keeps you covered for up to three full years. It's the assurance growing businesses need to stay competitive, productive and profitable.

#### **Breakdown Assistance**

Standard on all CASE equipment.











3-year/3000-hr. Full-Machine Factory Limited Warranty\*

We've got your back — for up to three full years!

3-year/3000-hr.
Planned
Maintenance

Don't spend a dime for CASE-certified scheduled care – fluids, filters and labor included. 3-year Advanced SiteWatch™ Subscription

Telematics isn't a luxury; it's a necessity — and we've made it accessible to all.



#### STRONGER PRODUCT SUPPORT SOLUTIONS

Your CASE dealer knows best how you can maximize your equipment investment and uptime, with genuine CASE parts, expert service and a complete range of product support solutions – including CASE remanufactured and all-makes parts. CASE supports better parts availability and faster deliveries, through nine parts distribution centers will be there when you need them. And only CASE dealers have exclusive

\*See CNH Warranty and Limitation of Liability for complete terms and limits of warranty. ProCare is a factory-fit program available on select 2013 and later machines.

## **SPECIFICATIONS AND DIMENSIONS**

SPECIFICATIONS	750M WT PAT Blade	850M LGP PAT Blade	1150M LGP PAT Blade	1650M LGP PAT Blade	2050M XLT Semi-U Blade
Engine	FPT F5HFL413J	FPT F4HFE413P	FPT F4HFE613F	FPT F4HFE6132	FPT F4HFE613J
Displacement/Cylinders – in³ (L)	208 (3.4)/4	275 (4.5)/4	409 (6.7)/6	409 (6.7)/6	409 (6.7)/6
Net Horsepower @ 2000 RPM – hp (kW)	92 (69)	112 (84)	127 (95)	150 (112)	214 (160)
Emissions Certification* Solutions	Tier 4 Interim (DPF)	Tier 4 Interim (SCR)	Tier 4 Interim (SCR)	Tier 4 Interim (SCR)	Tier 4 Interim (SCR)
Operating Weight – lb (kg)	20,140 (9 090)	21,560 (9 779)	31,134 (14 122)	37,750 (17 123)	45,398 (20 592)
Blade Width – in. (mm)**	124 (3 150)	124 (3 150)	132 (3 353)	156 (3 962)	135 (3 422)
Blade Capacity – yd³ (m³)	2.22 (1.70)	2.62 (2.00)	4.16 (3.18)	5.28 (4.04)	7.29 (5.57)
Maximum Drawbar Pull – lb. (kN)***	42,813 (190.4)	42,813 (190.4)	48,000 (213.5)	61,200 (272.2)	80,979 (360)
Maximum Travel Speed – mph (kph)	5.8 (9.3)	5.2 (8.4)	5.8 (9.3)	5.8 (9.3)	5.8 (9.3)
Total Flow – gpm (L/min)	20.3 (78.8)	20.3 (78.8)	34.9 (132)	34.9 (132)	40.4 (153)
DIMENSIONS	750M WT PAT Blade	850M LGP PAT Blade	1150M LGP PAT Blade	1650M LGP PAT Blade	2050M XLT Semi-U Blade
DIMENSIONS  Height to Top of Cab					
	PAT Blade	PAT Blade	PAT Blade	PAT Blade	Semi-U Blade
Height to Top of Cab	<b>PAT Blade</b> 9 ft 3 in (2 819 mm)	<b>PAT Blade</b> 9 ft 1 in (2 770 mm)	<b>PAT Blade</b> 9 ft 8 in (2 948 mm)	<b>PAT Blade</b> 9 ft 7 in (2 921 mm)	<b>Semi-U Blade</b> 10 ft 2 in (3 103 mm)
Height to Top of Cab  Ground Clearance****	9 ft 3 in (2 819 mm) 1 ft 2 in (355 mm)	9 ft 1 in (2 770 mm)  1 ft 2 in (361 mm)	9 ft 8 in (2 948 mm)  1 ft 1 in (331 mm)	9 ft 7 in (2 921 mm) 1 ft 1 in (321 mm)	Semi-U Blade  10 ft 2 in (3 103 mm)  1 ft 1 in (325 mm)
Height to Top of Cab  Ground Clearance****  Blade Height**	9 ft 3 in (2 819 mm)  1 ft 2 in (355 mm)  2 ft 9 in (841 mm)	9 ft 1 in (2 770 mm)  1 ft 2 in (361 mm)  3 ft 0 in (914 mm)	9 ft 8 in (2 948 mm)  1 ft 1 in (331 mm)  3 ft 8 in (1 119 mm)	9 ft 7 in (2 921 mm) 1 ft 1 in (321 mm) 3 ft 10 in (1 167 mm)	Semi-U Blade  10 ft 2 in (3 103 mm)  1 ft 1 in (325 mm)  3 ft 8 in (1 105 mm)
Height to Top of Cab  Ground Clearance****  Blade Height**  Blade Lift Above Ground	9 ft 3 in (2 819 mm)  1 ft 2 in (355 mm)  2 ft 9 in (841 mm)  2 ft 10 in (853 mm)	9 ft 1 in (2 770 mm)  1 ft 2 in (361 mm)  3 ft 0 in (914 mm)  2 ft 10 in (874 mm)	9 ft 8 in (2 948 mm)  1 ft 1 in (331 mm)  3 ft 8 in (1 119 mm)  3 ft 2 in (956 mm)	9 ft 7 in (2 921 mm)  1 ft 1 in (321 mm)  3 ft 10 in (1 167 mm)  3 ft 8 in (1 130 mm)	Semi-U Blade  10 ft 2 in (3 103 mm)  1 ft 1 in (325 mm)  3 ft 8 in (1 105 mm)  3 ft 10 in (1 168 mm)
Height to Top of Cab  Ground Clearance****  Blade Height**  Blade Lift Above Ground  Blade Depth Below Ground	PAT Blade  9 ft 3 in (2 819 mm)  1 ft 2 in (355 mm)  2 ft 9 in (841 mm)  2 ft 10 in (853 mm)  1 ft 9 in (531 mm)	9 ft 1 in (2 770 mm)  1 ft 2 in (361 mm)  3 ft 0 in (914 mm)  2 ft 10 in (874 mm)  1 ft 7 in (483 mm)	PAT Blade  9 ft 8 in (2 948 mm)  1 ft 1 in (331 mm)  3 ft 8 in (1 119 mm)  3 ft 2 in (956 mm)  1 ft 9 in (539 mm)	9 ft 7 in (2 921 mm)  1 ft 1 in (321 mm)  3 ft 10 in (1 167 mm)  3 ft 8 in (1 130 mm)  1 ft 9 in (539 mm)	Semi-U Blade  10 ft 2 in (3 103 mm)  1 ft 1 in (325 mm)  3 ft 8 in (1 105 mm)  3 ft 10 in (1 168 mm)  1 ft 10 in (545 mm)
Height to Top of Cab  Ground Clearance****  Blade Height**  Blade Lift Above Ground  Blade Depth Below Ground  Length of Track On Ground  Length, Blade Straight	9 ft 3 in (2 819 mm)  1 ft 2 in (355 mm)  2 ft 9 in (841 mm)  2 ft 10 in (853 mm)  1 ft 9 in (531 mm)  7 ft 5 in (2 266 mm)	9 ft 1 in (2 770 mm)  1 ft 2 in (361 mm)  3 ft 0 in (914 mm)  2 ft 10 in (874 mm)  1 ft 7 in (483 mm)  7 ft 9 in (2 352 mm)	9 ft 8 in (2 948 mm)  1 ft 1 in (331 mm)  3 ft 8 in (1 119 mm)  3 ft 2 in (956 mm)  1 ft 9 in (539 mm)  8 ft 6 in (2 591 mm)	9 ft 7 in (2 921 mm)  1 ft 1 in (321 mm)  3 ft 10 in (1 167 mm)  3 ft 8 in (1 130 mm)  1 ft 9 in (539 mm)  10 ft 0 in (3 050 mm)	Semi-U Blade  10 ft 2 in (3 103 mm)  1 ft 1 in (325 mm)  3 ft 8 in (1 105 mm)  3 ft 10 in (1 168 mm)  1 ft 10 in (545 mm)  10 ft 9 in (3 277 mm)
Height to Top of Cab  Ground Clearance****  Blade Height**  Blade Lift Above Ground  Blade Depth Below Ground  Length of Track On Ground  Length, Blade Straight with Ripper	9 ft 3 in (2 819 mm)  1 ft 2 in (355 mm)  2 ft 9 in (841 mm)  2 ft 10 in (853 mm)  1 ft 9 in (531 mm)  7 ft 5 in (2 266 mm)  16 ft 8 in (5 086 mm)	9 ft 1 in (2 770 mm)  1 ft 2 in (361 mm)  3 ft 0 in (914 mm)  2 ft 10 in (874 mm)  1 ft 7 in (483 mm)  7 ft 9 in (2 352 mm)  17 ft 2 in (5 233 mm)	9 ft 8 in (2 948 mm)  1 ft 1 in (331 mm)  3 ft 8 in (1 119 mm)  3 ft 2 in (956 mm)  1 ft 9 in (539 mm)  8 ft 6 in (2 591 mm)  20 ft 2 in (6 150 mm)	9 ft 7 in (2 921 mm)  1 ft 1 in (321 mm)  3 ft 10 in (1 167 mm)  3 ft 8 in (1 130 mm)  1 ft 9 in (539 mm)  10 ft 0 in (3 050 mm)  21 ft 11 in (6 670 mm)	Semi-U Blade  10 ft 2 in (3 103 mm)  1 ft 1 in (325 mm)  3 ft 8 in (1 105 mm)  3 ft 10 in (1 168 mm)  1 ft 10 in (545 mm)  10 ft 9 in (3 277 mm)  22 ft 11 in (6 983 mm)
Height to Top of Cab  Ground Clearance****  Blade Height**  Blade Lift Above Ground  Blade Depth Below Ground  Length of Track On Ground  Length, Blade Straight with Ripper  Width, Blade Straight	9 ft 3 in (2 819 mm)  1 ft 2 in (355 mm)  2 ft 9 in (841 mm)  2 ft 10 in (853 mm)  1 ft 9 in (531 mm)  7 ft 5 in (2 266 mm)  16 ft 8 in (5 086 mm)  9 ft 4 in (2 845 mm)	9 ft 1 in (2 770 mm)  1 ft 2 in (361 mm)  3 ft 0 in (914 mm)  2 ft 10 in (874 mm)  1 ft 7 in (483 mm)  7 ft 9 in (2 352 mm)  17 ft 2 in (5 233 mm)  10 ft 4 in (3 150 mm)	9 ft 8 in (2 948 mm)  1 ft 1 in (331 mm)  3 ft 8 in (1 119 mm)  3 ft 2 in (956 mm)  1 ft 9 in (539 mm)  8 ft 6 in (2 591 mm)  20 ft 2 in (6 150 mm)  11 ft 0 in (3 353 mm)	9 ft 7 in (2 921 mm)  1 ft 1 in (321 mm)  3 ft 10 in (1 167 mm)  3 ft 8 in (1 130 mm)  1 ft 9 in (539 mm)  10 ft 0 in (3 050 mm)  21 ft 11 in (6 670 mm)  13 ft 0 in (3 962 mm)	Semi-U Blade  10 ft 2 in (3 103 mm)  1 ft 1 in (325 mm)  3 ft 8 in (1 105 mm)  3 ft 10 in (1 168 mm)  1 ft 10 in (545 mm)  10 ft 9 in (3 277 mm)  22 ft 11 in (6 983 mm)  12 ft 8 in (3 861 mm)

 $<sup>{}^{\</sup>star}\mathsf{DPF} = \mathsf{Diesel}$  Particulate Filter,  $\mathsf{SCR} = \mathsf{Selective}$  Catalytic Reduction

<sup>\*\*</sup>Various blade options available for each track configuration.

<sup>\*\*\*</sup>Measured using standard track chain. Increase travel speeds by 4% and reduce drawbar pull by 4% with the optional CELT track chain.

\*\*\*Track configuration may impact ground clearance.



### **BUILDING A STRONG CASE**

Since 1842, we at CASE Construction Equipment have lived by an unwavering commitment to build practical, intuitive solutions that deliver both efficiency and productivity. We continually strive to make it easier for our customers to implement emerging technologies and new compliance mandates.

Today, our global scale combined with our local expertise enables us to keep customers' real-world challenges at the center of our product development. This focus has led to numerous innovations like Ride Control™, EZ-EH controls, blade shake, PowerLift™, over-center boom design and the peace of mind that only CASE ProCare provides.

Every CASE machine is backed by more than 350 North American dealer locations, thousands of OEM, remanufactured and Gold Value™ parts, and flexible financing and insurance options that provide the kind of reliable, steadfast support you expect from a professional partner.

We are passionate about improving the lives of others, whether investing in our veterans or raising awareness about local infrastructure initiatives through Dire States. Our goal is to build both stronger machines - and stronger communities.

At the end of the day, we do what's right by our customers and our communities so that they can count on CASE.

#### CaseCE.com/Dozer

©2016 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V. its subsidiaries or affiliates, CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A. Contains 10% post-consumer fiber.

Form No. CCE201611Dozer Replaces Form No. CCE201602Dozer

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly.

NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



SAFETY" Always read the Operator's Manual before operating equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.