CASE
CONSTRUCTION

SR210
SKID STEER LOADER

SR210 Skid Steer Loader

ONE OF OUR BEST – WITH A BOOST.

Thanks to an advanced CEGR solution, our rugged SR200 has gained 100 lb. (45.4 kg) Rated Operating Capacity (ROC) to become the beefier SR210. This new, medium-frame model offers class-leading breakout force, increased torque, an EZ-EH upgrade and other enhancements to take on the most demanding jobs. All while still offering the industry's widest cab, servo controls and fatigue-fighting features that make the Alpha Series so easy and comfortable to use.

SR210 HIGHLIGHTS

1. **New EZ-EH** setup menu provides a simple solution for speed and control customization, as well as a new intuitive lockout option.

2. **Enhanced control handles** for EH machines incorporate additional **industry-exclusive** feel points to aid the operator in feathering the controls.

3. **Maintenance-free Tier 4 Final solution** delivers 10% more power over previous generations – with no additional fluids to add and no filters to replace.

4. **Best-in-class torque, breakout force and standard and high aux flow** to tackle demanding applications.

5. The **widest skid steer cab in the industry** with an available upgraded climate control system and radio to keep operators comfortable year-round.

6. Radial-lift design for superior strength when digging, prying or pushing and perfect for easy loading or unloading of pallets.

7. Low step and threshold make it easy to get in and out of the cab.

8. Standard side lighting, skylight and ultra-narrow wire side-screen provide **best-in-class 360° visibility** day and night.

9. **CASE PowerStance wheelbase** is 21% longer to improve stability during lifting and hauling so operators can handle larger loads and retain more material in transit.

10. **Large 19.5 gal (73.8 L) fuel tank** allows loader to run all day without refueling.

11. Hydraulic quick-coupler enables operators to quickly and easily change attachments from the comfort of the cab.

12. All daily maintenance points are easily accessible from the rear of the machine.

13. New electronic control module feature logs operating data and has CAN-bus capabilities for diagnostic monitoring and telematics.

14. Fatigue-fighting options include push-button Ride Control™, a self-leveling bucket feature, factory-fit foot controls and an advanced instrument cluster with programmable security codes and automatic shutdown.

Maintenance-free Tier 4 Final Solution

The SR210 incorporates a unique Particulate Matter Catalyst* solution to meet Tier 4 Final emissions standards. What does that mean to you? We're proud to say – nothing. It's compliance that requires no extra work. No extra fluid to add. No filters to replace. Just get in and go. It's the best match for a machine of this size that often has multiple operators and is constantly on the go.

*PM Catalyst is made up of a DOC and a high efficiency flow-through filter.

Power starts at the stance.

Strength comes from the ground up – literally. That's why CASE Alpha Series skid steers offer a PowerStance design that's lengthened the wheelbase by up to 21% and gives greater stability operators can feel. It offers greater curb clearance and aids in material retention due to a steadier ride while hauling too. The result is being able to lift more, work faster and be more confident in the capabilities of your CASE skid steer.

Love where you work.

At nearly three-feet wide, Alpha Series skids offer the widest cab in the industry. It's fully sealed and pressurized against noise, dust and fumes to keep out the bad and offers an optional radio and upgraded climate control system to keep in the good. Plus, a low threshold makes for easy entry and exit and its cab-forward design provides excellent site lines to bucket edges, curb lines and rearward.

www.CaseCE.com

CASE CONSTRUCTION

SR210
SKID STEER LOADER

SR210

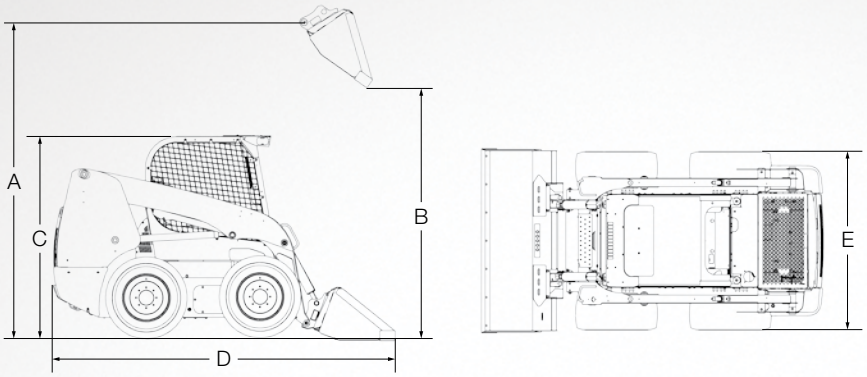

Line drawings are for illustrative purpose only and may not be exact representation of unit.

DIMENSIONS		SR210
A.	Height To Bucket Hinge Pin	123.0 in. (3.12 m)
B.	Dump Height With Low Profile Bucket	95.6 in. (2.43 m) @ 40°
C.	Height To Top Of ROPS	78.7 in. (2.00 m)
D.	Overall Length With Low Profile Bucket	133.7 in. (3.40 m)
E.	Over The Tire Width With Spec Tires	70.0 in. (1.78 m)

SPECIFICATIONS	SR210
Engine Make/Model	FPT F5H FL463 A
Emissions Certification*	Tier 4 Final (Particulate Matter Catalyst)
Gross Hp – hp (kW) @ 2500 RPM	74 (55)
Net Hp – hp (kW) @ 2500 RPM	68 (51)
Peak Torque – lb.·ft. (N·m) @ 1400 RPM	232 (314)
Displacement/Cylinders – in.³ (L)	207 (3.4)/4
Rated Operating Capacity – ROC 50% – lb. (kg)	2,100 (953)
Bucket Cylinder Breakout Force – lb. (kN)	7,270 (32.3)
Auxiliary Hyd. Standard/High Flow – gpm (L/min)	24.2 (91.5) / 33.2 (125.7)
Operating Weight – lb. (kg)	6,970 (3 160)
Tipping Load – lb. (kg)	4,200 (1 905)
Lift Configuration	Radial

NOTE: *PM Catalyst is composed of DOC and a high efficiency flow-through filter;
DOC = Diesel Oxidation Catalyst.

Maintenance Made Easy.

When you buy a CASE, you want it to last. We make it easy. That's why on Alpha Series skid steers, routine service points are all located at the rear of the machine so you quickly access the engine, filters, fill points and whatever you need to properly maintain and extend the life of the machine. On top of that, they also offer our famous easy-tilt cab for convenient access to the drivetrain compartment.

Adaptable Power.

Standard auxiliary hydraulic flow has been increased to 24.2 gpm (91.5 L/min) and optional high flow to 33.2 gpm (125.7 L/min) to power your high-performance attachments making both standard and high flow best-in-class. And with our Connect Under Pressure (CUP) manifolds, you won't need any tools to connect or disconnect hydraulic lines.

CASE Customer Assistance 866-54-CASE6

© 2015 CNH Industrial America LLC. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A.

Form No. CCE201502SR210
Replaces Form No. CCE201406SR210

SAFETY™ NEVER HURTS Always read the operator's manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.

All engines meet current EPA emissions regulations.

All specifications are stated in accordance with SAE standards or recommended practices, where applicable.

Contains 10% post-consumer fiber

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.

Biodiesel Ready CASE construction equipment is biodiesel-friendly.