



ENGINE

Model	FPT F4HE0484G
Emissions Certification	Tier 3
Type	4-stroke, Turbocharged
Cylinders	4
Bore/Stroke	4.09 x 5.19 in (104 x 132 mm)
Displacement	274 in ³ (4.5 L)
Fuel injection	Direct, high pressure common rail – HPCR
Fuel	Diesel
Engine speeds*	RPM
Rated speed – full load	2200
Low idle	900 – 1000
High idle – no load	2330 – 2430
Horsepower @ 2200 RPM:	
Gross	97 hp (72 kW)
Net w/ viscous fan**	95 hp (71 kW)
Net	92 hp (68 kW)
Maximum torque @ 1400 RPM:	
Gross	339 lb-ft (459 N-m)
Net w/ viscous fan**	338 lb-ft (458 N-m)
Net	328 lb-ft (445 N-m)
Torque rise at rated speed	45% +/- 5%
Radiator:	
Core type	Square wave
Core size area	486 in ² (3 145 cm ²)
Rows of tubes	5
Viscous fan:	
Style	9 blade viscous suction
Diameter	19.68 in (500 mm)
Ratio	1.4:1
Pump operating angle ratings:	
Side to side	Rated 35°
Fore and aft	Rated 35°
Oil filtration	Replaceable, full flow cartridge

NOTE: *Engine speeds w/ standard transmission.
Meets federal emission regulations.

**Viscous fan included with
Cab Convenience package.

DRIVETRAIN

Transmission – standard:
4F-4R Power Shuttle Synchronesh
Transmission manual gear shift,
fully synchronized

Transmission – optional:
Powershift S-Type, 4F-3R Power Shuttle,
Synchronesh w/ hydraulic gear shifting

Specifications below apply to both Power
Shuttle and Powershift S-Type transmission
unless otherwise indicated.

Gear ratios	Forward/Reverse
1st	5.603/4.643
2nd	3.431/2.884
3rd	1.584/1.313
4th	0.793/0.657*

Travel speeds	Forward mph (kph)	Reverse mph (kph)
1st	3.9 (6.3)	4.7 (7.6)
2nd	6.2 (10.0)	7.5 (12.0)
3rd	13.3 (21.4)	16.0 (24.9)
4th	24.1 (38.8)	28.9 (46.6)*

Transmission – optional:
Powershift H-Type, 4F-3R hydraulic clutch
shifting w/ auto function

Gear ratios	Forward/Reverse
1st	5.533/4.549
2nd	3.359/2.762
3rd	1.533/1.260
4th	0.811/—

Travel speeds	Forward mph (kph)	Reverse mph (kph)
1st	3.9 (6.2)	4.7 (7.6)
2nd	6.4 (10.3)	7.7 (12.4)
3rd	13.6 (21.9)	16.3 (26.3)
4th	23.0 (37.0)	—

Torque converter ratio	2.4
------------------------	-----

Limited slip differential – 4WD

Front 4WD/Rear axle:

Differential ratio	2.1/2.5
Planetary hub ratio	6.0/6.4
Total reduction ratio	12.8/16.0

Service brakes:

Individually applied, power assisted,
hydraulically actuated, maintenance-free,
self-adjusting, outboard mounted, wet disc,
2 per side.
Total disc area 384 in² (0.25 m²)

Parking brakes Trans Mounted
spring-applied hydraulic release – SAHR

NOTE: *4R not available on Powershift S-type
Travel speeds at 2295 engine
RPM specified: w/ 21.0 L x 24.0 tires.

ELECTRICAL

Voltage	12 Volts, negative ground
Alternator	120 amp
Battery	850 cold-cranking amps
Opt. batteries – 2	850 cold-cranking amps
Power plugs – 2	30 amps total

OPERATOR ENVIRONMENT

ROPS/FOPS certified protective canopy;
Anti-vandalism cover for dash – w/ canopy only;
Rear fenders extensions; Coat hook w/ garment
strap; Interior rearview mirror, convex
3.54 in (90 mm) wide x 10.83 in (275 mm) high;
Non-suspension seat – 180° swivel – Vinyl; 2 in
(50 mm) retractable seat belt; Cup holder/storage
tray mounted on left-hand fender; Right-hand
storage compartment w/ lid.

Gauges:

Engine water temperature; Converter oil
temperature; Fuel level; Tachometer/
hourmeter; Voltmeter.

Warning lights:

Air cleaner restriction; Alternator; A/C high
pressure; Cold start; Engine oil pressure;
Hydraulic oil filter bypass; Parking brake
engagement; Low fuel.

Audible alarms w/ diagnostics:

Coolant temperature; Engine oil pressure;
Parking brake engagement; Converter oil
temperature; Shuttle engagement/seat
position; Backup alarm.

Horn Dual switched front and rear

OPERATING WEIGHT

Configuration – SAE Transport:

93 in (2.36 m) bucket, PST, 4WD, 21.0 L x 24.0
rear tires, Extendahoe®, 24 HD bucket, flip
stabilizer pads, 2-Door ROPS cab, air
suspension seat, dual battery, backhoe coupler,
auxiliary backhoe hydraulics, comfort steer,
no operator:

19,985 lb (9 065 kg)

Add-on weights:

Cab-over canopy	309 lb (140 kg)
Fabricated stabilizer pads	141 lb (64 kg)
Counterweights	700 lb (318 kg)
	1,100 lb (500 kg)
Extendahoe®	335 lb (152 kg)
4WD w/ driveshaft guard	393 lb (178 kg)

HYDRAULICS

Pump: Bosch Rexroth Series 31 Variable Displacement Axial Piston Pump	
Main relief pressure: Standard 3,450 +/- 50 psi (238 +/- 3.5 bar) Power Lift 3,780 +/- 50 psi (261 +/- 3.5 bar)	
Filtration: 7-micron, full flow replaceable cartridge on return line, condition indicator light for filter.	
Oil cooler	Heavy-duty
Loader flow @ rated engine RPM: 41 gpm @ 2,340 psi (155.2 L/min @ 161 bar)	
Loader control valve w/ pilot or manual backhoe controls: Two or three-spool closed center sectional control valve. Single lever manual control for lift and tilt functions. The three-spool valve uses a proportional Electro-Hydraulic control for the auxiliary function. The lift lever has a positive hold "Float" position and a "return-to-dig" feature.	
Loader auxiliary hydraulics w/ proportional thumb switch w/ detent on loader control handle: 0 – 41 gpm (0 – 156.2 L/min)	
Backhoe flow @ rated engine RPM: 41 gpm @ 3,100 psi (156.2 L/min @ 161 bar)	
Manual backhoe control valve: Six or seven-spool monoblock open center control valve. Features "Pro-Control" which includes custom designed spools for each individual function along w/ "swing cushioning" valve for zero-wag swing control. Basic control valve has an open center parallel circuit for all functions.	

Pilot backhoe control valve:
Six, seven, or eight-spool sectional closed center control valve. Features "Pro-Control" which includes custom designed spools for each individual function along w/ "swing cushioning" valve for zero-wag swing control. Basic control valve is closed center, w/ circuits in parallel w/ a post-compensated, flow sharing feature for simultaneous operation of all circuits.

Unidirectional auxiliary hydraulics:
Unidirectional hydraulic valve is equipped w/ an adjustable LS relief valve to control attachment pressure and a 6 position flow control selector for 6 detented, distinct flow settings.

Actuation:
Manual backhoe controls – cab floor pedal
Pilot controls – left-hand joystick

Bidirectional auxiliary hydraulics*:
Actuation:
Activate the bidirectional switch located on the rear console
Manual shift – bidirectional linkage on far right of backhoe tower
Pilot controls – left-hand joystick.

NOTE: *Available w/ Combo Aux. Hyd. option.

SERVICE CAPACITIES

Fuel tank	42.0 gal (159.0 L)
Hydraulic system:	
Total	130 qt (123.0 L)
Total w/ Extendahoe®	136 qt (128.7 L)
Reservoir w/ filter	58 qt (55.0 L)
Reservoir w/o filter	56 qt (53.0 L)
Transmission – total system:	
4WD Standard	21 qt (19.4 L)
4WD Powershift S-Type	22 qt (20.7 L)
4WD Powershift H-Type	19 qt (18.0 L)

Front axle:	
4WD Differential	9.1 qt (8.6 L)
4WD Planetaries – each	1.1 qt (1.0 L)
Rear axle:	
Differential	19.7 qt (18.6 L)
Engine oil w/ filter	14.4 qt (13.6 L)
Cooling system:	
w/ heater	19.0 qt (18.0 L)
w/o heater	18.3 qt (17.3 L)
Window washer reservoir	3.0 qt (2.8 L)

OTHER SPECIFICATIONS

Front tires:	
4WD	12.5/80.0 x 18.0, 10-ply rating
Rear tires:	
4WD	21.0 L x 24.0, 10-ply rating
Loader: Bucket position indicator; Lifting lugs on standard bucket; Single lever control w/ self-leveling and return-to-dig; Hand operated clutch disconnects on loader and shift levers, single lever 4-function loader control: lift, dump, clutch cut-out, differential lock.	

Turning radius*: Curb to Curb

4WD – engaged:	
Brakes on	12 ft 0 in (3.65 m)
Brakes off	14 ft 11 in (4.54 m)
4WD – disengaged:	
Brakes on	11 ft 3 in (3.43 m)
Brakes off	13 ft 6 in (4.11 m)

Backhoe:
Over center design, Fabricated "S" boom; Pro Control System; Case mechanical coupler; Power Lift.


NOTE: *Turning radius dimensions curb to curb w/ 21.0 L x 24.0 rear tires.

LOADER BUCKET SIZES

Type	Width	Weight	Struck	Heaped Capacity
Long Lip Bucket with bolt-on edge	93 in (2.36 m)	1,188 lb (539 kg)	1.10 yd ³ (0.84 m ³)	1.29 yd ³ (0.99 m ³)
4 IN 1® Bucket with bolt-on edge	93 in (2.36 m)	1,685 lb (764 kg)	1.0 yd ³ (0.76 m ³)	1.20 yd ³ (0.92 m ³)

BACKHOE BUCKET SIZES

Type	Width	Weight	Heaped Capacity
Universal Buckets	12 in (305 mm)	295 lb (134 kg)	3.40 ft ³ (0.10 m ³)
	18 in (457 mm)	356 lb (162 kg)	5.30 ft ³ (0.15 m ³)
	24 in (610 mm)	427 lb (194 kg)	7.70 ft ³ (0.22 m ³)
	30 in (762 mm)	489 lb (222 kg)	10.20 ft ³ (0.29 m ³)
	36 in (914 mm)	552 lb (251 kg)	12.70 ft ³ (0.36 m ³)
High Capacity Buckets	24 in (610 mm)	447 lb (203 kg)	8.50 ft ³ (0.24 m ³)
	30 in (762 mm)	502 lb (228 kg)	10.60 ft ³ (0.30 m ³)

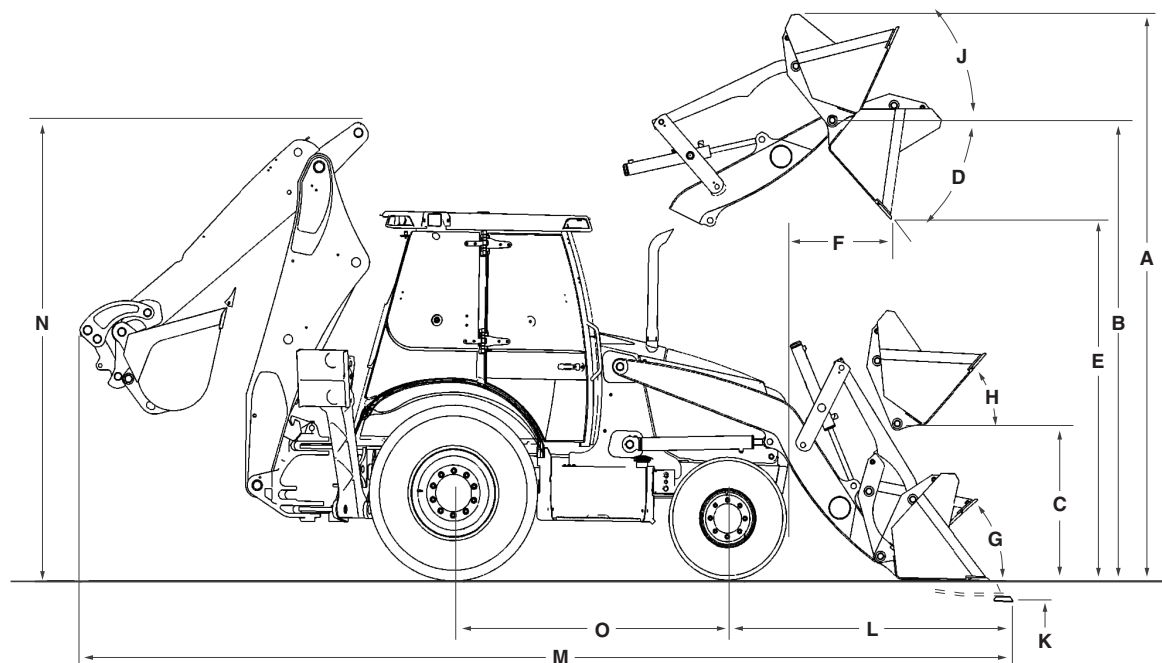

Line drawings are for illustrative purpose only and may not be exact representation of unit.

LOADER DIMENSIONS

	Long Lip Bucket	4 IN 1® Bucket
A. Overall operating height – fully raised	13 ft 11 in (4.24 m)	13 ft 10 in (4.22 m)
Height to:		
B. Bucket hinge pin fully raised	11 ft 6 in (3.50 m)	11 ft 6 in (3.50 m)
C. Bucket hinge pin at SAE carry	12.75 in (324 mm)	12.75 in (324 mm)
D. Dump angle at full height	45°	45°
E. Dump clearance at full height, 43° dump:		
Bucket	8 ft 11 in (2.73 m)	9 ft 1 in (2.77 m)
Clam open	—	9 ft 11 in (3.01 m)
F. Dump reach at full height, 45° dump – from bumper:		
Bucket	27.0 in (685 mm)	27.0 in (685 mm)
Clam open	—	13.9 in (353 mm)
Bucket rollback:		
G. @ Groundline	40°	41°
H. @ SAE carry	46°	46°
J. @ Full height	Adjustable	Adjustable
K. Digging depth below grade:		
Bucket flat	6.1 in (156 mm)	5.9 in (151 mm)
Clam open – dozing	—	3.5 in (88 mm)
L. Reach from front axle centerline – bucket on ground	6 ft 9 in (2.05 m)	6 ft 6 in (1.99 m)
Lift capacity to full height – calculated values	8,425 lb (3 822 kg)	8,025 lb (3 640 kg)
Breakout force:		
Lift cylinders	11,450 lb (5 093 daN)	11,241 lb (5 000 daN)
Dump cylinders	10,873 lb (4 837 daN)	11,674 lb (5 193 daN)
Bucket cutting edge width	94.2 in (2.39 m)	93.0 in (2.36 m)
Maximum grading angle	106°	106°
Maximum clam opening	—	38.3 in (972 mm)
Moldboard height	—	36.8 in (934 mm)
Raising time to full height	3.7 sec	3.7 sec
Bucket dumping time	2.0 sec	2.0 sec
Lowering time:		
Power down	2.5 sec	2.5 sec
Return-to-dig – manual controls/pilot controls	3.6 sec	3.0 sec
Clam:		
Open time	—	1.3 sec
Close time	—	1.1 sec

NOTE: Loader dimensions taken with 4WD, 21.0 L x 24.0 rear tires.

DIMENSIONS

Standard Backhoe		Extendahoe®	
		Retracted	Extended
M. Overall transport length:	Long Lip bucket	23 ft 4 in (7.11 m)	–
	4 IN 1® bucket	23 ft 1 in (7.04 m)	–
	Overall transport width	8 ft 6 in (2.59 m)	–
Height – 4WD with 21.0 L x 24.0 tires:	To top of canopy	8 ft 11 in (2.70 m)	8 ft 11 in (2.70 m)
	To top of cab	8 ft 11 in (2.73 m)	8 ft 11 in (2.73 m)
	To top of exhaust stack	8 ft 9 in (2.67 m)	8 ft 9 in (2.67 m)
	N. Transport	11 ft 1 in (3.37 m)	–
Ground clearance at backhoe frame		14.8 in (377 mm)	14.8 in (377 mm)
Angle of departure		18.6°	18.6°
Wheel tread:			
12.5/80.0 x 18.0		75.6 in (1.92 m)	75.6 in (1.92 m)
21.0 L x 24.0		69.6 in (1.77 m)	69.6 in (1.77 m)
Width over tires:			
12.5/80.0 x 18.0		88.2 in (2.24 m)	88.2 in (2.24 m)
21.0 L x 24.0		91.8 in (2.33 m)	91.8 in (2.33 m)
O. Wheelbase:			
21.0 L x 24.0		84.5 in (2.15 m)	84.5 in (2.15 m)

CYLINDERS

	Bore Diameter	Rod Diameter	Stroke	Closed Length
Loader:				
Lift – 2	3.50 in (88.9 mm)	1.88 in (47.6 mm)	29.13 in (740.0 mm)	41.54 in (1 055.0 mm)
Bucket – 2	3.00 in (76.2 mm)	1.50 in (38.1 mm)	20.33 in (516.5 mm)	29.90 in (759.5 mm)
4 IN 1® clam – 2	3.00 in (76.2 mm)	1.75 in (44.5 mm)	9.08 in (230.6 mm)	19.62 in (498.3 mm)
Backhoe:				
Boom	5.00 in (127.0 mm)	2.50 in (63.5 mm)	38.25 in (971.6 mm)	52.82 in (1 341.6 mm)
Dipperstick	4.75 in (120.7 mm)	2.50 in (63.5 mm)	25.14 in (628.5 mm)	39.65 in (1 007.0 mm)
Bucket	3.50 in (88.9 mm)	2.50 in (63.5 mm)	35.35 in (897.9 mm)	48.17 in (1 223.6 mm)
Extendahoe®	3.00 in (76.2 mm)	1.75 in (44.5 mm)	42.05 in (1 068.0 mm)	56.22 in (1 428.0 mm)
Swing – 2	4.00 in (101.6 mm)	2.00 in (50.8 mm)	11.50 in (292.0 mm)	24.44 in (620.8 mm)
Stabilizer – 2	5.25 in (133.4 mm)	2.50 in (63.5 mm)	20.40 in (518.1 mm)	33.57 in (852.7 mm)

AXLE RATINGS

	Front – 4WD	Rear
Maximum static	67,883 lb (30 791 kg)	70,848 lb (32 136 kg)
Dynamic operating	47,426 lb (21 512 kg)	49,494 lb (22 450 kg)
Static operating	18,969 lb (8 604 kg)	19,798 lb (8 980 kg)
Oscillation – front axle	22° total – 11° side to side	22° total – 11° side to side

BACKHOE LIFT CAPACITIES

Standard Backhoe			Extendahoe®			
Boom Lift	Standard	Power Lift	Retracted		Extended	
	Lift Capacity lb (kg)	Lift Capacity lb (kg)	Standard Lift Capacity lb (kg)	Power Lift Lift Capacity lb (kg)	Standard Lift Capacity lb (kg)	Power Lift Lift Capacity lb (kg)
+16 ft (4.87 m)	—	—	—	—	2,115 (959)	2,447 (1 110)
+14 ft (4.27 m)	3,039 (1 378)	3,484 (1 580)	2,837 (1 287)	3,282 (1 489)	2,395 (1 086)	2,769 (1 256)
+12 ft (3.66 m)	3,413 (1 548)	3,913 (1 775)	3,201 (1 452)	3,701 (1 679)	2,536 (1 151)	2,935 (1 331)
+10 ft (3.05 m)	3,499 (1 587)	4,015 (1 821)	3,281 (1 488)	3,797 (1 722)	2,593 (1 176)	3,001 (1 361)
+8 ft (2.44 m)	3,485 (1 581)	4,005 (1 817)	3,263 (1 480)	3,783 (1 716)	2,564 (1 163)	2,972 (1 348)
+6 ft (1.83 m)	3,438 (1 559)	3,957 (1 795)	3,213 (1 457)	3,732 (1 693)	2,549 (1 156)	2,961 (1 343)
+4 ft (1.22 m)	3,374 (1 530)	3,890 (1 764)	3,146 (1 427)	3,662 (1 661)	2,521 (1 144)	2,935 (1 331)
+2 ft (0.61 m)	3,307 (1 500)	3,820 (1 733)	3,077 (1 396)	3,590 (1 628)	2,489 (1 129)	2,904 (1 317)
Ground Level	3,251 (1 475)	3,761 (1 706)	3,018 (1 369)	3,528 (1 600)	2,489 (1 129)	2,904 (1 317)
-2 ft (0.61 m)	3,201 (1 452)	3,710 (1 683)	2,965 (1 345)	3,474 (1 576)	2,466 (1 118)	2,882 (1 307)
-4 ft (1.22 m)	3,175 (1 440)	3,686 (1 672)	2,935 (1 331)	3,446 (1 563)	2,446 (1 109)	2,866 (1 300)
-6 ft (1.83 m)	3,182 (1 443)	3,699 (1 678)	2,938 (1 333)	3,455 (1 567)	2,443 (1 108)	2,869 (1 301)
-8 ft (2.44 m)	3,258 (1 478)	3,792 (1 720)	3,007 (1 364)	3,541 (1 606)	2,465 (1 118)	2,899 (1 315)
-10 ft (3.05 m)	3,441 (1 561)	3,951 (1 792)	3,175 (1 440)	3,685 (1 671)	2,530 (1 148)	2,979 (1 351)
-12 ft (3.66 m)	—	—	—	—	2,707 (1 228)	3,187 (1 446)
-14 ft (4.27 m)	—	—	—	—	3,239 (1 469)	3,759 (1 705)
Dipper Lift						
+14 ft (4.27 m)	—	—	—	—	4,281 (1 942)	4,281 (1 942)
+12 ft (3.66 m)	5,822 (2 641)	5,822 (2 641)	5,618 (2 548)	5,618 (2 548)	4,046 (1 835)	4,046 (1 835)
+10 ft (3.05 m)	5,600 (2 540)	5,600 (2 540)	5,399 (2 449)	5,399 (2 449)	3,984 (1 807)	3,984 (1 807)
+8 ft (2.44 m)	5,562 (2 523)	5,562 (2 523)	5,360 (2 431)	5,360 (2 431)	3,913 (1 775)	3,913 (1 775)
+6 ft (1.83 m)	6,236 (2 829)	6,236 (2 829)	6,030 (2 735)	6,030 (2 735)	4,166 (1 889)	4,166 (1 889)
+4 ft (1.22 m)	7,424 (3 368)	7,424 (3 368)	7,203 (3 267)	7,203 (3 267)	4,102 (1 861)	4,102 (1 861)
+2 ft (0.61 m)	—	—	—	—	4,850 (2 200)	4,850 (2 200)

NOTE: Boom and Dipper Lift Capacities are rated per SAE J31 and are 87% of the maximum hydraulic lift force available with the specified options.

BACKHOE OPERATIONAL DATA

Standard Backhoe		Extendahoe®	
		Retracted	Extended
Digging depth:			
Maximum	14 ft 6 in (4.43 m)	14 ft 6 in (4.43 m)	18 ft 0 in (5.48 m)
Maximum with hi-capacity bucket	15 ft 1 in (4.59 m)	15 ft 1 in (4.59 m)	18 ft 6 in (5.64 m)
2 ft (610 mm) flat bottom	14 ft 5 in (4.39 m)	14 ft 5 in (4.39 m)	17 ft 11 in (5.45 m)
8 ft (2.44 m) flat bottom	13 ft 5 in (4.09 m)	13 ft 5 in (4.09 m)	17 ft 1 in (5.22 m)
Overall reach from:			
Rear axle centerline	21 ft 11 in (6.68 m)	21 ft 11 in (6.68 m)	25 ft 4 in (7.71 m)
Swing pivot	18 ft 3 in (5.56 m)	18 ft 3 in (5.56 m)	21 ft 8 in (6.60 m)
Loading height	12 ft 0 in (3.66 m)	12 ft 0 in (3.66 m)	14 ft 4 in (4.38 m)
Loading reach	4 ft 8 in (1.42 m)	4 ft 8 in (1.42 m)	7 ft 3 in (2.22 m)
Swing arc	180°	180°	180°
Bucket rotation:			
Mechanical coupler	198.0°	198.0°	198.0°
Hydraulic coupler – Extendahoe® dipper	194.8°	194.8°	194.8°
Hydraulic coupler – standard dipper	198.0°	198.0°	198.0°
Stabilizer spread – operating:			
Flip pad	10 ft 9 in (3.28 m)	10 ft 9 in (3.28 m)	10 ft 9 in (3.28 m)
Cast pad	11 ft 1 in (3.38 m)	11 ft 1 in (3.38 m)	11 ft 1 in (3.38 m)
Digging force:			
Bucket cylinder – SAE rated 3,460 psi	13,576 lb (60 388 N)	13,576 lb (60 388 N)	13,576 lb (60 388 N)
Bucket cylinder – Power Lift	14,831 lb (65 972 N)	14,831 lb (65 972 N)	14,831 lb (65 972 N)
Dipper cylinder – SAE rated 3,460 psi	8,657 lb (38 508 N)	8,657 lb (38 508 N)	6,305 lb (28 045 N)
Dipper cylinder – Power Lift	9,458 lb (42 071 N)	9,458 lb (42 071 N)	—
Leveling angle:			
Flip pad	11.5°	11.5°	11.5°
Cast pad	12.4°	12.4°	12.4°

NOTE: Lift capacities apply straight to the rear of prime mover. Equipped with 24 in (610 mm) Universal heavy-duty trenching bucket and Case coupler except as noted.

STANDARD EQUIPMENT

OPERATOR ENVIRONMENT

See page 1

ENGINE

FPT F4HE0484G diesel
Full flow engine oil filter
Air cleaner – replaceable dry type
with radial seal
Aspirated air cleaner
Muffler, non spark arresting
Fuel filter with water trap
Radiator with de-aeration bottle
Antifreeze to -34° F (-37° C)
Self-adjusting belt
Electronic throttles – foot and rotary hand
High Pressure Common Rail computer
controlled injection with diagnostic features

DRIVETRAIN

Powershift S-Type transmission, 4F-3R
fully synchronized electronic transmission
controller and kick down in loader
control lever
Front axle:
4WD heavy-duty mechanically driven front
axle with 14.0 x 17.5 tires, limited slip
differential and drive shaft guard
Rear axle:
4WD heavy-duty outboard planetary drive
with 21.0 x 24.0 tires
Torque converter – 11.8 in (305 mm)
On-the-go electric 4WD control
Electric F/R shuttle control
Electric differential lock control, push-button
Park brake, spring-applied, hydraulic
release – SAHR

HYDRAULICS

Variable displacement axial piston pump
Pump:
41 gpm @ 3,000 psi
(156.2 L/min @ 207 bar)
Heavy-duty oil cooler
7-micron, spin on oil filter

LOADER

See page 2

BACKHOE

Power Lift
See page 2

OTHER

Forward tilt engine hood
Replaceable, molded front bumpers
Front/Rear tie downs
Reflective logos
Lights – cab and canopy:
2 front driving
2 rear tail/stop
2 front flashers/turn
2 rear flashers/turn
Lights cab only:
Adjustable halogen work lights – 55 W:
2 front
2 side – left and right
4 rear
Lights canopy only:
Adjustable halogen work lights – 55 W:
2 front
2 side – left and right
4 rear

OPTIONAL EQUIPMENT

OPERATOR ENVIRONMENT

Ride Control
Comfort Steering with momentary latching switch, two speed steering pump and 3rd/4th gear cutout
ROPS/FOPS certified protective cab with rear wipers and floor mat
Cab Convenience Package containing pull-down sun visor, window washer – front and rear, left-hand storage tray, deluxe interior package, Sound Reduction Package for cab models – levels reduced to 72 dB (A), right-hand threshold storage box, viscous fan
Air-conditioning for cab models
Mechanical suspension seat with flip-up armrests, 180° swivel, cloth or vinyl, adjustable seat and weight, backrest angle, lumbar and cushion angle
Air Ride suspension seat with flip-up armrests, 180° swivel, heated, electric height adjustment, adjustable back rest and lumbar support – cab units cloth, canopy units vinyl
Pull-down sun visor for canopy models
Radio, AM/FM Stereo/WB, MP3 auxillary input – cab models
3 in (75 mm) seat belt for mechanical and air suspension seat

ENGINE

Cold Weather Starting Aid
grid heater with dual 12 Volt batteries

DRIVETRAIN

Powershift S-Type transmission, 4F-3R electronic transmission controller and kick down in loader control lever – 4WD only
Powershift H-Type transmission, 4F-3R hydraulic clutch shifting with auto function 4WD Only
Rear axle heavy-duty outboard planetary drive with 19.5 L x 24.0 tires – 4WD only

LOADER

Auxiliary hydraulics for loader-mounted equipment with thumb-operated proportional control
Hydraulic front quick coupler
Loader linkage without loader bucket
Tool portfolio of additional attachments
Buckets – see page 2

BACKHOE

Auxiliary backhoe unidirectional hydraulics
Auxiliary backhoe combo hydraulics:
Hand lever operated for manual controls
Button operated for pilot controls includes unidirectional and bidirectional
Auxiliary hydraulics with flow from 0 to 41 gal/min (0 to 156.2 L/min)
Extendahoe®

Power Lift
Bolt-on hardened gripper teeth
Two-lever control – backhoe or Extendahoe®
Pilot operated control system:
Fingertip proportional Electro-Hydraulic stabilizer controls
Thumb-operated proportional Electro-Hydraulic Extendahoe® control
Thumb-operated horn button
Thumb-operated auxiliary hydraulic control
Infinitely adjustable towers
In-cab switchable “excavator to backhoe” control pattern change
Flip over stabilizer pads
Cemetery pads
Hydraulic bucket quick coupler
Buckets – see page 2

OTHER

Front:
14.5 x 17.5
Rear:
21 L x 24
Special paint
Tool box – bolt-on, step-mounted
Front counterweights:
700 lb and 1,100 lb (318 kg and 500 kg)
Rotating beacon
Master disconnect switch and remote jump-start terminals

CaseCE.com

©2016 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A. Contains 10% post-consumer fiber.

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.

Form No. CCE201603580SNWTT3
Replaces Form No. CCE201506580SNWTT3

580SN WT

7 of 7