



ENGINE

Model	F5CE 5454 G* A001
Emissions Certification	Tier 3/Tier 4 Interim
Type	Diesel, Turbo – Direct Injection
Cylinders	4
Bore/Stroke	3.9 x 4.1 in (99 x 104 mm)
Displacement	195 in ³ (3.2 L)
Fuel injection	Direct
Fuel	#2 Diesel
Fuel filter	In-line strainer
Oil filtration	Spin-on/full-flow cartridge
Air intake	Turbocharged w/o waste gate
Cooling	Liquid
Engine speeds	RPM
High idle – no load	2675 +/- 75
Rated – full load	2500
Low idle	1075 +/- 75
Horsepower @ 2500 RPM – SAE J1349:	
Gross	74 hp (55 kW)
Net	68 hp (51 kW)
Peak torque @ 1400 RPM	203 lb-ft (275 N-m)
Radiator:	
Core type	All aluminum
Core size area	399 in ² (0.257 m ²)
Rows of tubes x columns	43 x 3
Cap pressure	16 +/- 2 psi (1.10 +/- 0.14 bar)
Fan:	
Diameter	18.9 in (480 mm)
Ratio	0.96:1
Water pump:	
Style	Centrifugal
Flow	29 gpm (110 L/min)
Engine lubrication pump:	
Rotor pump w/ deep sump pan, plate cooler and pressurized under-piston nozzles	
Pump operating angle ratings:	
Side to side	45°
Bucket up	35°
Bucket Down	45°

DRIVETRAIN

Drive pump controls	Electro-hydraulic
Pump to engine ratio	1:1
Displacement	2.81 in ³ (46 cm ³)
Flow @ rated engine RPM:	
@ 97% efficiency	29.4 gpm (111.3 L/min)
Charge pressure:	
360 +/- 10 psi (24.5 +/- 0.5 bar)	
System relief	5,220 psi (360 bar)

Drive motors:	
Max. displacement	3.10 in ³ (50.9 cm ³)
Optional high speed	2.02 in ³ (33.1 cm ³)
Speed @ high idle engine RPM	
100% efficiency @ rated engine RPM	103
Speed @ optional high speed RPM	156
Torque @ max. displacement and relief pressure	4,654 lb-ft (6 310 N-m)

Travel speed:	
Low range	5.1 mph (8.2 kph)
High range – optional	7.6 mph (12.2 kph)
Final drive	Planetary reduction

Parking brake:	
Type	Spring-applied, hydraulic release disc
Engagement	Depress on/off brake button on handle or instrument panel, raise seat bar, get off seat or stop engine

ELECTRICAL

Alternator	120 amp
Starter	4.29 hp (3.2 kW)
Battery	12-volt low-maintenance 925 cold-cranking amps @ 0° F (-18° C°)

OPERATOR ENVIRONMENT

ROPS/FOPS Level 1 canopy w/ side screens; Keyed start ignition; Tilt ROPS/FOPS; Rear window w/ emergency escape; Suspension Seat, vinyl w/ 2 in (51 mm) retractable 3 point lap seat belt; Hand and foot throttles; Alarm package – back-up and horn; Headliner; Dome Light; Top window; Cup holder; 12V Power plug socket; Foot rest; Seat pocket; Padded seat bar w/ integral armrests; Loader control lockout system; Electric parking brake control; Operator's compartment floor cleanout; Proportional auxiliary hydraulic control – on joystick; Advanced Instrument Cluster w/ digital hour meter, tachometer, Fuel level LCD bar graph w/ alarm, diagnostic features and security lockout.

Warning lights with alarms:
Engine coolant temperature; Engine oil pressure; Engine malfunction; Hydraulic charge pressure; Hydraulic filter restriction; Hydraulic oil temperature; Critical system stop, Engine system, Hydraulic system, Electrical and diagnostic system.

Warning alarms:
Battery voltage – plus display; Oil service.

Indicator light:
Engine preheat; Parking brake;
Seat bar reminder.

OPERATING WEIGHT

Operating weight	8,270 lb (3 750 kg)
Shipping weight	7,970 lb (3 615 kg)
Add-on weights:	
Side cab glass	47 lb (21.3 kg)
Lexan® door	74 lb (33.6 kg)
Glass cab door w/ wiper	134 lb (60.8 kg)
Suspension seat	22 lb (10.0 kg)

HYDRAULICS

Standard equipment pump type	Gear
Displacement:	
Standard aux.	2.08 in ³ (34.1 cm ³)

Pump flow @ rated engine RPM:	
@ 100% efficiency	24.2 gpm (91.5 L/min)

Loader control valve:	
Type	3 spool/Open center/Series
Relief pressure	3,000 psi (207 bar)

Port relief pressures:	
Loader raise	3,263 psi (225 bar)
Bucket dump	3,770 psi (260 bar)
Bucket curl	1,160 psi (80 bar)

Hydraulic lines:	
Tubing	37° JIC Flare
Loop hoses	SAE 100 R13

Hydraulic oil cooler:	
Number of fins	10 per inch (3.94 per cm)
Number of tube rows x columns	9 x 1
Area	136.5 in ² (887 cm ²)

Hydraulic filter	6 micron/Spin-on
------------------	------------------

Lift cylinders:	
Bore diameter	2.50 in (63.5 mm)
Rod diameter	1.75 in (44.5 mm)
Stroke	31.69 in (804.9 mm)
Closed length	45.59 in (1 158.0 mm)


Bucket cylinders:	
Bore diameter	2.75 in (69.9 mm)
Rod diameter	1.38 in (34.9 mm)
Stroke	16.14 in (410.0 mm)
Closed length	24.02 in (610.0 mm)

SERVICE CAPACITIES

Fuel Tank	20 gal (75.7 L)
Engine oil w/ filter	10.0 qt (9.5 L)
Hydraulic system:	
Reservoir	5.3 gal (20 L)
Total	8.5 gal (32.2 L)

PERFORMANCE SPECS

Rated operating load:	
35% of tipping load	1,890 lb (860 kg)
50% of tipping load	2,700 lb (1 225 kg)
Tipping load	5,400 lb (2 449 kg)
Breakout forces:	
Bucket cylinders	7,270 lb (32.3 kN)
Lift cylinders	6,260 lb (27.8 kN)
Cycle times:	
Raise	3.7 sec
Lower	1.9 sec
Dump	2.3 sec
Roll back	1.7 sec

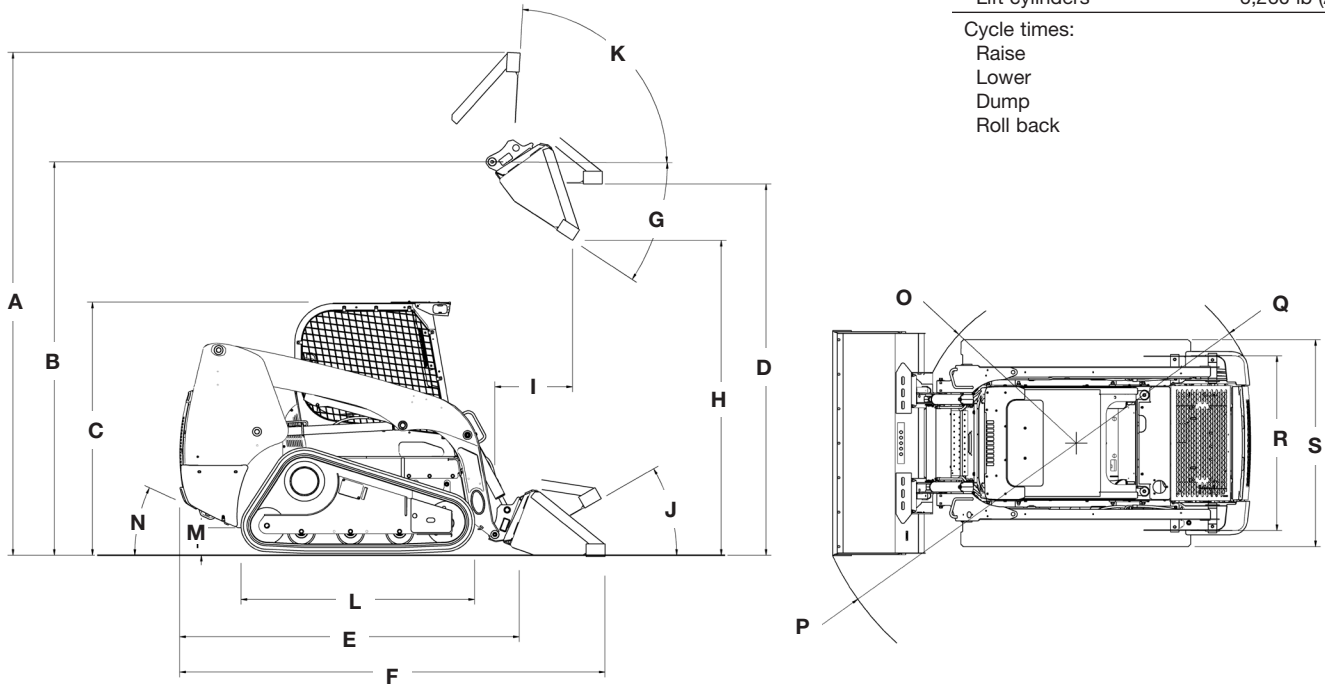

Line drawings are for illustrative purpose only and may not be exact representation of unit.

DIMENSIONS

A. Overall operating height:	
with foundry/excavating bucket short lip	154.3 in (3.92 m)
with low profile/standard lip bucket	158.3 in (4.02 m)
with low profile extended/long lip bucket	163.2 in (4.15 m)
Height to:	
B. Bucket hinge pin	123.0 in (3.12 m)
C. Top of ROPS	78.7 in (2.00 m)
D. Bottom of level bucket, fully raised	116.1 in (2.95 m)
Overall length:	
E. without attachment with coupler	105.1 in (2.67 m)
F. with foundry/excavating bucket on ground	129.6 in (3.29 m)
with low profile bucket	133.7 in (3.40 m)
with low profile extended bucket	138.8 in (3.53 m)
G. Dump angle	39.6°
H. Dump height:	
with foundry/excavating bucket short lip	98.2 in (2.50 m) @ 39.6°
with low profile/standard lip bucket	95.6 in (2.43 m) @ 39.6°
I. Dump reach – max. height	22.3 in (0.65 m) @ 39.6°
Maximum attachment rollback:	
J. Bucket on ground	31.0°
K. Bucket at full height	98.6°
L. Track on ground	56.7 in (1.44 m)
M. Ground clearance – bottom of belly pan	8.0 in (0.20 m)
N. Angle of departure	32.0°
Clearance circle:	
O. without bucket	50.7 in (1.29 m)
P. with 72 in (1.8 m) foundry/excavating bucket in carry position	79.9 in (2.03 m)
with 72 in (1.8 m) low profile bucket on ground	83.1 in (2.11 m)
with 72 in (1.8 m) extended low profile on ground	87.7 in (2.23 m)
Q. Clearance circle rear	62.9 in (1.60 m)
R. Track width	53.4 in (1.36 m)
S. Over the track width	65.9 in (1.68 m)

TRACK SELECTION

Type	Area	Ground Pressure	Width to Outside of Track
12.6 in (320 mm)	1,424 in ² (9 187 cm ²)	5.9 psi (40.5 kPa)	65.9 in (1.7 m)

OPTIONAL BUCKETS

Type	Width	Weight	Heaped Capacity
Dirt & Foundry	66 in (1.68 m)	440 lb (200 kg)	14.8 ft ³ (0.42 m ³)
	78 in (1.98 m)	440 lb (200 kg)	18.4 ft ³ (0.52 m ³)
Low Profile	72 in (1.83 m)	420 lb (190 kg)	14.8 ft ³ (0.42 m ³)
Low Profile Extended	66 in (1.68 m)	440 lb (200 kg)	15.9 ft ³ (0.45 m ³)
	78 in (1.98 m)	440 lb (200 kg)	18.6 ft ³ (0.53 m ³)
	84 in (2.13 m)	575 lb (262 kg)	20.2 ft ³ (0.57 m ³)
Light Material	72 in (1.83 m)	420 lb (190 kg)	23.3 ft ³ (0.66 m ³)
	84 in (2.13 m)	575 lb (262 kg)	27.9 ft ³ (0.79 m ³)
Manure & Slurry	72 in (1.83 m)	420 lb (190 kg)	19.1 ft ³ (0.54 m ³)
	84 in (2.13 m)	575 lb (262 kg)	22.5 ft ³ (0.64 m ³)
Heavy-Duty	66 in (1.68 m)	440 lb (200 kg)	13.1 ft ³ (0.37 m ³)
	78 in (1.98 m)	440 lb (200 kg)	15.9 ft ³ (0.45 m ³)

STANDARD EQUIPMENT

OPERATOR ENVIRONMENT

See page 1

ENGINE

F5CE 5454 G*A001
195 CID (3.2 L) Turbo
Non-regulated
Tier 3/Tier 4 Interim
Turbocharged without waste gate
fuel injection
Horsepower:
Gross: 74 hp (55 kW)
Net: 68 hp (51 kW)
Peak torque 203 lb-ft (275 N·m)
120 amp alternator
Dual element air cleaner
Organic Acid Technology (OAT)
Anti-freeze solution to -34° F
Fuel tank - 20 gal (U.S.)
Over and under radiator and oil cooler
3-stack after cooler/radiator/oil
cooler configuration
Glow plugs
Integral engine oil cooler
Fuel filter with water trap
925 CCA 12V battery
Master electrical disconnect

DRIVETRAIN

2-speed hydrostatic four wheel drive
SAHR disc parking brake

HYDRAULICS

Auxiliary hydraulics:
@ 3,050 psi (210 bar) – 24.2 gpm
(91.5 L/min)
6 micron oil filtration system
3-spool loader control valve
Auxiliary hydraulic disconnects, ISO
flat-face – connect-under-pressure
with case drain
Hydraulic circuit pedal lock
Auxiliary function lockout override
Loader lift lockout override
Heavy-duty hydraulic oil cooler
Loader arm float position
Loader function lockout system
Hydraulic one-way self-leveling
Ride control

LOADER

Manual attachment coupler
Radial lift geometry
Loader lift arm support strut
SAE operating load: 2,700 lbs
Tipping load: 5,400 lbs

TRACKS

HiQual S-Wave Tracks

OTHER STANDARD FEATURES

Halogen lights - 2 front, 2 side, 2 rear flood
Heavy duty front lights
Pre-wired for rotating beacon
Lockable service access hood
Single-point daily servicing
Rear tail lights
Remote oil drain
Remote oil and fuel filters
Block heater
Debris ingress sealing
Machine protection auto shutdown
Mounting points for add-on counterweights

OPTIONAL EQUIPMENT

OPERATOR ENVIRONMENT

Enclosed cab:
Fully sealed and pressurized – FSP
Glass door with wiper and washer
Sliding side windows – removable
Ventilation system with integrated heater
Heater and air conditioner
AM/FM radio with 2 speakers
Keyless start ignition

Electro-hydraulic controls:
For drive/steering, loader functions
Switchable between H and ISO patterns
Adjustable sensitivity of controls

Mechanical hand controls

Hand and foot controls:
Hand controls the loader drive function
and foot controls the bucket and boom

Non suspension seat
Deluxe cloth, air suspension seat, with heater
and lumbar support

Open cab interior trim package
Demolition cab door with polycarbonate
FOPS level 2
Heavy duty rear door

HYDRAULICS

High-flow auxiliary hydraulics – combined:
@ 3,050 psi (210 bar) – 33.2 gpm
(126 L/min)
Second auxiliary hydraulics

LOADER

Auxiliary front electric control
Hydraulic attachment coupler

OTHER

Language decals
Factory-installed tires – see page 3
Buckets – see page 3
Bolt-on bucket cutting edges
Bolt-on heavy-duty bucket spill guard
Special paint
Offsite service arrangement
Telematics

FACTORY SUPPLIED ATTACHMENTS

Interior mirror
Add-on counterweights
Road lights
Rotating beacon
Four-corner LED strobe
Bolt-on heavy-duty bucket teeth
48 in (1.22 m) pallet forks

SERVICE PARTS

3 inch (76.2 mm) retractable seat belt

CaseCE.com

©2016 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Capital is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Printed in U.S.A. Contains 10% post-consumer fiber.

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area.



CASE Construction Equipment is biodiesel-friendly. NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



Always read the Operator's Manual before operating any equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.

Form No. CCE201604TR270T3
Replaces Form No. CCE201511TR270T3

TR270

4 of 4