

**ENGINE**

Make	Deutz
Type	D2011 L2 Tier 4 Interim Certified
Rated horsepower	31 hp (23 kW)
Fuel consumption	0.8 gal/hr (3 L/hr)

**ELECTRICAL**

Voltage	12 volts
Batteries	1 x 12 volt
Battery reserve capacity	74 Ah/5 hour
Cold cranking amps	640 CCA

**STEERING**

Pump type	Gear
Cylinders	1
Steering angle (left & right)	33°
Oscillation angle	10°
Inner turning radius	97.6 in (2.48 m)
Relief pressure	2537 PSI (17.5 MPA)

**WEIGHT**

Operating weight	5,510 lbs (2500 kg)
Front drum weight	2,755 lbs (1250 kg)
Rear drum weight	2,755 lbs (1250 kg)
Front drum linear load	70 lb/in (12.5 kg/cm)
Rear drum linear load	70 lb/in (12.5 kg/cm)

**TRAVEL**

Drive	Hydrostatic
Variable displacement axial piston type drum drive pump	1
Hydraulic fixed displacement drum drive motors	2
Service brake	Hydrostatic
Parking/emergency brake	SAHR
Maximum relief pressure	5075 PSI (35 MPA)
Maximum working speed	4.7 mph (7.5 km/h)
Maximum travel speed	8.5 mph (13.6 km/h)
Gradeability (vibration off)	40° (20°)

**VIBRATION**

System design	Closed center
Pump type	Gear
Fixed displacement hydraulic motor	2
Maximum relief pressure	3480 PSI (24 MPA)
Vibration	Eccentric
Frequency –	
Low	3180 vpm (53 Hz)
High	3720 vpm (62 Hz)
Rated amplitude	0.0185 in (0.47 mm)
Centrifugal force –	
Low	4,580 lbs (20.8 kN)
High	6,277 lbs (28.5 kN)
Dynamic linear load –	
Low	116 lbs/in (0.02 kN/mm)
High	159 lbs/in (0.03 kN/mm)
Watering system	Pressurized
Front tank capacity	14 gal (53 L)
Rear tank capacity	39.6 gal (150 L)
Tank type	Polyethylene

**CAPACITIES**

Fuel tank	15.9 gal (60 L)
Engine oil	1.7 gal (6.5 L)
Hydraulic reservoir	10 gal (38 L)
Vibration system (each)	0.48 gal (1.8 L)

**OPERATORS COMPARTMENT**

Insulated from chassis by flexible shock absorbers, handrail, instrument panel anti-vandal guard, exceptional front/rear visibility, ROPS protection, single lever speed and direction control with vibration on/off control.

**MAXIMUM COMPACTED LIFT THICKNESS**


Sand/gravel	11.8 in (300 mm)
Mixed soils	7.9 in (200 mm)
Asphalt	4.7 in (120 mm)

**STANDARD EQUIPMENT**

- Fixed ROPS
- Anti-vandal guard
- Hydrostatic drive for both drums
- Dual vibration
- Front/dual drum vibration control
- Auto vibration stop in neutral
- Articulated chassis
- Hydraulic oil cooler
- Backup alarm
- 2 in (51 mm) retractable seat belt
- Fixed suspension seat with foldable arms
- Pressurized water system
- Machined tapered edge drums
- Vulcollon scrapers, adjustable
- 2-stage water filtration
- Master disconnect switch
- Horn
- Hourmeter
- Emergency stop button
- 4-point lift and tie down provision
- Watering system drains
- Electric fuse protection
- Steering wheel spinner knob
- Spin-on fuel, engine oil and hydraulic filters
- Tool box
- Flip open hood
- Indicator lights
  - Battery
  - Engine oil pressure
  - Intake preheater
  - Engine temperature
  - Parking brake
  - Vibration ON/OFF
  - Sprinkler system ON/OFF

**OPTIONAL EQUIPMENT**

- Rotating beacon
- Halogen work lights
- Foldable ROPS
- 3 in (76 mm) retractable seat belt
- Sunshade for fixed ROPS
- Brake release

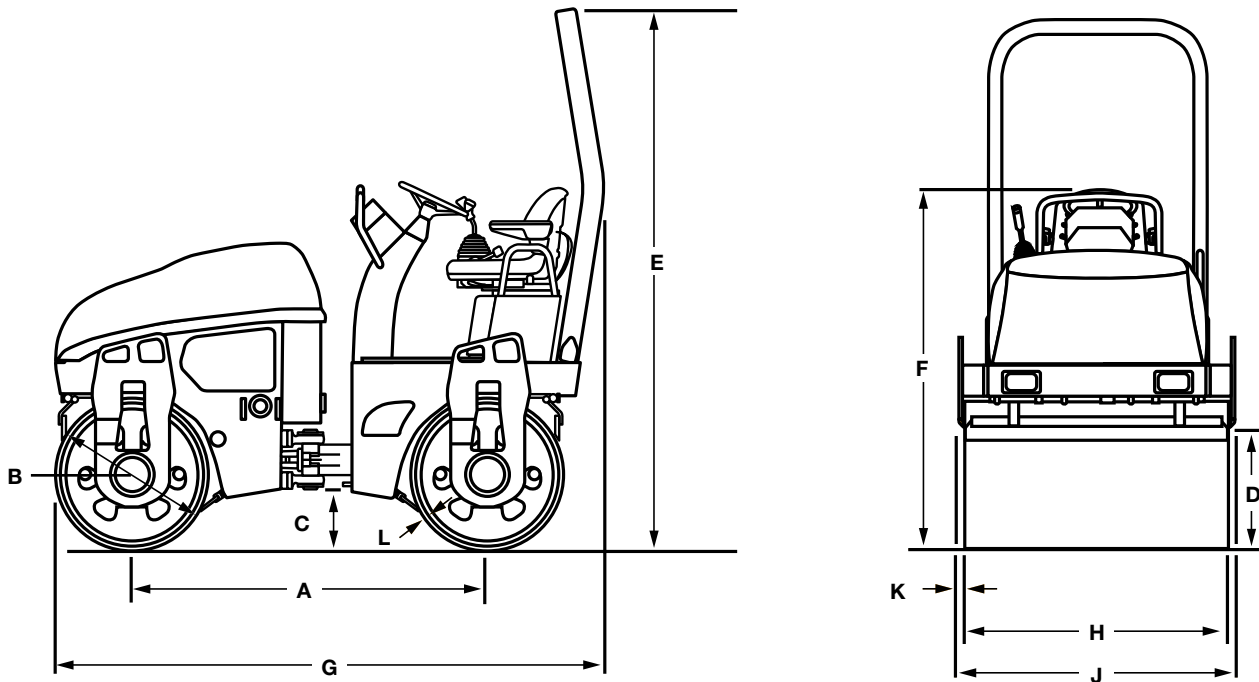

**DIMENSIONS**

A.	Wheelbase	67.6 in (1716 mm)
B.	Drum diameter	29 in (740 mm)
C.	Ground clearance	12 in (310 mm)
D.	Curb clearance	23 in (590 mm)
E.	Overall height	105 in (2680 mm)
F.	Folded ROPS height	72 in (1825 mm)
G.	Overall length	104 in (2640 mm)
H.	Drum width	39.4 in (1000 mm)
J.	Overall width	42.9 in (1090 mm)
K.	Frame extensions	1.8 in (45 mm)
L.	Drum thickness	0.5 in (12 mm)



NOTE: All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.

NOTE: All engines meet current EPA emissions requirements.

IMPORTANT: Case Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Case Construction Equipment Inc. does not warrant the safety or reliability of attachments from other manufacturers.

Case is a registered trademark of CNH America LLC. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH America LLC, are the property of those respective companies.



[www.casece.com](http://www.casece.com)