

ENGINE

Model	Isuzu AH-6HKIXYSS, Tier III certified
Type	4-stroke, turbocharged
Cylinders	6
Bore/Stroke	4.5 in x 4.9 in (115 x 125 mm)
Displacement	475 in ³ (7790 cc)
Fuel injection	Direct
Fuel injection pump	Electronic
Fuel	Diesel
Cooling	Liquid
Horsepower per SAE J1349	
Net	271 (202 kW) @ 2000 rpm
Maximum torque @ 1500 rpm	
Net	797 lb-ft (1080 N-m)

BOOM/ARM

Boom	
Length	21 ft 2 in (6.45 m)
Boom w/arm cylinder & plumbing	6,982 lb (3167 kg)
Hoist cylinders (2)	761 lb (345 kg) ea
Total weight	8,503 lb (3857 kg)
13 ft 3 in Arm (4.04 m)	
Length	13 ft 3 in (4.04 m)
Bare arm	3,150 lb (1429 kg)
Bucket cylinder linkage & plumbing	1,356 lb (615 kg)
Total weight	4,506 lb (2044 kg)
10 ft 8 in Arm (3.25 m)	
Length	10 ft 8 in (3.25 m)
Bare arm	2,414 lb (1095 kg)
Bucket cylinder linkage & plumbing	1,356 lb (615 kg)
Total weight	3,770 lb (1710 kg)
8 ft 8 in Arm (2.63 m)	
Length	8 ft 8 in (2.63 m)
Bare arm	2,275 lb (1032 kg)
Bucket cylinder linkage & plumbing	1,356 lb (615 kg)
Total weight	3,631 lb (1647 kg)

UNDERCARRIAGE

Number of rollers	
Top, each track	2
Bottom, each track	8
Number of shoes	
Triple grouser – each side	48
Link pitch	8.5 in (215.9 mm)

HYDRAULICS

Pumps (2)	Variable displacement axial piston design
Capacity –	
Maximum	2 x 76.6 gpm (290 L/min)
System relief pressure –	
Standard	4,975 psi (34.3 MPa)
Power Boost	5,410 psi (37.3 MPa)
Control valves –	
4-spool section for right track travel, boom, bucket and arm	
5-spool section for left track travel, boom, auxiliary, swing and arm	
Boom and arm anti-drift valves	
Pilot control hydraulic system –	
Pump (1)	Gear design
Maximum capacity	8.1 gpm (30.5 L/min)
Relief pressure	566 psi (3.9 MPa)
Swing –	
Motor (1)	Fixed displacement axial piston design
Speed	0-9.8 rpm
Swing torque	82,607 lb-ft (112 kN-m)
Brake	Spring-applied hydraulically released with dual cushion relief
Tail swing radius	11 ft 4 in (3.45 m)
Travel –	
Motor (1)	Two-speed axial piston design
Final drive	Planetary gear reduction
Drawbar pull	59,619 lb (265 kN)
Travel Speeds –	
Auto shift high to low	
	Forward/Reverse
Low	2.2 mph (3.5 km/h)
High	3.4 mph (5.5 km/h)
Travel control valve –	Dual stage relief and counter-balance design

HYDRAULIC CYLINDERS

Boom cylinders (2) –	
Bore diameter	5.7 in (145 mm)
Rod diameter	3.9 in (100 mm)
Stroke	58.9 in (1495 mm)
Arm cylinder (1) –	
Bore diameter	6.7 in (170 mm)
Rod diameter	4.7 in (120 mm)
Stroke	68.8 in (1748 mm)
Bucket cylinder (1) –	
Bore diameter	5.9 in (150 mm)
Rod diameter	4.1 in (105 mm)
Stroke	47.6 in (1210 mm)

ELECTRICAL

Voltage	24 volts, negative ground
Alternator	50 amp
Batteries (2)	Low-maintenance 128 Ah (5 hr rate)

SERVICE CAPACITIES

Hydraulic tank	
Refill capacity	46 gal (175 L)
Total system	92 gal (350 L)
Final drive (per side)	10.0 qt (9.5 L)
Swing drive	8.3 qt (7.9 L)
Engine	
w/filter change	40.2 qt (38.0 L)
Fuel	153 gal (580 L)
Radiator	31.7 qt (30 L)

OPERATING WEIGHT

With 10 ft 8 in (3.25 m) arm, 31.5 in (800 mm) track shoes, 2,544 lb (1156 kg) bucket, 165 lb (75 kg) operator, full fuel and standard equipment 79,065 lb (35 863 kg)

LIFT CAPACITIES

13 ft 3 in (4.04 m) Arm Lift capacities calculated using a 2,544 lb (1154 kg) bucket, 16,314 lb (7400 kg) counterweight.

Load (Lift Point) Height	10 ft (3.05 m)		15 ft (4.57 m)		20 ft (6.1 m)		25 ft (7.62 m)		30 ft (9.14 m)		35 ft (10.66 m)		MAXIMUM REACH			
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE	
+30 ft (9.14 m)													30 ft 0 in (9.1 m)	7,093 lbs* (3217 kg)*	7,093 lbs* (3217 kg)*	
+25 ft (7.62 m)													33 ft 6 in (10.2 m)	6,643 lbs* (3013 kg)*	6,643 lbs* (3013 kg)*	
+20 ft (6.1 m)													35 ft 9 in (10.8 m)	6,493 lbs* (2945 kg)*	6,493 lbs* (2945 kg)*	
+15 ft (4.57 m)								15,343 lbs* (6959 kg)*	14,943 lbs* (6778 kg)*	14,393 lbs* (6529 kg)*	10,672 lbs (4841 kg)		37 ft 2 in (11.3 m)	6,543 lbs* (2968 kg)*	6,543 lbs* (2968 kg)*	
+10 ft (3.05 m)					20,433 lbs* (9273 kg)*	20,143 lbs* (9137 kg)*	17,343 lbs* (7867 kg)*	14,222 lbs (6451 kg)	15,443 lbs* (7005 kg)*	10,222 lbs (4636 kg)		8,343 lbs* (3784 kg)*	7,522 lbs (3412 kg)	37 ft 9 in (11.5 m)	6,793 lbs* (3081 kg)*	6,522 lbs (2958 kg)
+5 ft (1.52 m)	31,393 lbs* (14,240 kg)*	31,393 lbs* (14,240 kg)*	34,493 lbs* (15,646 kg)*	29,822 lbs (13,527 kg)	24,193 lbs* (10,974 kg)*	19,072 lbs (8651 kg)	19,393 lbs* (8796 kg)*	13,322 lbs (6043 kg)	15,992 lbs (7222 kg)	9,772 lbs (4432 kg)	10,593 lbs* (4805 kg)*	7,272 lbs (3298 kg)	37 ft 7 in (11.4 m)	7,243 lbs* (3285 kg)*	6,372 lbs (2890 kg)	
Ground-line	26,393 lbs* (11,972 kg)*	26,393 lbs* (11,972 kg)*	39,343 lbs* (17,846 kg)*	27,572 lbs (12,506 kg)	27,443 lbs* (12,448 kg)*	17,822 lbs (8084 kg)	20,722 lbs (9399 kg)	12,572 lbs (5702 kg)	15,422 lbs (6995 kg)	9,322 lbs (4228 kg)	9,843 lbs* (4465 kg)*	7,072 lbs (3208 kg)	36 ft 8 in (11.1 m)	7,943 lbs* (3603 kg)*	6,572 lbs (2981 kg)	
-5 ft (-1.52 m)	32,093 lbs* (14,557 kg)*	32,093 lbs* (14,557 kg)*	40,293 lbs* (18,277 kg)*	26,522 lbs (12,030 kg)	28,872 lbs (13,096 kg)	17,022 lbs (7721 kg)	20,172 lbs (9150 kg)	12,072 lbs (5476 kg)	15,122 lbs (6859 kg)	9,022 lbs (4092 kg)			34 ft 11 in (10.6 m)	9,043 lbs* (4102 kg)*	7,122 lbs (3230 kg)	
-10 ft (-3.05 m)	39,993 lbs* (18,140 kg)*	39,993 lbs* (18,140 kg)*	39,993 lbs* (18,140 kg)*	26,422 lbs (11,985 kg)	28,572 lbs (12,960 kg)	16,722 lbs (7585 kg)	19,922 lbs (9036 kg)	11,872 lbs (5385 kg)	15,022 lbs (6814 kg)	8,922 lbs (4047 kg)			32 ft 1 in (9.7 m)	10,843 lbs* (4918 kg)*	8,522 lbs (3729 kg)	
-15 ft (-4.57 m)	52,343 lbs* (23,742 kg)*	52,343 lbs* (23,742 kg)*	36,343 lbs* (16,485 kg)*	26,822 lbs (12,166 kg)	26,843 lbs* (12,176 kg)*	16,872 lbs (7653 kg)	20,072 lbs (9104 kg)	11,972 lbs (5430 kg)					27 ft 11 in (8.5 m)	13,893 lbs* (6302 kg)*	10,572 lbs (4795 kg)	
-20 ft (6.1 m)	42,093 lbs* (19,093 kg)*	42,093 lbs* (19,093 kg)*	29,793 lbs* (13,514 kg)*	27,522 lbs (12,484 kg)	21,793 lbs* (9885 kg)*	17,472 lbs (7925 kg)										


10 ft 8 in (3.25 m) Arm Lift capacities calculated using a 2,544 lb (1154 kg) bucket, 16,314 lb (7400 kg) counterweight.

Load (Lift Point) Height	10 ft (3.05 m)		15 ft (4.57 m)		20 ft (6.1 m)		25 ft (7.62 m)		30 ft (9.14 m)		35 ft (10.66 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+30 ft (9.14 m)													26 ft 9 in (8.1 m)	9,279 lbs* (4209 kg)*	9,279 lbs* (4209 kg)*
+25 ft (7.62 m)													30 ft 8 in (9.3 m)	8,679 lbs* (3937 kg)*	8,679 lbs* (3937 kg)*
+20 ft (6.1 m)							16,179 lbs* (7339 kg)*	15,375 lbs (6974 kg)					33 ft 3 in (10.1 m)	8,479 lbs* (3846 kg)*	8,479 lbs* (3846 kg)*
+15 ft (4.57 m)					19,729 lbs* (8949 kg)*	19,729 lbs* (8949 kg)*	17,479 lbs* (7928 kg)*	14,875 lbs (6747 kg)	15,979 lbs* (7248 kg)*	10,675 lbs (4842 kg)			34 ft 9 in (10.5 m)	8,529 lbs* (3869 kg)*	8,125 lbs (3685 kg)
+10 ft (3.05 m)	48,829 lbs* (22,148 kg)*	48,829 lbs* (22,148 kg)*	31,329 lbs* (14,210 kg)*	31,329 lbs* (14,210 kg)*	23,179 lbs* (10,514 kg)*	20,275 lbs (9196 kg)	19,329 lbs* (8767 kg)*	14,125 lbs (6407 kg)	16,475 lbs (7473 kg)	10,325 lbs (4683 kg)			35 ft 5 in (10.8 m)	8,829 lbs* (4005 kg)*	7,625 lbs (3459 kg)
+5 ft (1.52 m)	18,979 lbs* (8609 kg)*	18,979 lbs* (8609 kg)*	38,829 lbs* (17,612 kg)*	29,125 lbs (13,211 kg)	26,729 lbs* (12,124 kg)*	18,925 lbs (8584 kg)	21,129 lbs* (9584 kg)*	13,425 lbs (6089 kg)	16,075 lbs (7291 kg)	9,925 lbs (4502 kg)			35 ft 3 in (10.7 m)	9,429 lbs* (4277 kg)*	7,525 lbs (3413 kg)
Ground-line	25,129 lbs* (11,398 kg)*	25,129 lbs* (11,398 kg)*	41,029 lbs* (18,610 kg)*	27,575 lbs (12,508 kg)	29,129 lbs* (13,213 kg)*	17,925 lbs (8131 kg)	20,925 lbs (9491 kg)	12,825 lbs (5817 kg)	15,725 lbs (7133 kg)	9,625 lbs (4366 kg)			34 ft 2 in (10.4 m)	10,329 lbs* (4685 kg)*	7,775 lbs (3527 kg)
-5 ft (-1.52 m)	32,429 lbs* (14,709 kg)*	32,429 lbs* (14,709 kg)*	40,779 lbs* (18,497 kg)*	27,175 lbs (12,326 kg)	29,225 lbs (13,256 kg)	17,425 lbs (7904 kg)	20,525 lbs (9310 kg)	12,475 lbs (5658 kg)	15,525 lbs (7042 kg)	9,425 lbs (4275 kg)			32 ft 3 in (9.82 m)	11,779 lbs* (5343 kg)*	8,575 lbs (3889 kg)
-10 ft (-3.05 m)	45,579 lbs* (20,674 kg)*	45,579 lbs* (20,674 kg)*	38,779 lbs* (17,590 kg)*	27,375 lbs (12,417 kg)	28,729 lbs* (13,031 kg)*	17,375 lbs (7881 kg)	20,475 lbs (9287 kg)	12,375 lbs (5613 kg)					29 ft 2 in (8.8 m)	14,279 lbs* (6477 kg)*	10,175 lbs (4615 kg)
-15 ft (-4.57 m)	47,629 lbs* (21,604 kg)*	47,629 lbs* (21,604 kg)*	34,079 lbs* (15,458 kg)*	27,875 lbs (12,644 kg)	25,429 lbs* (11,534 kg)*	17,675 lbs (8017 kg)	18,529 lbs* (8404 kg)*	12,725 lbs (5772 kg)					24 ft 5 in (7.4 m)	13,829 lbs* (6273 kg)*	13,825 lbs (6271 kg)
-20 ft (6.1 m)	33,779 lbs* (15,322 kg)*	33,779 lbs* (15,322 kg)*	24,829 lbs* (11,262 kg)*	24,829 lbs* (11,262 kg)*	16,929 lbs* (7679 kg)*	16,929 lbs* (7679 kg)*									

8 ft 8 in (2.63 m) Arm Lift capacities calculated using a 2,544 lb (1154 kg) bucket, 16,314 lb (7400 kg) counterweight.

Load (Lift Point) Height	10 ft (3.05 m)		15 ft (4.57 m)		20 ft (6.1 m)		25 ft (7.62 m)		30 ft (9.14 m)		MAXIMUM REACH		
	END	SIDE	END	SIDE	END	SIDE	END	SIDE	END	SIDE	@	END	SIDE
+20 ft (6.1 m)							18,034 lbs* (8180 kg)*	14,737 lbs (6684 kg)			27 ft 0 in (8.2 m)	14,722 lbs* (6678 kg)*	12,765 lbs* (5790 kg)*
+15 ft (4.57 m)					21,926 lbs* (9945 kg)	20,477 lbs (9288 kg)	19,121 lbs* (8673 kg)	14,218 lbs (6449 kg)			29 ft 0 in (8.8 m)	15,004 lbs* (6806 kg)	10,975 lbs (4978 kg)
+10 ft (3.05 m)			34,249 lbs* (15,535 kg)	29,418 lbs (13,344 kg)	25,145 lbs* (11,405 kg)	19,112 lbs (8669 kg)	20,707 lbs* (9392 kg)	13,535 lbs (6139 kg)			29 ft 11 in (9.1 m)	15,852 lbs* (7190 kg)	10,029 lbs (4549 kg)
+5 ft (1.52 m)			39,237 lbs* (17,797 kg)	27,188 lbs (12,332 kg)	27,960 lbs* (12,682 kg)	19,233 lbs (8130 kg)	20,891 lbs (9476 kg)	12,888 lbs (5846 kg)	15,717 lbs (7129 kg)	9,701 lbs (4400 kg)	30 ft 1 in (9.17 m)	15,655 lbs (7101 kg)	9,662 lbs (4382 kg)
Ground-line			40,716 lbs* (18,468 kg)	26,240 lbs (11,902 kg)	28,808 lbs* (13,067 kg)	17,168 lbs (7787 kg)	20,380 lbs (9244 kg)	12,428 lbs (5637 kg)			29 ft 4 in (8.9 m)	16,018 lbs (7266 kg)	9,819 lbs (4454 kg)
-5 ft (-1.52 m)	36,164 lbs* (16,404 kg)	36,164 lbs* (16,404 kg)	39,480 lbs* (17,908 kg)	26,076 lbs (11,828 kg)	28,472 lbs (12,915 kg)	16,876 lbs (7655 kg)	20,176 lbs (9152 kg)	12,244 lbs (5554 kg)			27 ft 8 in (8.4 m)	17,377 lbs (7882 kg)	10,616 lbs (4815 kg)
-10 ft (-3.05 m)	48,416 lbs* (21,961 kg)	48,416 lbs* (21,961 kg)	35,859 lbs* (16,265 kg)	26,408 lbs (11,978 kg)	27,142 lbs* (12,311 kg)	17,010 lbs (7715 kg)					24 ft 11 in (7.6 m)	20,462 lbs (9281 kg)	12,480 lbs (5661 kg)
-15 ft (-4.57 m)	37,846 lbs* (17,167 kg)	37,846 lbs* (17,167 kg)	28,901 lbs* (13,109 kg)	27,265 lbs (12,367 kg)	21,330 lbs* (9675 kg)	17,690 lbs (8024 kg)					20 ft 8 in (6.3 m)	20,311 lbs* (9213 kg)	16,939 lbs (7683 kg)


*Lift capacities do not exceed 75% of the minimum tipping load or 87% of the hydraulic lift capacity. Capacities that are marked with an asterisk are hydraulic limited.

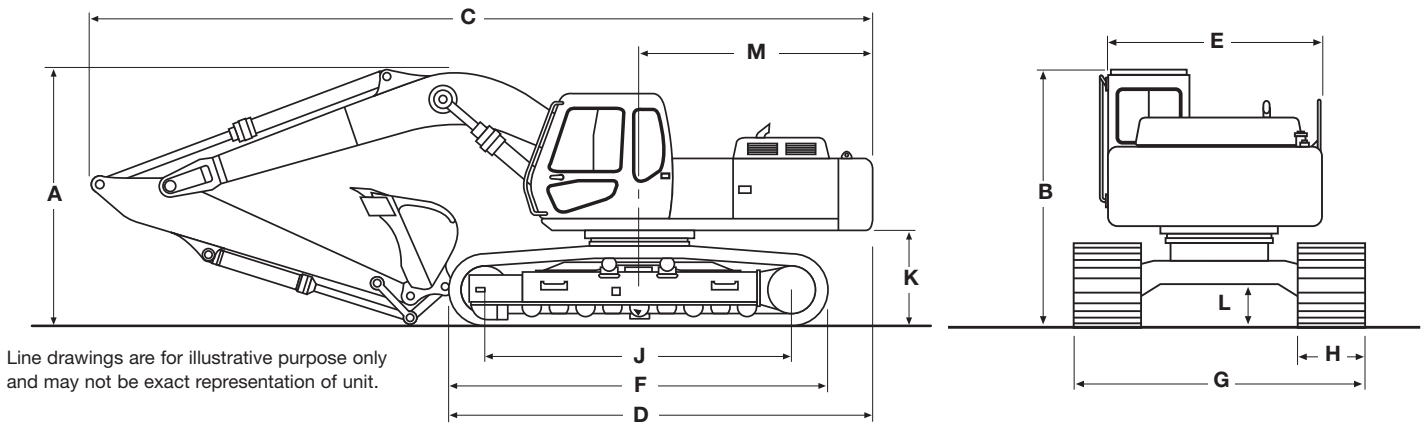

DIMENSIONS

	13 ft 3 in (4.04 m) Arm	10 ft 8 in (3.25 m) Arm	8 ft 8 in (2.63 m) Arm
A. Overall height	11 ft 5 in (3.48 m)	10 ft 8 in (3.26 m)	11 ft 6 in (3.50 m)
B. Cab height	10 ft 6 in (3.19 m)	10 ft 6 in (3.19 m)	10 ft 6 in (3.19 m)
C. Overall length	36 ft 5 in (11.09 m)	36 ft 3 in (11.05 m)	36 ft 6 in (11.13 m)
D. w/o attachment	19 ft 5 in (5.91 m)	19 ft 5 in (5.91 m)	19 ft 5 in (5.91 m)
E. Width of upperstructure	9 ft 11 in (3.02 m)	9 ft 11 in (3.02 m)	9 ft 11 in (3.02 m)
E. Width of upperstructure w/catwalks	11 ft 9 in (3.58 m)	11 ft 9 in (3.58 m)	11 ft 9 in (3.58 m)
F. Track overall length	16 ft 4 in (4.98 m)	16 ft 4 in (4.98 m)	16 ft 4 in (4.98 m)
G. Track overall width w/31.5 in (800 mm) shoes	11 ft 2 in (3.40 m)	11 ft 2 in (3.40 m)	11 ft 2 in (3.40 m)
H. Track shoe width	31.5 in (800 mm)	31.5 in (800 mm)	31.5 in (800 mm)
J. Center to center (idler to sprocket)	13 ft 3 in (4.04 m)	13 ft 3 in (4.04 m)	13 ft 3 in (4.04 m)
K. Upperstructure ground clearance	4 ft 0 in (1.21 m)	4 ft 0 in (1.21 m)	4 ft 0 in (1.21 m)
L. Minimum ground clearance	1 ft 7 in (0.48 m)	1 ft 7 in (0.48 m)	1 ft 7 in (0.48 m)
M. Tail swing radius	11 ft 4 in (3.45 m)	11 ft 4 in (3.45 m)	11 ft 4 in (3.45 m)
Working weight*	79,801 lb (36 197 kg)	79,065 lb (35 863 kg)	78,926 lb (35 800 kg)
Ground pressure	7.5 psi (52 kPa)	7.4 psi (51 kPa)	7.4 psi (51 kPa)

*With 31.5 in (800 mm) track shoe, 2,544 lb (1154 kg) bucket, 165 lb (75 kg) operator, full fuel and standard equipment.

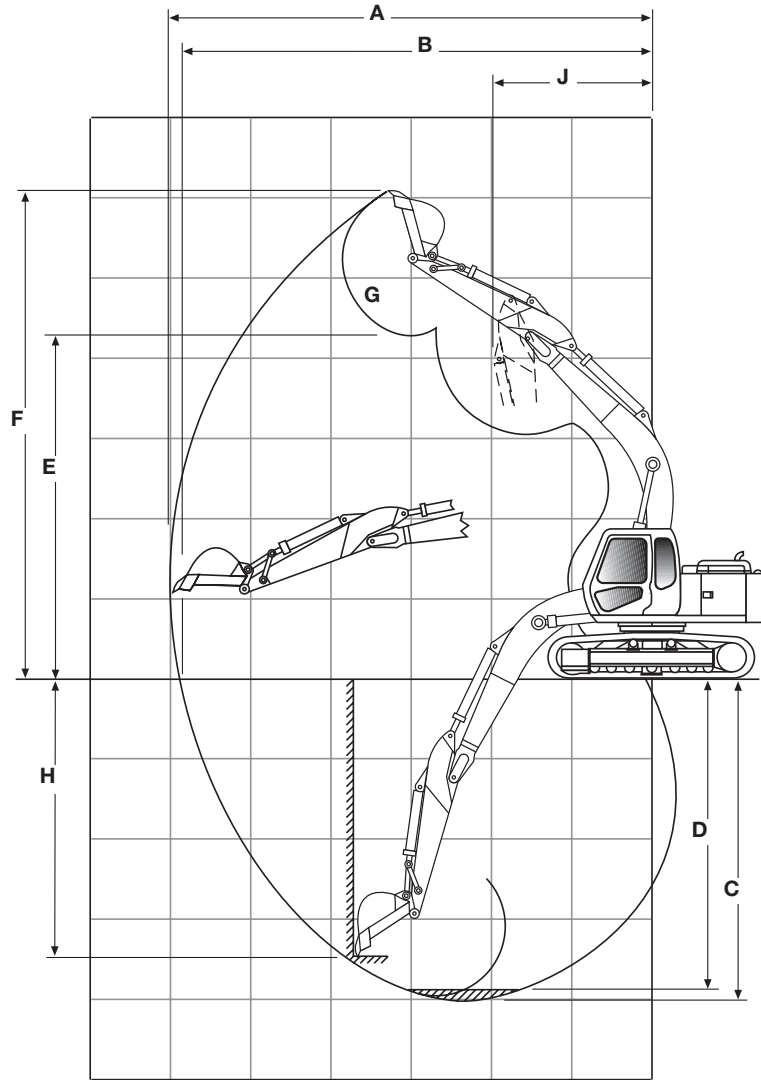

PERFORMANCE SPECS

	13 ft 3 in (4.04 m) Arm	10 ft 8 in (3.25 m) Arm	8 ft 8 in (2.63 m) Arm
A. Maximum dig radius	39 ft 1 in (11.9 m)	36 ft 8 in (11.17 m)	35 ft 0 in (10.67 m)
B. Dig radius at groundline	38 ft 5 in (11.72 m)	36 ft 0 in (10.98 m)	34 ft 4 in (10.47 m)
C. Maximum dig depth	26 ft 8 in (8.14 m)	24 ft 1 in (7.34 m)	22 ft 1 in (6.73 m)
D. Dig depth - 8 ft 0 in (2.44 m) level bottom	26 ft 3 in (8.01 m)	23 ft 7 in (7.19 m)	21 ft 6 in (6.55 m)
E. Dump height	24 ft 9 in (7.54 m)	23 ft 9 in (7.23 m)	23 ft 5 in (7.14 m)
F. Overall reach height	35 ft 0 in (10.67 m)	34 ft 0 in (10.37 m)	33 ft 10 in (10.32 m)
G. Bucket rotation	173°	173°	173°
H. Vertical straight wall dig depth	23 ft 5 in (7.15 m)	20 ft 10 in (6.35 m)	19 ft 7 in (5.97 m)
J. Minimum swing radius	15 ft 0 in (4.56 m)	14 ft 9 in (4.50 m)	15 ft 2 in (4.63 m)
Arm digging force			
Standard	31,586 lb (140.5 kN)	36,846 lb (163.9 kN)	43,838 lb (195.0 kN)
Power Boost	34,306 lb (152.6 kN)	40,016 lb (178.0 kN)	47,435 lb (211.0 kN)
Bucket digging force			
Standard	51,436 lb (228.8 kN)	51,436 lb (228.8 kN)	51,436 lb (228.8 kN)
Power Boost	55,843 lb (248.4 kN)	55,843 lb (248.4 kN)	55,843 lb (248.4 kN)

STANDARD EQUIPMENT

OPERATOR'S COMPARTMENT

Sliding front window – storable
 LCD monitor display
 Skylight
 Cab with Isomount® system
 Adjustable deluxe seat with
 3 in (76 mm) retractable seat belt
 Safety glass – all windows
 Climate Control System
 AM/FM Radio w/auto tuner
 Windshield wiper w/washer
 Anti-theft device
 Dome light
 Single pedal track

ENGINE

Isuzu AH-6HKIXYSS turbocharged diesel
 Tier III certified
 Warm up mode
 Selectable one touch or auto
 accelerator/decelerator
 Dial type throttle control
 Emergency stop
 Auto engine derate

OPTIONAL EQUIPMENT

UPPERSTRUCTURE

Arm: 13 ft 3 in, 10 ft 8 in or 8 ft 8 in
 (4.04 m, 3.25 m or 2.63 m)
 FOPS guard level 2
 Front screen 2 in x 2 in
 Front guard vertical bars
 Sun visor
 Rain deflector
 See through skylight

BUCKETS

Application	Width	SAE Heaped Capacity
General purpose	30 in to 60 in (0.76 to 1.52 m)	1.26 yd ³ to 2.93 yd ³ (0.96 m ³ to 2.24 m ³)
Heavy-duty	30 in to 54 in (0.76 to 1.37 m)	1.22 yd ³ to 2.53 yd ³ (0.93 m ³ to 1.93 m ³)
Extreme-duty	30 in to 48 in (0.76 to 1.22 m)	1.12 yd ³ to 2.04 yd ³ (0.86 m ³ to 1.56 m ³)
Ditching	72 in (1.83 m)	2.20 yd ³ (1.68 m ³)

ELECTRICAL

Batteries (2)
 Electronic Systems Monitor
 Boom worklight
 Turntable worklight

HYDRAULICS

ISO pattern pilot controls
 Work mode selector: SP, H & Auto
 Auto Power Boost
 2 Variable flow piston pumps
 Auxiliary attachment mode
 Neutral pump destroke
 Auxiliary hydraulic valve
 Boom and arm anti-drift valves
 Attachment cushion control for boom and arm
 100% return oil filtration

UNDERCARRIAGE

Shoes: 31.5 in (800 mm) 3-bar, 48 per side
 Track length: 16 ft 4 in (4.98 m)
 Track gauge: 8 ft 6 in (2.59 m)
 Sealed and lubed track

TRACK DRIVE

2-speed hydrostatic travel
 Straight tracking travel priority
 Disc-type parking brakes

UPPERSTRUCTURE

Boom: 21 ft 2 in (6.45 m) one piece
 Hammer adaptable
 Swing brake

OTHER

Counterweight: 16,314 lb (7400 kg)
 Single key lockup

HYDRAULICS

Auxiliary hydraulics
 Single acting, one pump
 Double acting, single or dual pump (includes
 heavy-duty bucket linkage)
 Double acting general purpose
 for use with thumb kit
 Control pattern selector valve

OTHER

Load holding control devices
 Cylinder mounted
 Esco hydraulic coupler

This page intentionally left blank.

NOTE: All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.

NOTE: All engines meet current EPA emissions requirements.

IMPORTANT: Case Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Case Construction Equipment Inc. does not warrant the safety or reliability of attachments from other manufacturers.

Case is a registered trademark of CNH America LLC. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH America LLC, are the property of those respective companies.



www.casece.com