



1835 Hydrostatic Uni-Loader[®]




Case 1835 Uni-Loader:

Hydrostatic drive for smooth control, Case power for reliability, fuel efficiency



Power-in-Hand Command

Two levers provide full control of power, speed, direction and all loader functions. Simplicity minimizes operator learning time, helps improve cycling efficiency.

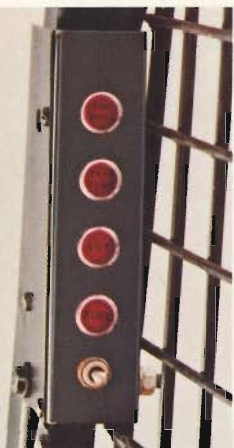


Operator Warning Lights

Indicate condition of the charge filter; high transmission oil temperature; low charge pump pressure and low fuel level. Check switch allows operator to determine if warning lights are functioning properly.



1200-lb (544 kg) Load Rating

and series type hydraulic circuit enables operator to raise and dump at the same time to speed up cycle time.

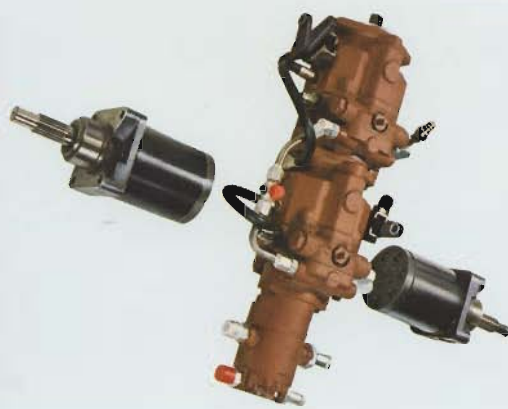

Hydrostatic Drive

Delivers smooth, constant power with infinitely variable speed to 6.1 mph (9.8 km/h). Makes it easy to match power and speed to job needs. Gradual, pivot and counter-rotation turns are accomplished by degree and direction each control lever is moved from neutral.



Case-Built Water-Cooled Engines

Choice of 32 hp (23.9 kW) gasoline or 34 hp (25.4 kW) diesel. Replaceable wet sleeves. Dependable, fuel-efficient power proven by many years of job performance.




Swing-Open Door
and lift-off seat provide easy service access for routine maintenance.



Standard ROPS Canopy, Seat Belt

Roomy compartment, adjustable seat and engine heat shield combine to provide comfort and protection for operator. Overall height only 80³/₄" (2.0 m) — easily clears 7' (2.1 m) doorways. Parking latch with positive pin lock standard.

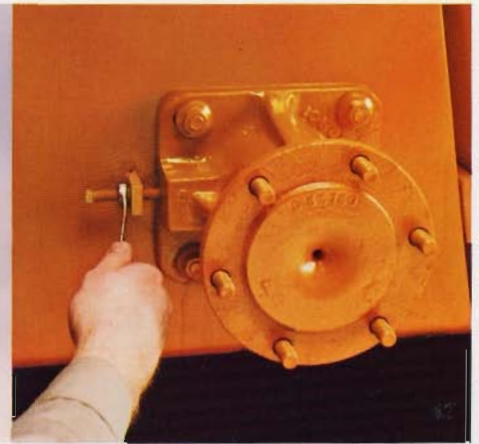


Externally Adjusted Chains
and inspection covers allow quick checks of chain tension and simple sliding-sprocket adjustments when necessary.



Three Separate Oil Reservoirs

Independent reservoir for hydraulic and hydrostatic systems (1) eliminates risk of contaminants being introduced from final drives. Separate reservoirs (2) provide oil bath cleaning and lubricating of drive chains on each side of unit. Hydraulic and drive systems both protected by dual filtration with replaceable elements.

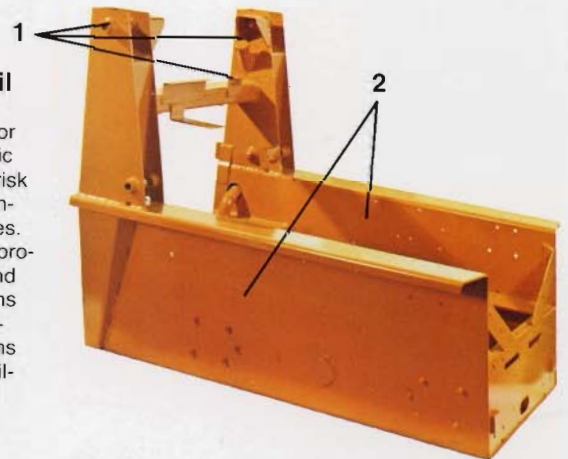

3100-lb (1406 kg) Breakout Force

Tilt cylinders provide plenty of hydraulic power for prying out tough materials, filling bucket quickly and easily.



Easy Truck Loading

Combine the 9' 2" (2.8m) hinge pin lift height with fast cycling for fast, efficient truck and bin loading.



Case 1835 Uni-Loader — the skid-steer loader with:

- Hydrostatic drive
- Case water-cooled engine — 32 hp (23.9 kW) gasoline or 34 hp (25.4 kW) diesel
- 4323 lbs (1961 kg) operating weight for gasoline model, 4526 lbs (2053 kg) for diesel
- 54" (1.4 m) width
- 1200-lb (544 kg) load rating
- ROPS, parking latch and operator warning lights standard

A quality product of a major company that manufactures a complete line of construction, utility and agricultural equipment. Sold and serviced by Case dealers nationwide.

Case offers you a wide range of four-wheel-drive Uni-Loader models and optional equipment. See your nearest Case dealer.

IMPORTANT: JI Case Company reserves the right to change design, materials and/or specifications without notice and without incurring any obligations relating to such changes.



JI Case

A Tenneco Company
700 State Street Racine, WI 53404 U.S.A.

