



Model		NH-5620 TX 2WD	NH-5620 TX 4WD
Engine	Engine Model	S8000	
	Engine Type	4 Stroke Direct Injection	
	Engine Power	48.47 kW (65HP)	
	Rated RPM	2300	
Air Cleaner	Air Cleaner	8 Inch (0.20 m) Duel Element, Dry Type	
Transmission	Clutch	Double Clutch With Independent PTO Clutch Lever	
	Gear Box	12+3 UG / 12+3 Creeper*	
Brakes		Real Oil Immersed Brake	
Hydraulics		2000 Kg Lifting Capacity with Assist Ram	
Steering		Power Steering	
PTO		540 & Reverse PTO	
Tyre	Front	7.50 * 16 inch (0.19 m * 0.41 m)	11.2 * 24 inch (0.28 m * 0.61 m)
	Rear	16.9 * 30 inch (0.43 m * 0.76 m)	16.9 * 30 inch (0.43 m * 0.76 m)
Rear Axle		Heavy Duty Hub Reduction With Powerful Traction	
Electricals		88/100* Ah Battery & 55 Amp Alternator	
Dimention	Length	3.5 m (3515 mm)	3.54 m (3540 mm)
	Width	1.96 m (1965 mm)	1.99 m (1985 mm)
	Height	2.37 m (2375 mm)	2.42 m (2420 mm)
	Wheel Base	2.05 m (2050 mm)	2.04 m (2040 mm)
	Ground Clearance	0.495 m (495 mm)	0.44 m (440 mm)
	Weight	2355 Kg	2490 Kg

- ✓ Heavy Duty 12+3 UG Gearbox (Partial Syncromesh)
- ✓ Independent PTO Clutch Lever
- ✓ Adjustable Front Axle
- ✓ Comfortable Seat With Arm Rest
- ✓ Bigger & Comfortable Platform
- ✓ Front Weight Carrier - 55 Kg
- ✓ Neutral Safety Switch
- ✓ Clutch Safety Lock
- ✓ Transmission Cover



Dear Farmer Brothers,

The new 65 HP (48.47 Kw) 5620 Tx plus comes with
the magnificent legacy of The popular 5630 Tx plus
5620 Tx Plus- Naam Hi Kaafi Hai!

*Optional

CNH INDUSTRIAL (INDIA) PRIVATE LIMITED

Plot No. 03, Udyog Kendra, Greater Noida, District Gautam Budh Nagar,
Uttar Pradesh - 201 306

Note: Note: Since product information is a continuous process, specifications and details may change without any prior information. The accessories / tools shown here are not parts of the original device and New Holland does not promote or take responsibility of the tools not manufactured by the company.

TRACTOR RANGE
35-90 HP

Toll Free No.:
1800-419-0124
www.newholland.com/in

Authorized Dealer



POWER OF 65 HP
48.47 kW



NEW



NAAM HI KAAFI HAI!



4WD
Available in 4WD



65HP (48.47 kW)
Powerful & fuel
efficient engine



Upto 5 HP more
PTO power



Rops & Canopy
ensure Driver's
complete safety



New Holland
SKY WATCH
Easy to track
& trace the tractor

*Applicable from 2nd October 2020, Terms & Conditions apply



POWER OF 65 HP




Now witness yourself
WHO IS MORE POWERFUL...




JOHN DEERE

5405

PTO Power
53 HP (39.52 kW)

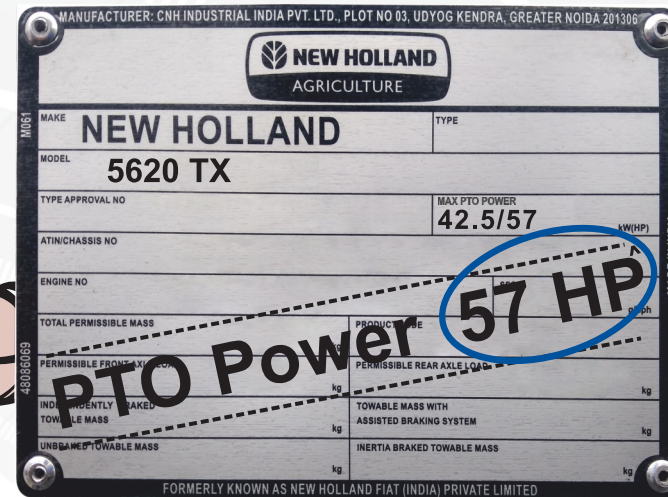

NEW HOLLAND 5620 TX Plus+
42.5 kW (57 HP) PTO Power



SWARAJ

963

PTO Power
52 HP (38.78 kW)

**New Holland
SKY WATCH™**

- Track & Trace
- Machine Safety
- Proactive Alerts - Max Productivity, Min Downtime
- Performance Enhancement
- Live Dashboard

**This Tractor
Speaks**



GLOBAL LEGEND IN ENGINE TECHNOLOGY

power with generation FPT engine that provides outstanding performance through its power & torque characteristics and gives better fuel efficiency



> Sky Watch

- It now becomes easy to track and trace your tractor
- Pro-active alerts - More work & less tractor repairs

> Company Fitted ROPS & Canopy

- Complete safety for the driver

> Creeper Speed Gear Box*

- Easy to work with implements like seeder, mulcher etc. with slow speed high torque gear box

> Best Sensomatic²⁴ Hydraulic Lift

- The 24 sensing points offers improved sensing in every soil, leading to saving in fuel

> Lift-o-Matic With Automatic Height Limiter

- With Lift-o-matic and height limiter, you achieve uniform depth in tilling and sowing, leading to more productivity and saving on time, that means doubling the benefit

> Additional PTO Shaft

- Additional PTO shaft for external hydraulic pump which ensures the tractor always on-road
- Helpful in the Loader Application

> Bigger 8 inch (0.20 m) Air Cleaner

- More engine durability
- More capacity to clean air, which reduces the cleaning of pre cleaner again and again

> High Ground Clearance

- Crosses bumpy rough grounds easily
- Now the tractor looks more powerful and strong

NEW HOLLAND 5620	JOHN DEERE 5405	SWARAJ 963
✓	✗	✗
✓	✗	✗
✓	✗	✗
✓	✗	✗
✓	✗	✗
✓	✗	✗
✓	✗	✗
✓	✗	✗
0.495 m (495 mm)	0.425 m (425 mm)	0.425 m (425 mm)

*Optional