

Model		NH 5510 2WD	NH 5510 4WD
Engine	Type	FPT S8000, Naturally Aspirated	
	Engine Power	36.9kW (49.5 HP)	
	Displacement	2931 CC	
	No. of Cylinders	3	
	Rated Engine Speed	2100	
Fuel System	Air Cleaner	7 inch (0.178 m) dry type with dual element	
	Fuel Injection Pump	Inline Type	
Transmission	Fuel Tank Capacity	60 L / 100 L*	
	Clutch	Double Clutch with Independent PTO Lever	
	Gearbox	12F + 12R / 20F + 20R* / 24F + 24R*	
Hydraulics	Gearbox Type	Fully Synchromesh with Mechanical Shuttle / Power Shuttle*	
	Lift Capacity	2000 kg / 2500 kg with Assist Ram*	
Brakes	Remote Valve	1 Remote Valve (2 Ports), 2 Remote Valve (4 Ports)*, 3 Remote Valve (6 Ports)*	
	Type	Mechanically Actuated Oil Immersed Multi Disc Brakes / Hydraulically Actuated Oil Immersed Multi Disc Brakes*	
PTO	Type	Independent, 6 Splines	
	RPM	540 @ 2198 ERPM, 540E @ 1715 ERPM & RPTO / GSPTO*	
Types	Front	7.50x16 inch (0.19m x 0.41m)	9.50x24 inch (0.24m x 0.61m)
	Rear	16.9x28 inch (0.43m x 0.71m)	16.9x28 inch (0.43m x 0.71m)
Weight & Dimensions	Total Weight	2330 kg	2540 kg
	Wheel base	2075 mm (2.075 m)	2015 mm (2.015 m)
	Overall Length	3875 mm (3.875 m)	3875 mm (3.875 m)
	Overall Width	1965 mm (1.965 m)	1965 mm (1.965 m)
	Ground Clearance	410 mm (0.41 m)	365 mm (0.365 m)
Additional Features	• NH Cat Eye Styling		
	• Super Deluxe Seat		
	• Telescopic Stabilizer Bar*		
	• Sky Watch*		
		• Flat Deck Platform	• Floor Mat
		• Clutch Safety Lock	• Neutral Safety Switch
		• Front Bumper*	• ROPS & Canopy*
		• Hydraulic Pump 45 & 51 L/min.	• Anti Glare Rear View Mirror

L = Litre, 1 inch = 0.0254 m *Optional

Multi-Application Specialist



PNEUMATIC PLANTER



POTATO PLANTER



TOT COMBINE HARVESTER



HEAVY HAULAGE



REVERSIBLE MB PLOUGH



FRONT LOADER



POWER HARROW



STRAW REAPER

CNH INDUSTRIAL (INDIA) PRIVATE LIMITED

Plot No. 03, Udyog Kendra, Greater Noida, District Gautam Budh Nagar,
Uttar Pradesh - 201 306

Note: Note: Since product information is a continuous process, specifications and details may change without any prior information. The accessories / tools shown here are not parts of the original device and New Holland does not promote or take responsibility of the tools not manufactured by the company.
Registered Trademark of New Holland 3600™ CNH Industrial (India) Private Limited.

Tractor Range

35-90 HP



Toll Free No.:

1800-419-0124

www.newholland.com/in

Authorized Dealer

1 HP=745.699 W

Leaflet/English/September/2020

NEW HOLLAND
AGRICULTURE

IS JAISA KOI NAHIN!



NEW
EXCEL
ULTIMA

5510

With

EVT
drive

FPT
POWERTRAIN TECHNOLOGIES
Engine


International Excel Styling

The excel styling is known for its premium & stylish looks, easy serviceability and comfort. If you want your tractor to stand out in the field, then Excel styling is your answer.



Powerfully Efficient

Powered by 3 Cylinder FPT engine known for best in class torque & fuel efficiency



EVT Drive Transmission

The dedicated Synchro Shuttle™ / Power shuttle* with 12F+12R / 20F+20R Creeper* / 24F+24R Splitter* gear speeds allows to perform varied applications with effortless forward & reverse movements.




Flat Deck Operator Platform

Bigger & Clean operator platform brings you superior seating comfort & more space which allows to work non-stop.



Heavy Duty Chassis

The robust heavy duty structure made for heavy duty applications like loader, TOT combine harvester etc.

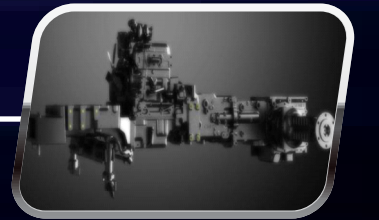

THE ULTIMATE BLEND OF POWER, STYLE & TECHNOLOGY

Excel Ultima 5510 is designed to offer the most comfortable and convenient driving experience, blend with international excel styling & ultimate features that will bring a pride in you. It is the first tractor in the market to offer the maximum features in its category. So, no matter which implement you want to use, your tractor will always be there.

Boost Your Productivity with Maximum Capacity

100 litre (60L+40L) of diesel tank capacity keeps you tension free from refilling, saves time & increases productivity.




PTO Speeds to Suit any Requirement

With the help of Standard 540, 540 Economy & Reverse PTO, operate any type of PTO implement with ease & precision



Superior Braking Performance

Mechanically Actuated OIB / Hydraulically Actuated OIB* brakes minimize stopping distance which brings superior safety & control.

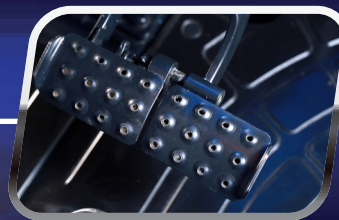

Hydraulic Power you Need Always Available

2000 kg Standard / 2500 kg with Assist Ram* Lifting Capacity enables you to use large & heavy implements very easily.



Ultimate in Farming Safety

Company fitted ROPS & Canopy gives complete safety to operator & protects from sun & rain.

