



NEW HOLLAND CR

CR7.90 | CR9.80



THE WORLD'S HIGHEST CAPACITY COMBINE. FACT. ENTER A NEW HARVESTING DIMENSION.

New Holland revolutionized the way farmers harvested over 40 years ago with the introduction of ground-breaking Twin Rotor™ technology for combines. Today's latest generation of CR combines continues the pure rotary bloodline and offers the world's farmers world-beating grain and straw quality thanks to the gentle multi-pass action. The new range is the most powerful and productive CR to date. The all-new Harvest Suite™ Ultra cab has set a new benchmark in terms of harvesting ergonomics and comfort. Innovative features such as the SmartTrax™, IntelliCruise™, IntelliSteer® and Opti-Spread™ systems further enhance productivity, and together with Dynamic Feed Roll™ technology, continue to ensure that the CR range is one of the most advanced and productive harvesters in the world.



Four chain feeding system



OUTSTANDING CAPACITY

The range delivers efficient power and when combined with advanced harvesting technology, including IntelliSteer® auto guidance, you can harvest around the clock. Twin Pitch rotor technology can improve capacity in high moisture conditions by up to 10%. The optional Dynamic Feed Roll, with integrated dynamic stone protection, has improved already impressive capacity by up to 10% as well as enhancing crop flow into the rotors and reducing grain clogging. The CR, keeps going as long as you do.




SUPERIOR HARVEST QUALITY

Unsurpassed grain and straw quality is guaranteed courtesy of gentle, yet highly efficient Twin Rotor™ technology. Grain cracking is a thing of the past with an Industry leading figure as low as 0.1%. Dynamic Feed Roll™ technology provides the most efficient on-the-go stone collection and the new serrated blades are even gentler on straw. Opti-Clean™ technology ensures the cleanest grain sample and you can choose between two types of rotor to match your individual harvesting needs.




ABSOLUTE DRIVING PLEASURE

The all-new Harvest Suite™ Ultra cab has been designed to deliver ultimate harvesting comfort and ergonomics. The larger, 3.7m³ cab with 6.3m² of glass, almost 7% more than previous models, means more space and more glass add up to more comfortable and more precise harvesting. At 73dB(A) it is still the quietest cab on the market. The 26.4cm ultra-wide IntelliView™ IV colour touchscreen monitor can be positioned on the ideal viewing arc for every operator. If you're a night time harvester, the new lighting package enables true, 24 hour productivity.

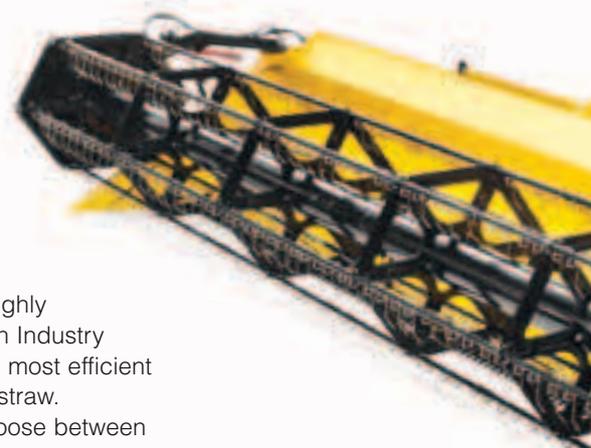

Dynamic Feed Roll™ technology

SmartTrax™ system with Terraglide™ suspension

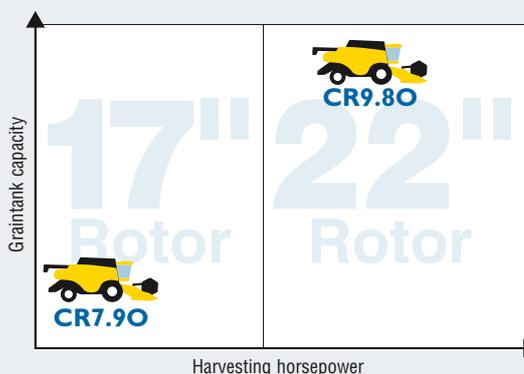

EXACTLY WHAT IT SAYS ON THE SHIELDING

The performance of a CR combine is immediately obvious. How? By the model number on the side! The first digit of the model number, whether a 7 or a 9 denotes the class of combine. The higher the number the more powerful the combine. The final two digits, either 80 or 90 indicate its position within the class. A higher number means a higher-capacity combine.

**Harvest Suite™
Ultra cab**

Twin Rotor™ technology

Up to 12,500 litre grain tank

New pivoting unloading spout

Opti-Spread™ system

Opti-Clean™ system

Opti-Fan™ technology


Varifeed™ header



A HISTORY OF MODERN COMBINING BY NEW HOLLAND

BUILT IN ZEDELGEM

The flagship CR models are built in Zedelgem, Belgium, home to New Holland's global Centre of Harvesting Excellence. It is here, over 100 years ago, that Leon Claeys built his very first threshing machine that revolutionised the way farmers harvested. Zedelgem is synonymous with harvesting firsts, in 1952 it produced the first European self-propelled combine harvester. Today, yellow blooded engineers are committed to developing the next generation of harvesting products. The sophisticated product development process and the extensive knowledge of a dedicated workforce of a World Class Manufacturing facility ensure the CR range, together with all flagship harvesting products, the CX conventional combines, BigBaler large square balers and FR forage harvester, continue to set the benchmark in harvesting.

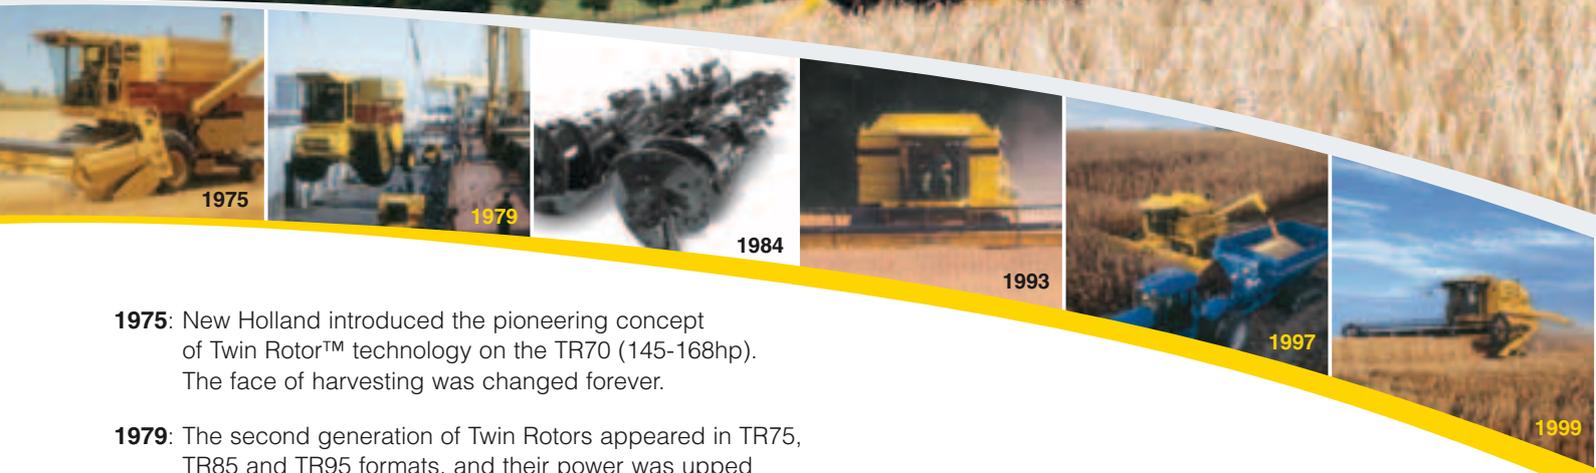

1975: New Holland introduced the pioneering concept of Twin Rotor™ technology on the TR70 (145-168hp). The face of harvesting was changed forever.

1979: The second generation of Twin Rotors appeared in TR75, TR85 and TR95 formats, and their power was upped from 155-225hp.

1984: A bigger cab, improved visibility and S³ rotors characterised the third generation of machines. Farmers welcomed TR76, TR86 and TR96 models.

1993: Almost a decade later, the TR87 and TR97 fourth generation combines made their mark with more power on offer.

1997: Simplified controls made harnessing even more power on the fifth generation TR88 and TR98 combines more efficient and productive.

1999: Six generations down the line, the higher grain handling capacity and enhanced visibility were the hallmarks of the TR89 and TR99 models.

2002: A sleek, fresh looking seventh generation graced the world's fields. The completely new styling, longer rotors, a larger cab and the first self-levelling cleaning system on a rotary combine all combined to make the CR960 and CR980 models highly desirable. By the way, did we forget to mention they produced up to 428hp

2004: The beginning of the new millennium saw production of Twin Rotor combines start in Zedelgem, Belgium, New Holland's Centre of Harvesting Excellence.

2005: Three decades of Twin Rotor™ success was celebrated with the introduction of the IntelliView™ II monitor for precision machine control.

2007: The CR Elevation series, was the eighth generation and featured a whole host of productivity boosting elements including: up to 530hp Tier 3 engines, Opti-Clean™ system and IntelliCruise™ system for consistent feed load, with smooth changes of speed for optimised performance and operator comfort.

2008: The CR9090 becomes officially the world's highest capacity combine. It smashed the harvesting record: officially harvesting 551 tonnes of wheat in under eight hours.

2015

THE HISTORY OF SUCCESS CONTINUES!



2010: The CR range celebrates its 35th anniversary. Production of the CR9060 for Latin America starts in Brazil.

2011: The ninth generation of Twin Rotor combines is launched, featuring Tier 4A compliant ECOBlue™ SCR engines, improved capacity, as well as best-in-class grain and straw quality.

2012: The CR range wins the prestigious 'Machine of the Year' award thanks to its unsurpassed harvesting performance and industry-leading grain quality.

2013: The introduction of the Dynamic Feed Roll has further improved in-field performance and grain quality.

2015: The 10th generation CR range celebrates 40 years of harvesting excellence with the introduction of the benchmark Harvest Suite™ Ultra cab.

LEADING FROM THE FRONT

New Holland knows that the harvesting process starts with the crop. How it enters the machine will determine the quality of the harvest, therefore, a vast range of grain headers to suit every type of crop and farm have been developed and built in-house to suit your needs. Headers are available in widths ranging from 6.10 - 12.50 metres and in a wide range of configurations that can be tailored to match your requirements.



VARIFEED™ GRAIN HEADERS: ADAPT TO ALL TYPES OF CROP

In order to guarantee optimum harvesting quality and a uniform cut in fields of different crop heights, the Varifeed™ header is your perfect partner. The knives can be adjusted by a full 575mm in their fore-aft position for ideal feeding. The 660mm diameter auger with deep flights provides fast, smooth feeding even in the heaviest crops. Full-width retracting fingers between each auger flight move crop down and under the auger, and can be electro-hydraulically adjusted in all directions from the cab for smooth, continuous feeding. These headers are available in 6.10 - 12.50 metres.



FULLY INTEGRATED RAPE KNIVES

Optional 18 teeth rape knives scythe through matted crops and can be quickly and simply fitted to the Varifeed™ header. Controlled through the IntelliView™ IV colour touchscreen monitor, they guarantee more efficient rape harvesting. When not required, they can be stored in the dedicated compartment on the header itself.

Grain headers		CR7.90	CR9.80
Varifeed™ grain header cutting width	(m)	6.10 - 9.15	7.62 - 12.50
Superflex headers cutting width	(m)	6.10 - 10.67	7.62 - 10.67




HIGH CAPACITY GRAIN HEADERS

In conventional farming situations, the traditional high capacity grain headers are perfect. The High Capacity header features a heavy duty construction with a hydraulic reel drive, perfect for the heaviest crops. The larger 606mm diameter auger and 1150 cuts per minute improves capacity, forward speed and intake volumes.



FLEXIBILITY FOR GUARANTEED HARVESTING EFFICIENCY

In undulating terrain, the Superflex header is the default choice. The flexible knife bed can flex a full 110mm in uneven fields to ensure a close cut and uniform stubble height, and the full-floating auger with deep flights provides fast, smooth feeding even in the heaviest crops. When combined with 1150 cuts per minute and the cab-based hydraulic fore and aft reel adjustment, precise feeding and processing are a given. You can even maintain a pre-set ratio between reel speed and ground speed, so that when ground speed changes consistent feeding is guaranteed.



AUTOMATIC HEADER HEIGHT CONTROL

The advanced Automatic Header Height Control system is available in three operational modes:

- Compensation Mode uses a pre-established ground contact pressure that is hydraulically maintained to ensure efficient harvesting of laying or low growing crops such as peas and beans.
- Automatic Stubble Height Control maintains a pre-set stubble height by using sensors located on the underside of the header together with the hydraulic header control cylinders.
- The Autofloat™ system uses a combination of sensors that ensure the header follows uneven terrain and automatically adjusts its position hydraulically to maintain uniform stubble height and to prevent the header digging into the ground.

A PERFECT MATCH

ALL-NEW HIGH PERFORMANCE MAIZE HEADERS

New Holland has developed an all-new maize header line-up which has been engineered by design to perfectly match the CR's operating profile. Following extensive field testing, both the rigid and flip-up versions deliver improved harvesting productivity and reliability. Like combine. Like header.

MODERN MAIZE HEADERS FOR MODERN MAIZE FARMING

The upgraded maize header line-up perfectly satisfies the demands of modern maize harvesting to boost productivity and harvesting efficiency. The shorter points better follow ground contours to prevent 'run-down' of valuable crops. The gills direct any loose kernels to the back to the header, consigning wasted cobs to the history books. The replaceable wear strips extend the headers lifespan and all points flip up on self-supporting gas struts for easy cleaning and maintenance. Modern maize headers for modern farmers.

STALK STOMPER TYRE PROTECTION

An optional Stalk Stomper kit is now available for fixed or flip-up maize headers to reduce tyre or track wear when harvesting maize. Mounted on the header frame, the Stalk Stompers flatten the stubble in front of the wheels, greatly reducing the likelihood of punctures or uneven tyre or track wear.



BEST-IN-CLASS STALK CHOPPING

For fine chopping and superb spreading of mulched material, integrated stalk choppers can be fitted. This is perfect for minimum or zero tillage operations. The cutting blade is situated underneath the header, and maximum flexibility is guaranteed thanks to individual row engagement. Customers agree: New Holland truly offers a 'best-in-class' solution.

Maize headers	CR7.90	CR9.80
Number of rows flip-up maize headers	8	8
Number of rows rigid maize headers	8	8 / 12



FLIP-UP OR RIGID: THE CHOICE IS YOURS

Rigid headers are available in 8 row configurations to enable you to choose just the right size for your fields and customers. The flip-up versions are perfect for transport intensive operations and 8 row variant complies with the stringent 3.5 metre transport width restriction.



DEPENDABLE OPERATION

Regardless of size, New Holland maize headers are designed for top harvesting performance in all crop conditions. The stalk rolls have four knives for aggressive pulling down of stalks of any size, and the deck plates are electronically adjustable from the cab to adapt to changing stalk and cob size. Optional rotary dividers further enhance the already smooth crop intake in laid maize crops.

ENHANCED PROTECTION FOR IMPROVED EFFICIENCY

The CR's feeding system has been significantly upgraded to enhance its already highly efficient operation. The feeder now features four chains with connecting slats on the CR9.80 model for improved crop flow and even smoother feeding into the Twin Rotors. The CR range benefits from an improved header lift capacity for ultimate productivity when working with the very largest headers, and you can choose between the Advanced Stone Protection system or the optional, Dynamic Feed Roll™ system which both ensure the threshing mechanism is always fully protected.



NEW DYNAMIC FEED ROLL™ SYSTEM

This on-the-go mechanical system delivers maximum feeding efficiency and stone detection effectiveness in extremely stony conditions. Stones are automatically directed by a 45cm diameter closed beater into a dedicated stone trap located between the feeder and rotors. There's no stopping, no hesitation, no interruption of the harvesting process. This non-stop harvesting increases capacity by up to 10% when operating on the stoniest ground. The system now features serrated blades so that it is even gentler on the crop to deliver higher quality, more profitable straw. The stone trap is easily emptied during routine daily checks.



MAKING BLOCKAGES A THING OF THE PAST

Header blockages are instantly cleared by the hydraulic reversing system. The entire header and elevator can be 'rocked' backwards and forwards to effectively unblock the machine for minimum downtime and maximum harvesting uptime.



ADVANCED STONE PROTECTION SYSTEM

The unique Automatic Stone Protection System (ASP) uses a detection sensor located under the closed lower drum of the straw elevator. When a stone is detected, the full width pivoting door automatically opens and the stone is ejected. This solution requires minimal operator input and ensures an unobstructed flow of the crop from the feeder to the rotors. This enhances grain and straw quality, as well as capacity, not forgetting the automatic protection of the internal feeding elements for extended machine life.



INTELLICRUISE FOR INCREASED PRODUCTIVITY

The IntelliCruise™ Automatic Crop Feeding system automatically matches the forward speed to crop load. A sensor on the straw elevator driveline continually monitors the demand placed on the header, so in areas of lighter crop, forward speed is automatically increased to guarantee the combine works at full capacity independently of areas of differing yield.



WORLD-CLASS GRAIN QUALITY

New Holland invented the Twin Rotor™ concept over 40 years ago, and has been refining and evolving this technology for almost four decades to offer farmers ever increasing capacity and improved grain and straw quality. New Holland also knows that no two farms are alike, so two different types and sizes of rotor have been developed to suit farmer' individual needs. The 17" standard rotors are fitted to the CR7.90 model, and the heavy duty, high capacity 22" design are fitted to the CR9.80 model. A bespoke machine for top drawer quality and performance.




STRAW PROCESSING

Once the straw has reached the end of the rotors, the 400mm diameter straw flow beater moves straw onto the positive straw discharge belt. This belt directs the straw rearwards, for efficient flow through to the rear of the combine.


EVERYTHING IN GOOD TIME

The rotor vanes can be precision adjusted to either accelerate or slow down the crop flow to regulate the time provided to thresh and separate the grain.

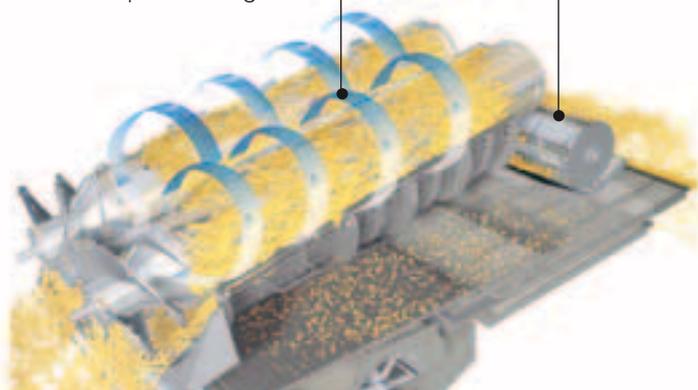

CONCAVE FLEXIBILITY

For operations that harvest a variety of crops, crop-to-crop flexibility is achieved courtesy of easy to change concaves and separation grates. Choose between the very finest small wire options for small grains right through to the round bar concaves and grates for maize and soya beans.

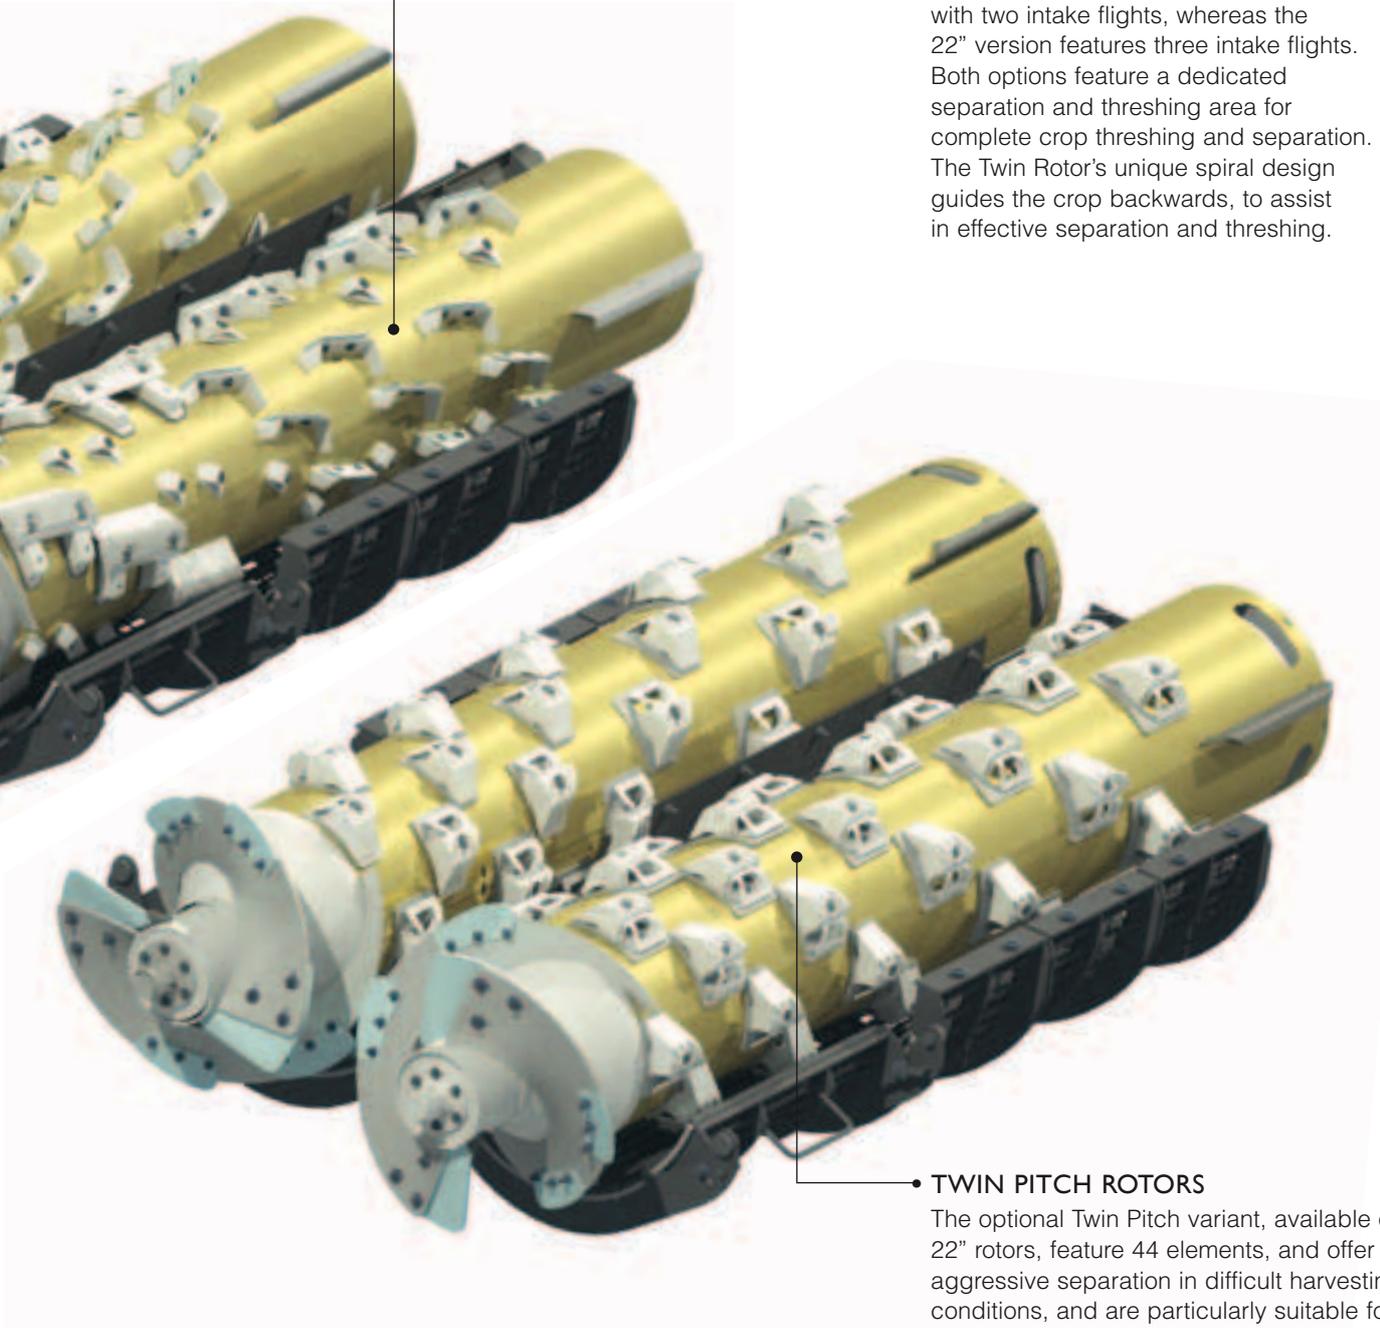


• **STANDARD ROTORS**

The S³ rotors are available in a 17" version with two intake flights, whereas the 22" version features three intake flights. Both options feature a dedicated separation and threshing area for complete crop threshing and separation. The Twin Rotor's unique spiral design guides the crop backwards, to assist in effective separation and threshing.

• **TWIN PITCH ROTORS**

The optional Twin Pitch variant, available on the 22" rotors, feature 44 elements, and offer aggressive separation in difficult harvesting conditions, and are particularly suitable for damp conditions, where they can offer up to a 10% increase in capacity. Two different kits are available which enable operations to select, or even convert between, rice and small grain configurations.

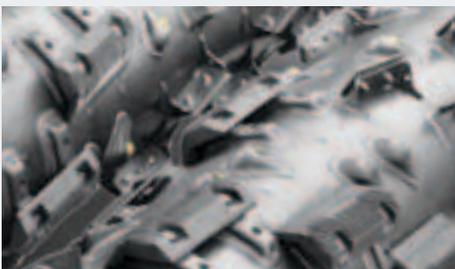

**THE PERFECT MATCH
WHATEVER YOUR CROP**

The CR offers the ultimate in flexibility, and the Twin Rotors are fully customisable: change the rasp bars, agitation pins and separating wedges to ensure the perfect threshing and separation conditions whatever the crop.


THE CLEANEST GRAIN SAMPLE

Best-in-class grain quality. The Industry's cleanest grain sample. It must be the CR. Don't just take our word for it: in comparative tests carried out to evaluate the grain sample of different harvesting concepts, Twin Rotor™ technology beat the competition hands down. The result: a minuscule 0.1% broken grain. How? Thanks to the unique Twin Rotor™ concept which ensures in-line crop flow for the gentlest grain handling. Grain quality is further enhanced by award winning features including the Opti-Clean™ and Opti-Fan™ systems.



GRAVITY DEFYING OPTI-FAN™ TECHNOLOGY

The Opti-Fan™ system compensates for the gravitational effects on crop material during harvesting. Select the desired fan speed on flat ground, and the system automatically adjusts it when going up or downhill to maintain cleaning performance. When travelling on upward slopes the fan slows down to prevent sieve losses, and when tackling downhill gradients fan speed increases to prevent thick material build ups on the sieves. This efficient system requires no extra work from the operator and provides a better grain sample together with reduced losses.

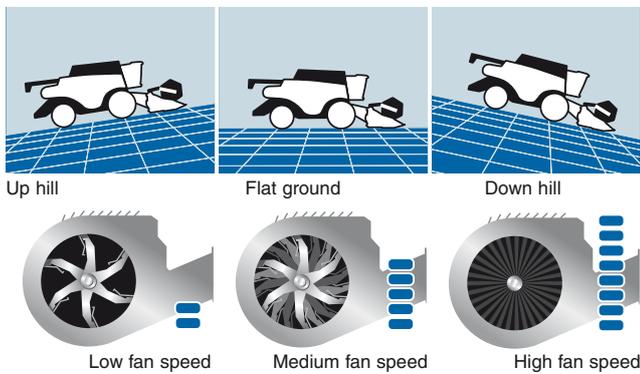


THE CLEANEST GRAIN FOR THE HIGHEST REWARDS

With a total area under wind-control of 6.54m² on the CR9.80 model, and of 5.40m² on the CR7.90 model, the cleaning shoe efficiently handles the largest grain volumes. The Opti-Clean™ system optimises the stroke and throwing angles in the cleaning system. The grain pan, pre and top sieves operate independently to optimise the cascade for greater capacity, and the longer sieve stroke and steep throwing angle keep more material airborne, for even higher cleaning efficiency. The opposing motion of the grain pan and bottom sieve to the pre-sieve and the top sieve reduces overall machine vibrations and increases operator comfort.



PRECISION AIRFLOW

The CR range's unique paddle fan design generates the largest volume of air at a constant pressure, which is far superior to competitor alternatives. Moreover, the fan has two dedicated openings to direct a powerful stream of air to both the pre and top sieves for guaranteed cleaning performance.

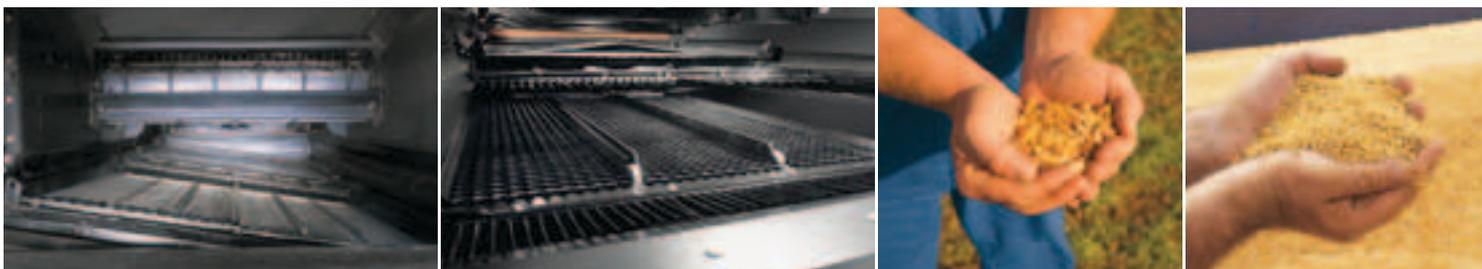

NEUTRALISE SIDE SLOPES OF UP TO 17%

The self-levelling cleaning shoe automatically optimises the cleaning shoe angle by up to 17% to neutralise the effects of side slopes, and also prevents grain banking during headland turns, to assist in uniform crop distribution and unsurpassed cleaning performance.

ADJUST YOUR SIEVES FROM YOUR SEAT

In changing crop conditions you can remotely adjust the sieves from the comfort of your seat. Simply open the sieve in heavier crops to allow greater wind flow or reduce the sieve opening in lighter crops, to prevent losses and improve harvesting efficiency.

THE CR REMEMBERS YOUR CROPS


To reduce unproductive set-up time when switching between crops or when working in varying crop conditions, the CR features Automatic Crop Setting (ACS), with fifty crop-specific settings. The operator either selects from pre-installed settings, or simply programmes two harvest parameters for each crop, including reel speed and position, rotor speed and concave setting, sieve opening and cleaning fan speed, and recalls these on the IntelliView™ IV monitor when required. Push button simplicity from New Holland.

HIGH VOLUME GRAIN MANAGEMENT

A SUPER-SIZE GRAIN TANK FOR SUPER-SIZED PERFORMANCE

The CR grain tank has been increased to perfectly match its high capacity. The length of the unloading auger has also been enlarged to match the performance of the new generation of CR combines and modern day headers. Quite simply, New Holland has left no stone unturned in the quest to improve the CR range's output and your productivity.

Graintank	CR7.90	CR9.80
Folding covers capacity standard/optional (l)	9500/11500	12500

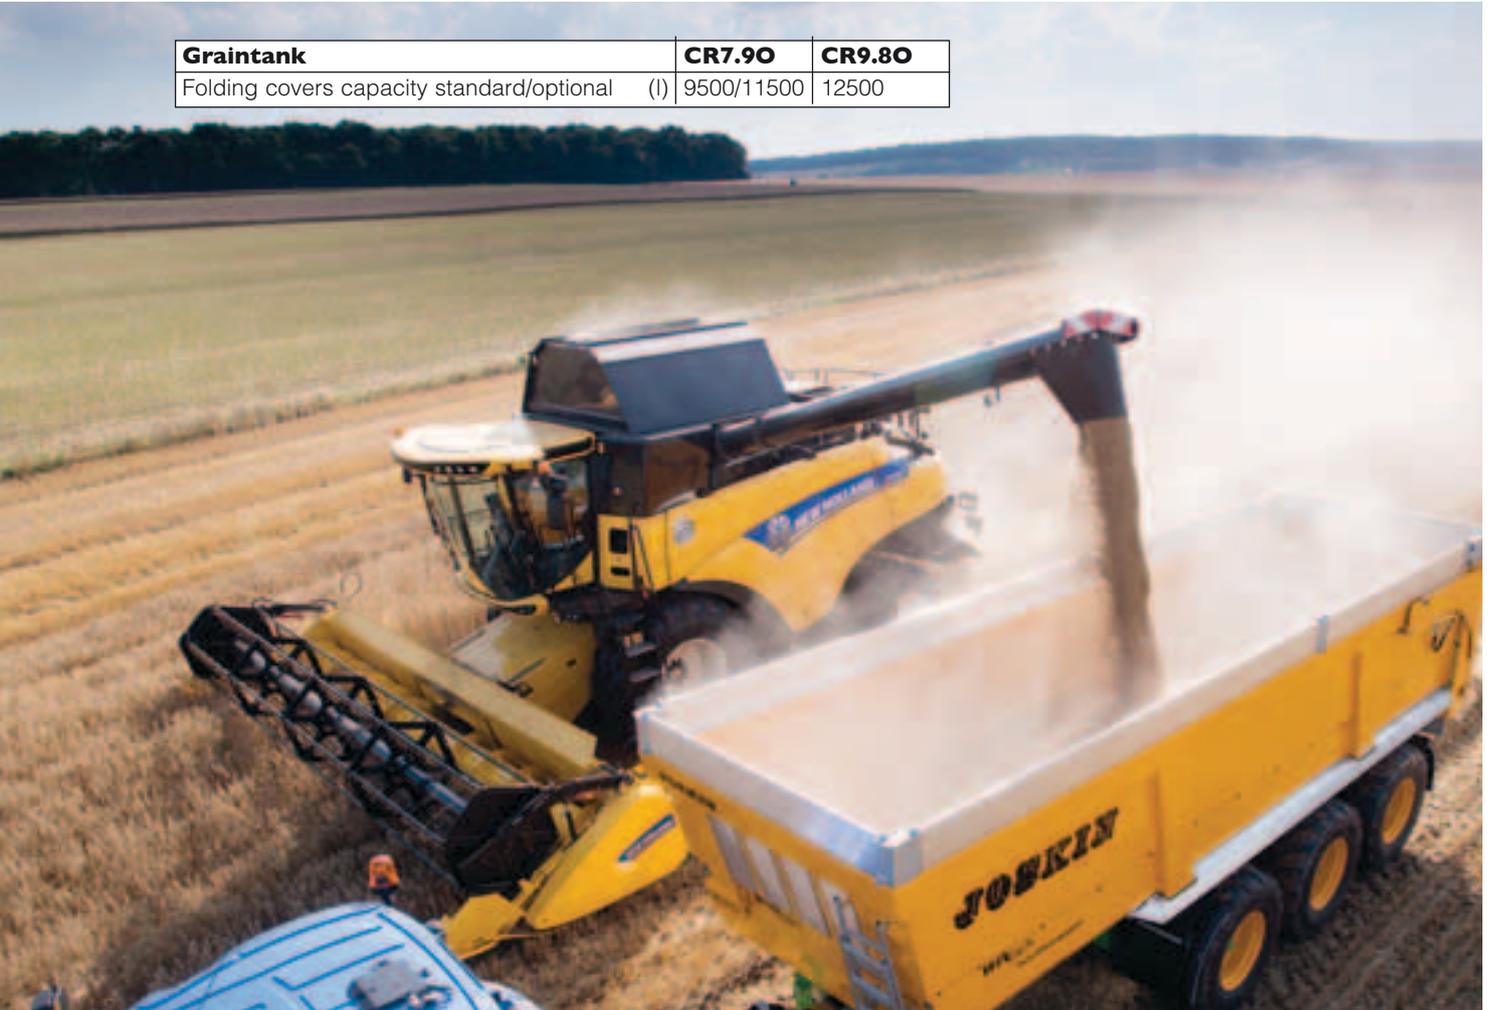

KEEP AN EYE ON YOUR GRAIN

The CR has set a new industry standard in terms of grain quality, but for your peace of mind, New Holland has designed a 910 x 550mm viewing window in the cab. Simply glance over your shoulder and you can see the quality of grain in the tank with your own eyes. You can also keep an eye on the grain tank fill level, which is displayed on the IntelliView™ IV monitor. If you want to take things a stage further, a grain sample flap, accessible from the operator's platform, assists physical sampling activities.

ROBUST OPTION FOR ABRASIVE CROPS


For prolonged operation in abrasive crops such as rice, the CR can be specified with the 'abrasive option'. The rotor covers, grain elevator, bubble-up auger and unloading auger are manufactured in heavy-duty materials to withstand prolonged operation in such crops.

POWER SAVING DRIVELINES

Overall reliability and low power consumption are the result of proven, direct drivelines and the four-speed hydrostatic transmission. Positorque variators are continued on the new CR range, and they still offer simple efficient technology that means more power for harvesting when compared to heavy power sapping CVT competitor alternatives. Remember: simplicity is always the best policy.

Models	CR7.90	CR9.80
Engine*	FPT Cursor 9	FPT Cursor 13
Compliant with engine emissions regulations	Tier 3	Tier 3
Capacity (cm ³)	8700	12900
Injection system	Common Rail	Unit injectors

* Developed by FPT Industrial

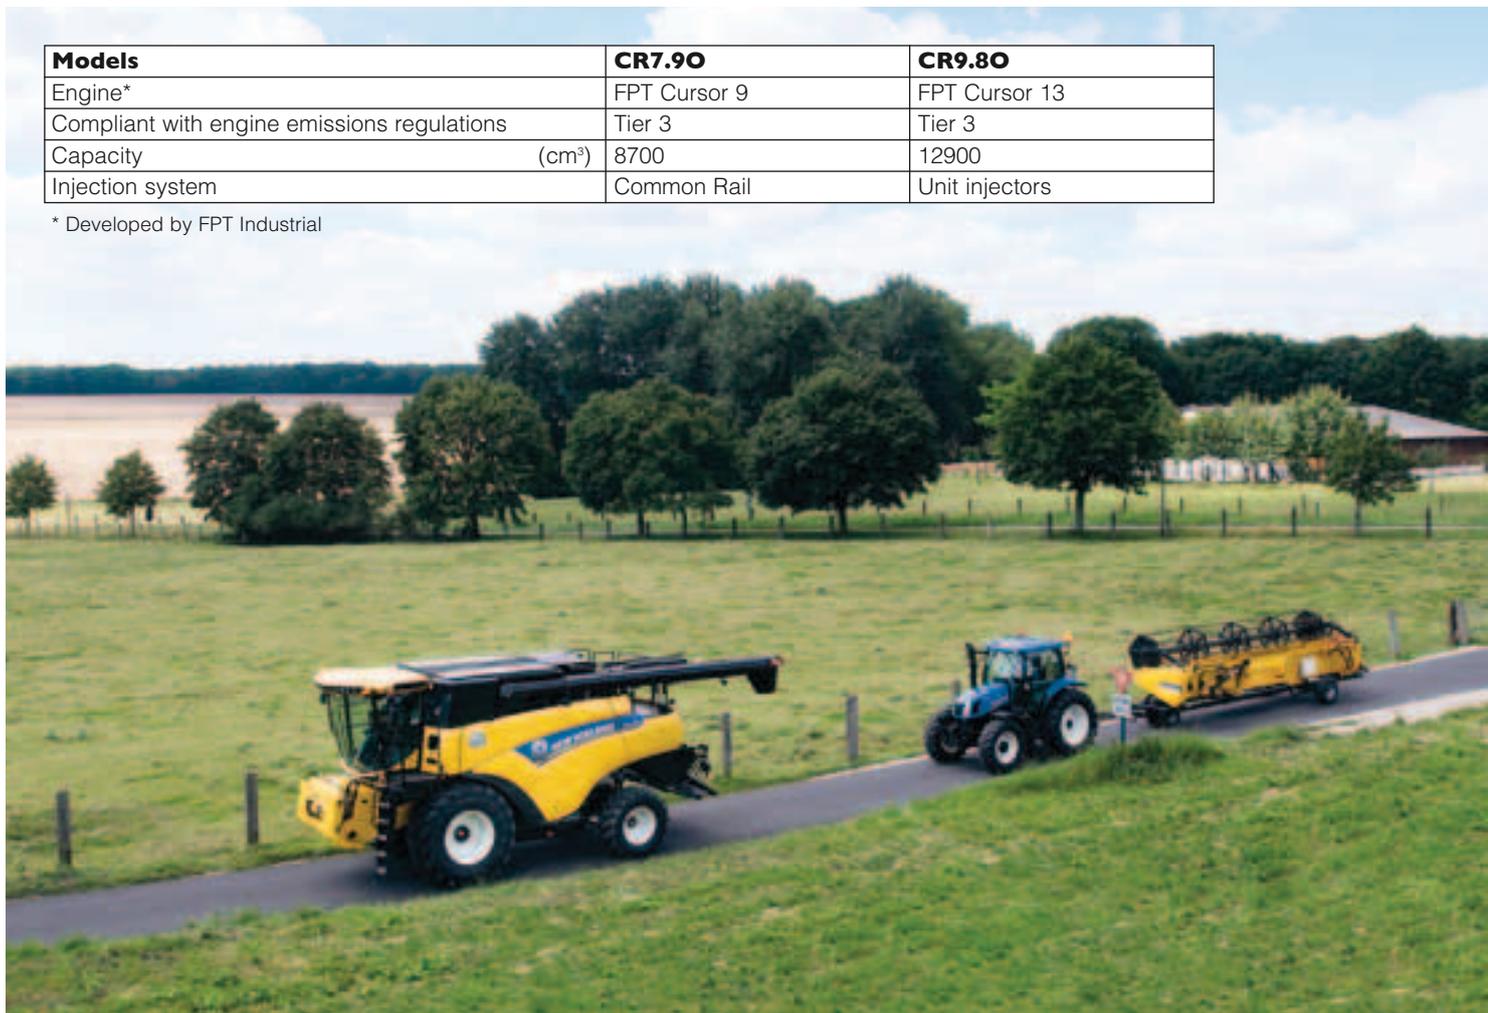

VAST TYRE OFFERING

The CR can be specified with a wide range of tyres to suit your individual needs, from the narrowest 710/70R42 to meet strict transport widths and to negotiate narrow gateways, right up to the largest 900/60R38 tyres which can reduce compaction by up to 35%. Moreover, a 40kph ECO transport speed, which is available across the entire range, saves fuel and cuts productivity impacting transport time to ensure more crop is harvested at its optimum ripeness.



SUPER TIGHT TURNING

The CR's compact design and impressive 50° steering angle, give it has a turning circle of a mere 14m. This means smaller headlands for improved straw quality and reduced harvesting time, together with a tighter headland turn for less time turning and more time harvesting.

FLEXIBLE SOLUTIONS RIGHT FOR YOUR OPERATION

The CR range offers complete and comprehensive residue management options that can be tailored for different types of crop and cultivation methods. A new optional dedicated button on the right hand side console enables you to switch between chopping and rowing. This is in addition to the traditional mechanical method which entails using a dedicated ergonomic lever. No need for tools. No need to change components. No need to even get out of the cab. Simple. Fast. Typically New Holland.





**OPTI-SPREAD™ SYSTEM:
SPREADING WIDE. ALWAYS**

When using the largest 12.5m Varifeed™ header on the CR, a dedicated and powerful straw spreading system is a must. The optional Opti-Spread™ straw spreader mounted behind the straw chopper easily meets any spreading width requirement. This system has been further enhanced with the addition of Dual-Chop™ technology. All residue passes through a dedicated rake containing razor sharp blades to ensure a superfine chop of all material. This is perfect for minimum or no tillage operations that employ direct cultivation techniques. The Opti-Spread™ system is controlled from the comfort of the cab, and the two powerful discs can be adjusted to counteract any wind or side-slope impact.



PERFECT BALES

Twin Rotor™ technology offers perfect in-line crop flow, and eliminates the need for aggressive changes in speed and direction. As a result, the straw structure is maintained and breakages are minimal, even when working at the highest outputs. This makes its straw perfect for baling. Straw flow is maintained as the straw flow beater moves the straw onto the positive straw discharge belt. The twin-disc chaff spreader can spread the chaff or direct it onto the ground, under the straw to be baled.

**CHOPPING FINE, SPREADING WIDE.
NEW HOLLAND STRAW CHOPPERS**

The New Holland in-house range of straw choppers have been developed to perfectly match the CRs' performance. Choose between four and six chopper configurations with wind blades installed at the outer edges of the rotors for high spreading capacity. The high speed, 3500rpm chopper, ensures fine chopping and wide spreading of even the heaviest crops.


SMARTTRAX. REDUCED COMPACTION. SUPERIOR COMFORT.

FITTED IN THE FACTORY FOR IMPROVED PERFORMANCE ON THE FARM

The all-new SmartTrax™ system has been engineered by design to offer 57% reduced ground pressure thanks to its triangle structure for improved traction and reduced compaction. The factory fitted SmartTrax also feature an integrated rubber block suspension system which significantly reduces vibration when compared to a traditional fixed track system, for guaranteed comfort during even the longest harvesting days and in road transport situations.


POSITIVE, EFFICIENT DRIVE

The positive lugs on the inner side of the tracks maintain physical contact with the drive wheel for the ultimate in efficient power transmission.

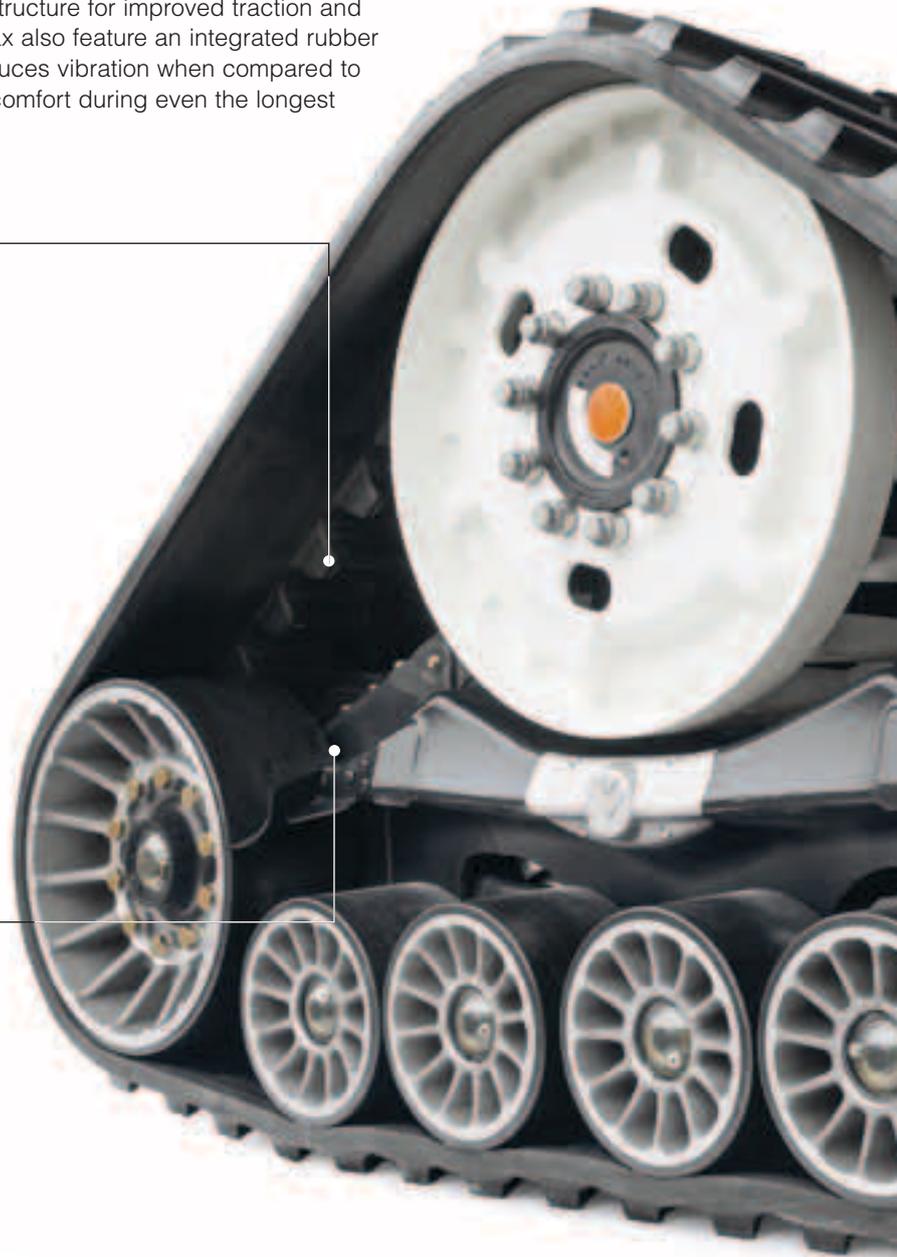

TROUBLE FREE TRACK SETTING

SmartTrax feature a continuous heavy duty tensioning system which ensures that the correct track tension is always maintained for ideal traction. This automatic hydraulic system requires no operator input, so they can get on with the serious business of harvesting. Moreover, the tensioning system is completely separate from the drive wheel, for ultimate simplicity and reliability.

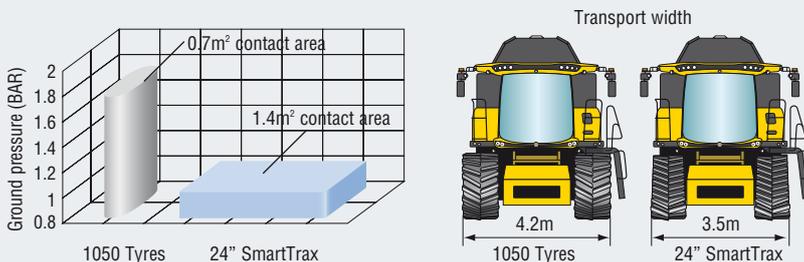

A TRACK TO SUIT YOUR NEEDS

SmartTrax are available in two widths to suit your operation: standard 24" and for those working in demanding conditions, a 30" option is available. SmartTrax offer your operation numerous benefits including enhanced stability, 100% increase in contact area when compared to tyres, all whilst maintaining manoeuvrability within the 3.5 metre transport width.



GLIDE OVER THE FIELD IN ABSOLUTE COMFORT

Why complicate matters? Simplicity is always the best policy. The rubber block suspension system offers a tried and tested, reliable solution to significantly reduce vibrations for enhanced operator comfort and productivity. Ride quality is further improved by the three central independent rollers which move in conjunction with the terrain to cushion the operator from even the harshest shocks.




• TRACTION WITHOUT QUESTION

The SmartTrax triangle design, together with the rubber cleats on the outer belt, ensure a positive contact with the soil and unsurpassed traction when working on the steepest slopes or in the wettest or dustiest conditions. Traction without question.

• SMARTTRAX™ SYSTEM WITH TERRAGLIDE™ SUSPENSION: YOUR COMFORT PARTNER

The SmartTrax™ rubber tracks with Terraglide™ suspension system bring New Holland's acclaimed suspension technology to tracks. Optional on all models, they are available in 24" and 28.5" widths. Two pairs of hydraulic suspended rollers work together to produce a silky smooth ride. Want more? How about a longer track length for a larger overall footprint for reduced field compaction and enhanced traction.

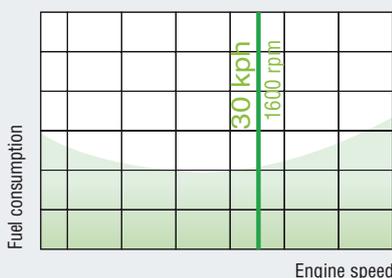


SAVING TIME. SAVING FUEL.

With a top transport speed of 30kph at a mere 1600 engine rpm, the new CR range, when fitted with SmartTrax, is the obvious choice for operations looking to enhance productivity, with more time in the field and less time on the road, and to save on their fuel bills. Fuel economy is further enhanced by the super low rolling resistance, which offers significant savings over competitor solutions.

A NEW BENCHMARK FOR HARVESTING COMFORT

The CR range of combines quite simply offers you a home away from home during long harvesting days and nights. The Harvest Suite™ Ultra cab is completely new from the floor up and is the fruit of extensive customer consultation. The cab volume has increased to 3.7m³ and boasts 6.3m² of glass, 7% more than previous models. You can enjoy all that space in the peace and quiet of the near silent 73dB(A) cab.



ARE YOU SITTING COMFORTABLY?

Choose from three seating options:

1. The standard wide cloth trimmed seat provides exceptional features and ensures all operators will stay comfortable throughout the longest harvesting day.
2. The optional deluxe cloth trimmed seat with heating and active ventilation is perfect for the hottest days and the coldest nights, and features fore/aft movement for even more comfort.
3. The top of the range leather trimmed seat features all the above and extended vertical travel and automatic weight adjustment absorbs even the most severe bumps to offer the ultimate in operator comfort and style.

360° PANORAMIC VIEW

The Harvest Suite™ Ultra cab's wide curved window offers a perfect view. The floor slopes down into the front windscreen so that you will have an even clearer view of the edge of the header, and the side glass perfectly follows your headers trajectory for an uninterrupted view of the unloading auger. Standard wide angle electric mirrors mean you can see in all directions, and they can be easily positioned from the comfort of the cab. Up to three optional viewing cameras can be managed through the new IntelliView™ IV monitor, and one has been pre-wired for reversing. When unloading, reversing or checking the grain tank level, they are the eyes in the back of your head.



BRIGHT LIGHTS FOR DARK NIGHTS

The CR's lighting package has raised the lighting bar. The spread of light has been engineered for maximum visibility of the entire header and the field ahead. Precision unloading in the dead of night. You'll never lose a single grain thanks to specific unloading auger lights. Additional rear lamps enable operators to monitor residue and two lamps located on the side panel illuminate the rear axle to prevent crushing standing crop and to assist when manoeuvring. You even have the choice between HID and LED long distance packages. You can also get off of your combine in complete safety courtesy of the entrance light, which remains on for 30 seconds after you've switched the combine off.

STAY REFRESHED ON THE HOTTEST DAYS

During long hot harvesting days, the integrated fridge under the instructor seat will mean a refreshing drink is only ever an arm's length away. Want more? Well, it can be easily removed for easy replenishment. Air conditioning comes as standard, or upgrade to the optional Automatic Climate Control system which automatically adjusts fan speed to guarantee accurate temperature to within one degree Celsius. The CR is definitely the coolest place to be.


EFFORTLESSLY MAXIMISING PERFORMANCE

Intelligent and intuitive automation saves times and enhances harvesting performance. The CommandGrip™ multifunction handle is your right hand harvesting man. All key machine and header parameters can be controlled, including header height, reel position and unloading engagement. The right hand console contains less frequently used functions, which are laid out in an ergonomic and logical manner. Machine functions can be analysed at a glance courtesy of the colour IntelliView™ IV monitor.



Forced based movement enables the operator to change speed and direction

- Reel speed and header reverser direction control
- Emergency Stop (Header and Unloading)
- Reel position, Varifeed™ knife or flip-up maize header plus shift button
- Unloading auger position
Unloading auger engagement
- IntelliSteer® and IntelliCruise™ engagement
- Automatic header height activation
- Two-speed header lift, lowering system and header lateral movement



Shift button and ground speed unlock (behind)

- Header reverse activation
- Opti-Spread™ control
- Engine speed
- Automatic header height modes
- Header width correction
- Automatic Crop Settings switch
- IntelliCruise™ engagement
- Powered rear wheels engagement
- Chopping / Rowing selection
- Electronic park brake
- Electronic gear selection





A PLACE FOR EVERYTHING

You now have space to store everything you need. A large compartment behind the operator is perfect for stowing away essential documentation.



WIDE-SCREEN HARVESTING

The ultra-wide 26.4cm IntelliView™ IV colour touchscreen monitor is fixed on rollers which can move along an ideal viewing arc so you can position it just where you want. This intuitive, colour touchscreen displays and monitors all combine functions and parameters which can be simply and easily adjusted by simply touching the screen. A second screen can be installed on request and is perfect for IntelliSteer® auto guidance tasks.



- Header and feeder engagement
- Threshing engagement
- Vertical side knives left and right engagement
- Road / Field mode
- Reel speed synchronisation
- Rotor speed control
- IntelliSteer® guidance activation
- Concave position
- Grass seed unload
- Open / close grain tank cover
- Fold / unfold unloading spout
- Cleaning fan speed
- Upper sieve opening
- Lower sieve opening



NEW HOLLAND GUIDANCE SYSTEMS TO MATCH YOUR NEEDS

GET IN AND AWAY YOU GO


A full range of guidance solutions are available from New Holland and include manual and assisted guidance. You can even specify your CR combine with fully integrated IntelliSteer® auto guidance direct from the factory to start saving money from your first run. SmartSteer™ crop edge guidance and automatic row guidance for maize headers are just some of the numerous options which are designed to increase your harvesting efficiency and productivity.

FULLY INTEGRATED INTELLISTEER® GUIDANCE

All CR combines can be ordered direct from the factory with IntelliSteer, New Holland's fully integrated auto guidance package. Fully compatible with the most accurate RTK correction signals, IntelliSteer can guarantee pass-to-pass and year-to-year accuracy as low as 1 - 2cm. The result? Fields which are cleanly harvested, so every grain gets safely stored in the tank.


INTELLIVIEW IV: VISIBLE INTELLIGENCE

The standard IntelliView™ IV monitor can be used to set up the optional New Holland IntelliSteer® auto guidance systems. It enables the programming of a variety of guidance paths, from straight A-B runs to the most complex adaptive curves. You can also personalise your settings and even transfer information from your combine, direct to your precision farming software package.



NH 372 RECEIVER

The New Holland 372 antenna receives both DGPS and GLONASS signals and is fully compliant with EGNOS, OmniSTAR, or RTK correction. For RTK applications, a slim profile radio is mounted underneath the receiver. The antenna is positioned on the top of the grain tank to improve signal reception and enhance operation.



RTK BASE STATION

An RTK base station can be used to broadcast a correction signal to achieve a pass to pass accuracy of 1-2cm.




INTEGRATED CONTROL SYSTEMS

The New Holland IntelliSteer® system uses built in T3 terrain compensated correction signals to keep the Navigation Controller II informed of the combine's orientation. An integrated control valve converts the signal from the Navigation Controller II into the hydraulic movements of the steering system.

INTEGRATED YIELD AND MOISTURE SENSING

INTEGRATED MONITORING FOR INCREASED YIELD AND CROP QUALITY

The CR range of combines have been engineered by design with precision farming features right at its very heart. Yield information is continually updated and displayed on the IntelliView™ IV monitor. This data can be stored, downloaded and analysed with precision farming software to establish accurate yields maps. These can be used to fine tune inputs to maximise yields and minimise input costs.

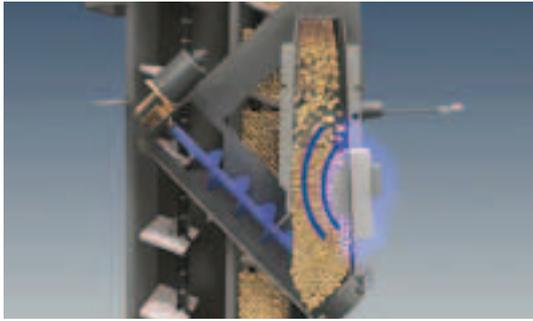

REAL TIME MOISTURE SENSING

New Holland's moisture sensor measures grain moisture in real time. Samples are taken every 30 seconds and the data is sent to the IntelliView™ IV monitor. The operator is kept continually informed and can adapt machine parameters accordingly.



YIELD MAPPING

The exclusive patented, high accuracy yield sensor developed by New Holland is generally recognised as the best in class. Its design neutralises the rubbing effect of grain. Whatever the kind, the variety or the moisture content of the kernel, the sensor generates an extremely accurate yield measurement. Furthermore, calibration is performed just once a season, and the system then automatically adapts to changing crops and conditions. Hands off operation for ultimate harvesting simplicity.

TELEMATICS: MANAGE YOUR MACHINE FROM THE COMFORT OF YOUR OFFICE

PLM® Connect enables you to connect to your combine from the comfort of your office through the utilization of the mobile network. You can stay in touch with your machines at all times, and you can even send and receive real-time information that saves time and enhances productivity. The entry-level PLM® Connect Essential package offers the most frequently used features or upgrade to the PLM® Connect Professional package for full machine monitoring and control.

PLM *CONNECT*



360°: CR

The new CR range has been designed to spend more time working and less time in the yard. After all, we all know how precious time in the field is during short harvesting seasons. The variator lubrication function automatically lubricates all moving parts at pre-set intervals and guarantees even lubrication by controlling the application pressure. All service points are easy to access, and super long service intervals mean they will spend more time in their natural environment: the field!



Engine and hydraulic oil can be checked at a glance, without the need to open complicated panels.

Plastic rotor covers can be removed without tools to make seasonal checks even easier and simpler.

Self-supporting, fully opening shielding guarantees wide access to all drives and service points.



The air filter is easily accessible from the engine platform.

Easy ground-access to all oil filters and drain points and centralised greasing banks mean more efficient maintenance.



The new integrated water tank is ideal for washing hands after connecting the header.

DEALER INSTALLED ACCESSORIES

A comprehensive range of approved accessories to optimise machine performance in all conditions can be supplied and fitted by your dealer.



BEYOND THE PRODUCT

TRAINED TO GIVE YOU THE BEST SUPPORT

Your dedicated New Holland dealer technicians receive regular training updates. These are carried out both through on-line courses as well as intensive practical field based courses. This advanced approach ensures your dealer will always have access to the skills needed to look after the latest and most advanced New Holland products.

UNLIMITED SUPPORT FOR UNLIMITED SATISFACTION

New Holland gives you all the support you need, especially during the season with fast-track solutions: because your harvest can't wait! In addition, New Holland drives and tracks the solution you need, keeping you informed: until you are 100% satisfied!



**DO NOT RISK YOUR MACHINE'S LIFE.
BUY CNH INDUSTRIAL ORIGINAL PARTS!**



MODELS		CR7.90	CR9.80
Grain header			
Cutting width: Varifeed™ grain header - 575mm knife travel	(m)	6.10 - 9.15	7.62 - 12.50
Superflex headers cutting width	(m)	6.10 - 10.67	7.62 - 10.67
Knife speed Varifeed™ grain header	(cuts/min.)	1300	1300
Spare knife and spare bolted knife sections		●	●
Feeding auger with full-width retractable fingers		●	●
Reel diameter Standard / Varifeed™ grain header	(m)	1.07	1.07
Electro-hydraulic reel position adjustment		●	●
Automatic reel speed synchronisation to forward speed		●	●
Hydraulic quick coupler (single location)		●	●
Maize headers			
Number of rows flip-up maize headers		8	8
Number of rows rigid maize headers		8	8 / 12
Integrated stalk choppers		○	○
Rotary dividers		○	○
Automatic header control systems			
Automatic stubble height control		●	●
Compensation mode		●	●
Autofloat™ system		●	●
Straw elevator			
Number of chains		3	4
Fixed feeder drive		●	●
Variable feeder drive		○	○
Power Reverse™ hydraulic header and elevator reverser		●	●
Lateral flotation		●	●
Front face adjustment		●	●
ASP System (Advanced Stone Protection)		●	●
DFR System (Dynamic Feed Roll)		○	○
Harvest Suite™ Ultra cab glass area	(m²)	6.3	6.3
Cab category level - EN 15695		2	2
HID lighting pack		○	○
LED long distance lights		○	○
Standard cloth trimmed seat with air-suspension		●	●
Deluxe cloth trimmed heated air-suspension seat with Active Ventilation		○	○
Leather trimmed heated air-suspension seat with Active Ventilation		○	○
Instructor seat		●	●
Leather Steering wheel		○	○
CommandGrip™ handle		●	●
IntelliView™ IV monitor with adjustable position		●	●
2nd IntelliView™ IV monitor		○	○
Wide Angle Shatterproof Mirrors		●	●
3 viewing cameras		○	○
ACS (Automatic Crop Settings)		●	●
Air-conditioning and coolbox		●	●
Automatic climate control		○	●
Heating		○	●
Removable coolbox		○	○
MP3 Bluetooth radio (hands free phone calls)		○	○
4 speaker system		●	●
Optimum cab noise level - ISO 5131	[dB(A)]	73	73
New Holland Precision Land Management systems			
Guidance systems			
SmartSteer™ automatic guidance system		○	○
IntelliSteer® ready automatic guidance system		○	○
IntelliCruise™ system		○	○
Automatic row guidance system for maize headers		○	○
Precision farming			
Moisture measuring		○	○
Yield measuring and moisture measuring		○	○
Full Precision farming package including:			
Yield measuring and moisture measuring, DGPS yield mapping		○	○
Desktop software and software support service		○	○
Twin Rotor™ technology			
Twin Pitch rotors		○	○
S³ rotors		●	●
Rotor diameter	(mm)	432	559
Rotor length	(mm)	2638	2638
Length of auger section	(mm)	390	390
Length of threshing section	(mm)	739	739
Length of separation section	(mm)	1090	1090
Length of discharge section	(mm)	419	419
Fixed rotor vanes		●	○
Adjustable rotor vanes		○	●
Threshing concaves: Wrap angle	(°)	86	84
Wrap angle with extension	(°)	121	123
Electric adjustment		●	●
Separation concaves: Separation grates per rotor		3	3
Wrap angle	(°)	148	148

MODELS
CR7.90
CR9.80

		CR7.90	CR9.80
Beater			
Width	(mm)	1300	1560
Diameter	(mm)	400	400
Beater concave wrap angle	(°)	54	54
Total threshing and separation area	(m ²)	2.43	3.06
Cleaning			
Self-levelling cleaning shoe		●	●
Pre-cleaning system		●	●
Opti-Clean™ cleaning system		●	●
Total sieve area under wind control	(m ²)	5.4	6.5
Remote control sieve setting		●	●
Cleaning fan			
Number of blades		6	6
Variable speed range	(rpm)	200 - 1050	200 - 1050
Double outlet fan		●	●
Electrical speed adjustment from the cab		●	●
Return system			
Double Roto-Thresher™ system		●	●
Returns indication on IntelliView™ IV monitor		●	●
Grain elevator			
High capacity grain elevator with heavy duty chain & flaps		●	●
Graintank			
Folding covers capacity standard/optional	(l)	9500/11500	12500
Central filling, folding bubble-up extension		●	●
Unloading auger			
Overtop unloading		●	●
Unloading speed standard / optional	(l/s)	126	126
Grain sample inspection door		●	●
Graintank fill warning device		●	●
Unloading auger swivel reach	(°)	105	105
Electrical			
12 volt alternator	(Amps)	190	190
Battery capacity	(CCA / Ah)	730 / 2x107	730 / 2x107
Engine*			
Compliant with engine emissions regulations			
Capacity	(cm ³)	8700	12900
Injection system		Common Rail	Unit injectors
Rated Engine Power	[kW/hp(CV)]	286/389	360/489
Maximum engine power	[kW/hp(CV)]	310/422	390/530
Electronic governor type		●	●
Fuel consumption measuring and read-out on IntelliView™ IV monitor		●	●
Air compressor		○	○
Engine blow off system		○	○
Fuel tank			
Diesel capacity	(l)	750	1000
Transmission			
Hydrostatic		●	●
Gearbox		4-speed	4-speed
Remote gearshifting		●	●
Differential lock		●	●
Powered rear wheels		○	○
Maximum speed Standard / Optional	(kph)	30 / 40	30 / 40
SmartTrax™ system		–	○
SmartTrax™ rubber tracks with Terraglide™ suspension		–	○
Residue management			
Integrated straw chopper		●	●
PSD™ (Positive Straw Discharge) belt		●	●
Remote adjustable deflectors		○	●
Remote chop / drop selection		○	○
Chaff spreader		○	○
Opti-Spread™ residue management		○	○
Weight			
Standard version on tyres, less header and less strawchopper	(kg)	17769	19623

● Standard ○ Optional – Not available * Developed by FPT Industrial

MODEL DIMENSIONS
CR7.90
CR9.80

	Tyres		Tyres		SmartTrax™	SmartTrax™ with Terraglide™ suspension	
With traction wheels / tracks**	710/70R42	900/60R38	800/70R32	900/60R38	24"	24"	28.5"
Ground contact area	(m ²)	–	–	–	1.4	1.49	1.77
Maximum height in transport position	(m)	3.97	3.90	4.00	3.97	3.97	3.99
Maximum width - transport	(m)	3.25	3.63	3.72	3.87	3.48	3.71
Maximum length with extended unloading tube without header***	(m)	9.97	9.97	9.97	9.97	9.97	9.97

** Traction wheels / tracks other than those mentioned are available: 710/70R42, 800/70R32, 800/75R32, 900/60R32, 900/60R38, 900/65R32/R2, 1050/50R32 and SmartTrax 24", 28.5", 30"

*** With 3ft extension and canvas

NEW HOLLAND. A REAL SPECIALIST IN YOUR AGRICULTURAL BUSINESS.



AT YOUR OWN DEALER



Visit our website: www.newholland.com
Send us an e-mail: international@newholland.com



The data indicated in this folder are approximate. The models described here can be subjected to modifications without any notice by the manufacturer. The drawings and photos may refer to equipment that is either optional or intended for other countries. Please apply to our Sales Network for any further information. Published by CNHI INTERNATIONAL SA. Communications & Advertising. Bts Adv. - 06/15 - (Turin) - AP5211N/INB

New Holland with



New Holland prefers **AMBRA** lubricants