

New Holland 38 Mower



Your growth, our technology.



The multi-purpose machine that keeps on delivering

Dampness and morning dew won't slow down mowing when you own a New Holland Model 38 Mower. Curved cutter-head paddles give added lift, so crop gets into the wagon even when it's moist. Paddles are adjustable to maintain paddle-to-band clearance for positive blowing action and reduced band wear. Heavy-duty rotor bearings, protected by special seals and lubricants, keep out moisture, dirt and debris. And, the rotor housing opens when you discharge materials on the ground. A useful feature when shredding and spreading cornstalks, mowing weeds or

clearing brush and stubble.

Built-in reliability


The cutterhead has individually adjustable knives that re chop the crop after it passes through the rotor flails for mowing. The Cutterhead can also be equipped with your choice of two, three or six knives. Rotor knives feature a staggered pattern to ensure an even, uniform crop flow. And micrometer-type knife holders make it easy to adjust the knives with the shear plate, so there's no need to loosen knife bolts.

Mows/Chops a variety of crops

The Model 38 is ideal for the farmer or rancher who cuts a variety of crops. Most often, it is used to mow/chop standing grass crops for daily green feeding. But it also works well when making bedding from cornstalks or straw, or shredding and spreading cornstalks for mulching. It mows weeds, clears small brush and stubble, and tops potatoes and beets. It even clips pastures and waterways, chops flax and cleans up rice stubble. When you need a multi-purpose machine that lives up to its name, look no further than a New Holland 38 Mower.

Specifications

- A. Four-foot horizontal and fifteen-inch vertical spout extensions let you tailor the spout to your crop conditions.
- B. Manual spout control directs materials into trailing wagons.
- C. Optional hydraulic lift brackets let you add a cylinder to control cutting height from the tractor seat.
- D. Tongue adjusts to four operating positions and two transport positions with rope-controlled shifter pin.
- E. Stone guard reduces the chance of objects being picked up and thrown forward towards operator.
- F. Heavy-duty screw-type jack takes the hard workout of hookup. The jack swings back and locks firmly in place on the tongue.
- G. Optional short flails let you adapt the mower for row-crop work.

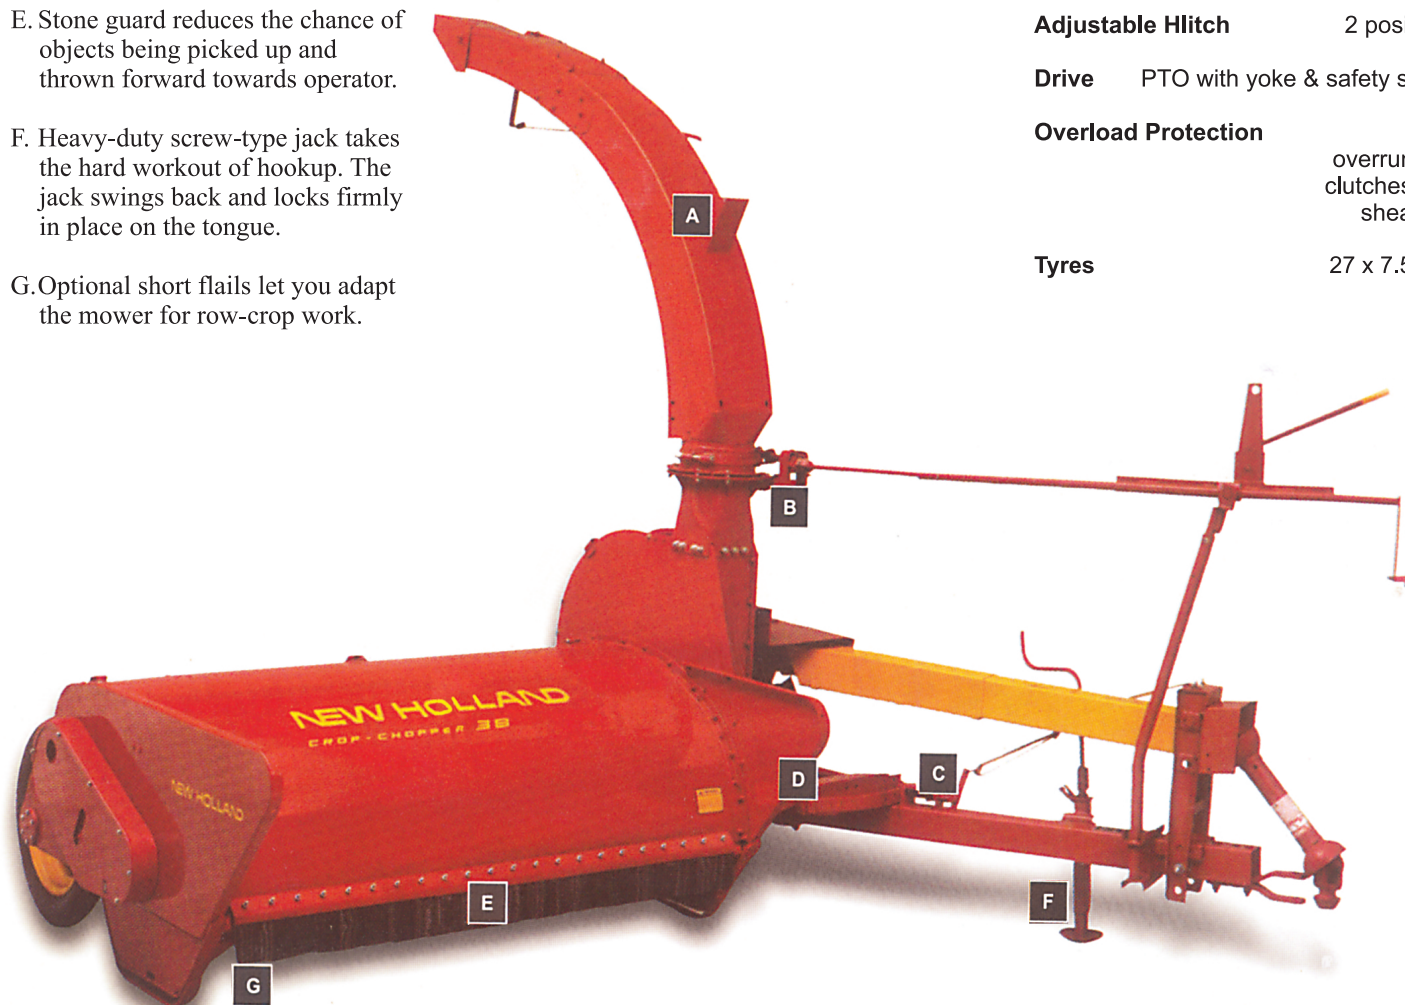

Width, in transport	9'8" (2.94m)
Width, in operation	10'10" (3.30m)
Height, overall	10'2" (3.09m)
Length, overall	10'4" (3.15m)
Weight	1,950 lbs. (885kg)
Cutting width	72" (1.83m)
Cutting height	2" to 7" (50 to 180mm)
Rotor speed	1,373 rpm
Rotor flails (mowing)	40
Cutterhead knives	3 standard: 2-3-6
Cutterhead paddles	cupped
Cutterhead speed	966 rpm
Number of paddles	3
Adjustable Hlitch	2 positions
Drive	PTO with yoke & safety shield
Overload Protection	Slip, overrunning clutches and shearbolt
Tyres	27 x 7.50-15

Leaf/38 Mower/Eng

New Holland Fiat (India) Pvt. Ltd.

Plant: Plot No. 03, Udyog Kendra, Greater Noida-201306, Distt. Gautam Budh Nagar
Uttar Pradesh, Ph: 0120-3056000, Fax: 0120-3056989
Website : www.newhollandindia.co.in

