

# POWERSTAR™ TRACTORS

PowerStar 75 | PowerStar 90 | PowerStar 100  
PowerStar 110 | PowerStar 120



# Utility, comfort, power and performance.

The PowerStar™ family of tractors provides unprecedented power, comfort and performance in a UTILITY tractor.

## Powerful efficiency and performance

Common-rail fuel-injection engines with four valves per cylinder deliver more power and torque to easily handle all your daily chores, while reducing your fuel bills and emissions. Every model meets stringent Tier 4 Final emissions requirements and reduces operating costs with New Holland's industry-leading 600-hour service interval.

## Five models from 74 to 117 engine horsepower

New Holland provides you with five PowerStar models to ensure you have the power required to easily tackle the task at hand, whether it's raking, tedding, mowing or baling in the field, rotary cutting the back acreage or stacking bales or handling other material with the front end loader. A choice of 2WD or 4WD, and a selection of shuttle transmissions further ensure there is a PowerStar tractor to perfectly match the jobs you do. Whatever model you choose, you are sure to experience an enhanced level of dependable performance from your PowerStar tractor during every task.



Model	Engine HP	PTO HP	Hydraulic Flow, gpm	3-Point Hitch Lift Capacity, lbs.
PowerStar 75	74	65	22 (19.8 w/mech shuttle)	3,664
PowerStar 90	86	73	26.6	5,620 / 9,700 optional
PowerStar 100	99	85	26.6	5,620 / 9,700 optional
PowerStar 110	107	93	26.6	5,620 / 9,700 optional
PowerStar 120	117	100	26.6	5,620 / 9,700 optional




### State-of-the-art comfort

The PowerStar family was designed around you, the operator, providing the comfort you need to operate all day long in all conditions. Choose the ultra-comfort Vision View™ cab or open platform ROPS platform. These operating platforms were designed in the virtual world for the realities of the real world, ensuring that operators of all shapes and sizes enjoy absolute comfort.

### Command Arc console

Whether you choose the VisionView cab or ROPS platform, the New Holland exclusive Command Arc console places controls along an arch to match your natural arm movements to increase your productivity and reduce fatigue. Never again will you feel like a contortionist in your own tractor. Detailed designs like these increase your operating productivity and reduce fatigue.

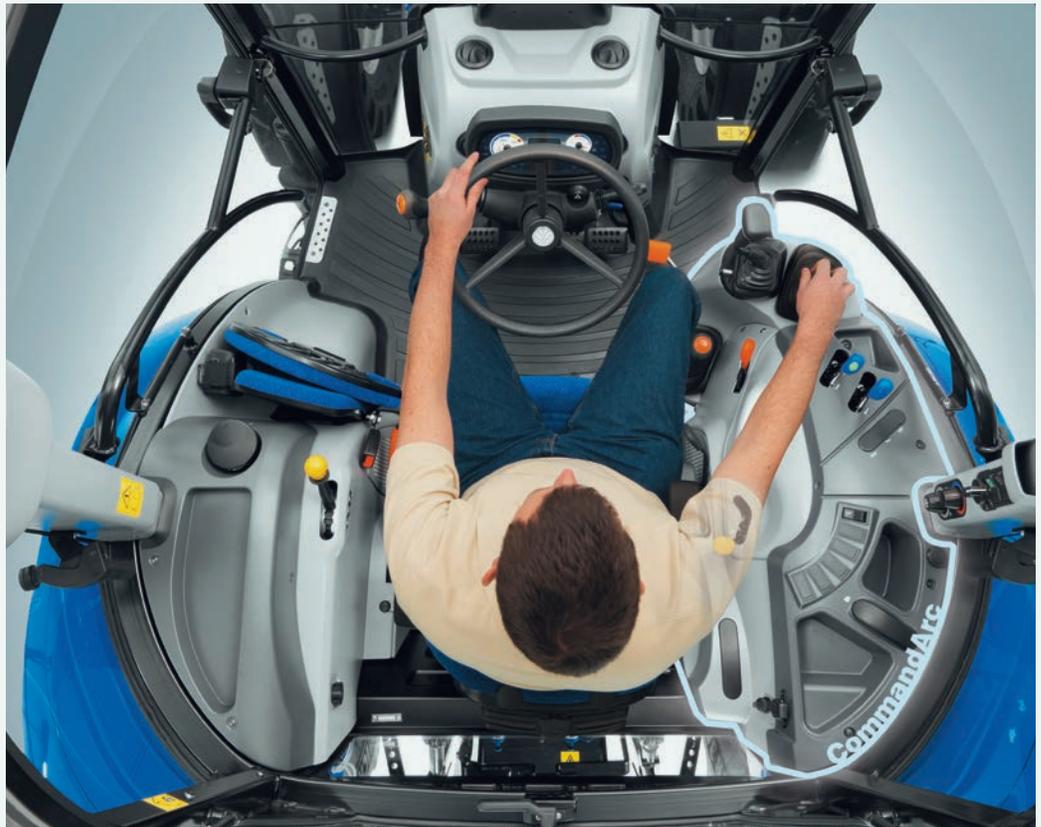

**POWERSTAR™ TRACTORS**

**75**

**90**


**100**

**110**

**120**

<b>Engine</b>						
Make		FPT F5D	FPT F5G	FPT F5G	FPT F5G	FPT F5G
Type		4-cylinder diesel	4-cylinder diesel	4-cylinder diesel	4-cylinder diesel	4-cylinder diesel
Displacement	cu. in. [L]	207 (3.4)	207 (3.4)	207 (3.4)	207 (3.4)	207 (3.4)
Gross engine horsepower		74	86	99	107	117
PTO horsepower		65	73	85	93	100
Emissions		Tier 4B DOC + Light CEGR	Tier 4B ECOBlue™ Compact HI-eSCR + Light CEGR			
<b>Transmissions</b>						
Standard		12X12 Power Shuttle				
<b>3-Point Hitch</b>						
Lift capacity @ 24"	lbs. [kg.]	3,664 (1662)	5,620 (2549)	5,620 (2549)	5,620 (2549)	5,620 (2549)
Optional rams @ 24"	lbs. [kg.]	—	9,700 (4,400)	9,700 (4,400)	9,700 (4,400)	9,700 (4,400)
<b>Hydraulics</b>						
Rear remotes - base		1, 2 or 3	2 or 3	2 or 3	2 or 3	2 or 3
Imp. pump - base	gpm [L/min]	12.5 (47.5)	16.9 (64)	16.9 (64)	16.9 (64)	16.9 (64)
Service pump - base	gpm [L/min]	9.5 (36)	9.7 (37)	9.7 (37)	9.7 (37)	9.7 (37)
<b>PTO</b>						
Base PTO RPM - 12x12		540	540	540	540	540/1000
Optional PTO RPM - 12x12		540/540E	540/1000	540/1000	540/1000	—
<b>Dimensions*</b>						
Weight - Cab/4WD	lbs. [kg.]	6,239 (2830)	8,157 (3700)	8,157 (3700)	8,157 (3700)	8,157 (3700)
Weight - Cab/2WD	lbs. [kg.]	5,622 (2550)	7,473 (3390)	7,473 (3390)	7,473 (3390)	7,473 (3390)
Weight - ROPS/4WD	lbs. [kg.]	5,952 (2700)	7,672 (3480)	7,672 (3480)	7,672 (3480)	7,672 (3480)
Weight - ROPS/2WD	lbs. [kg.]	5,027 (2280)	6,988 (3170)	6,988 (3170)	6,988 (3170)	6,988 (3170)
A Overall width	in. [mm]	75.6 (1922)	75.7 (1923)	75.7 (1923)	75.7 (1923)	75.7 (1923)
B Overall height - Cab roof	in. [mm]	97.9 (2486)	102.1 (2594)	102.1 (2594)	102.1 (2594)	102.1 (2594)
B Overall height - top of ROPS	in. [mm]	104.4 (2652)	106.5 (2706)	106.5 (2706)	106.5 (2706)	106.5 (2706)
C Overall length - 4WD	in. [mm]	151.0 (3836)	160.9 (4086)	160.9 (4086)	160.9 (4086)	160.9 (4086)
C Overall length - 2WD	in. [mm]	152.9 (3884)	163.1 (4144)	163.1 (4144)	163.1 (4144)	163.1 (4144)
D Front weights length	in. [mm]	10.1 (258)	10.3 (262)	10.3 (262)	10.3 (262)	10.3 (262)
E Wheelbase 4WD	in. [mm]	83.9 (2132)	89.9 (2285)	89.9 (2285)	89.9 (2285)	89.9 (2285)
E Wheelbase 2WD	in. [mm]	85.8 (2180)	92.2 (2343)	92.2 (2343)	92.2 (2343)	92.2 (2343)

— Not available \*Weights & dimensions with 16.9R30 rear tires (PowerStar 75) or 18.4R34 rear tires (PowerStar 90/100/110/120)

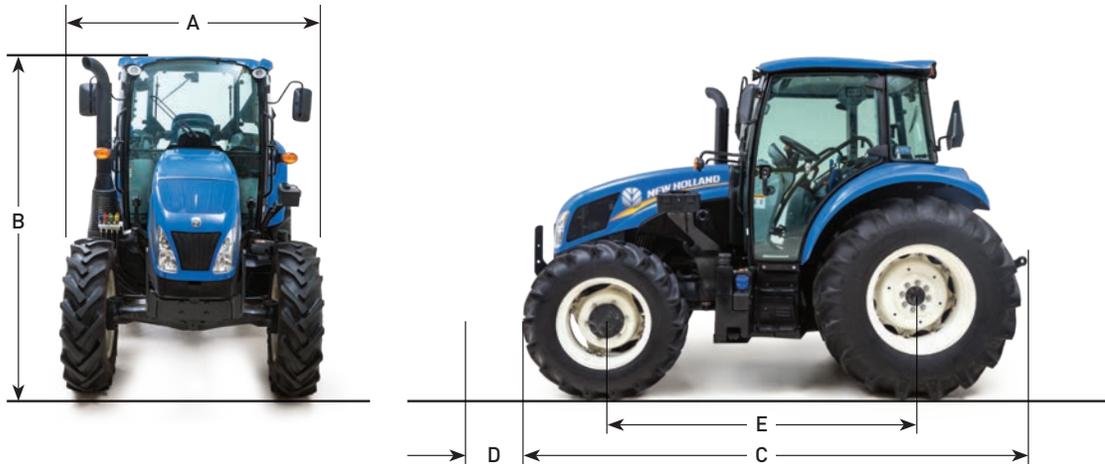

Learn more at [www.newholland.com](http://www.newholland.com)



Design, materials and/or specifications are subject to change without notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.

© 2020 CNH Industrial America LLC. All rights reserved. New Holland is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Any trademarks referred to herein, in association with goods and/or services of companies, other than owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates, are the property of those respective companies.



Safety begins with a thorough understanding of the equipment. Always make sure you and your operators read the Operator's Manual before using the equipment. Pay close attention to all safety and operating decals and never operate machinery without all shields, protective devices and structures in place.