


# PRECISION HOE DRILL

P2075




# Unmatched crop emergence for maximum yields.

The **new P2075 Precision Hoe Drill** features a design that is proven to maximize crop emergence, is easy to adjust, and delivers consistent seed-to-fertilizer placement so you enjoy faster planting, maximum yields and a higher return on your investment.

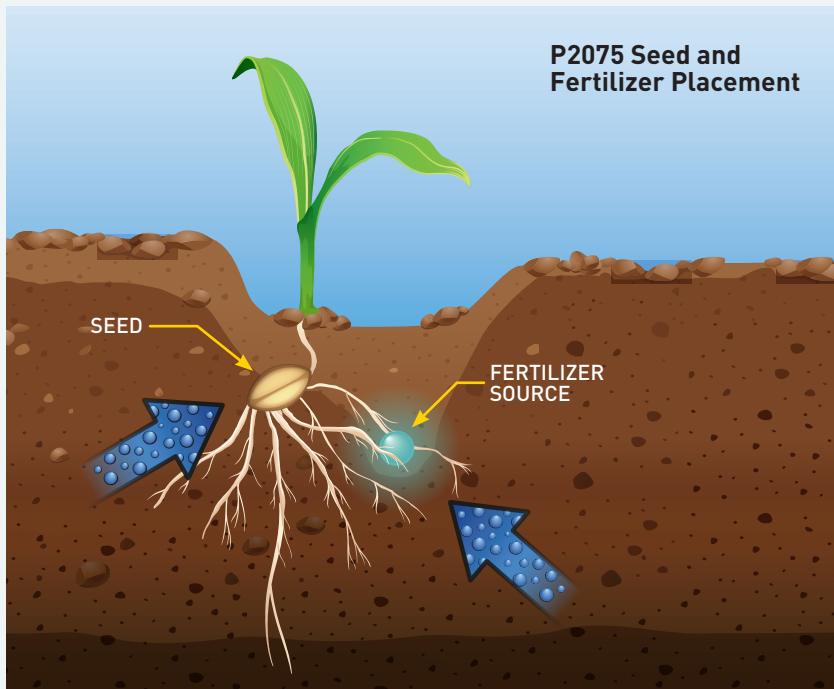



## Unmatched crop emergence due to optimum seed-to-fertilizer placement

The P2075 precisely places seeds at a consistent depth, with fertilizer placed in just the right spot for maximum nutrient uptake by the roots. Fertilizer is side-banded 1-7/8 inch to the side and 7/8 inch below the seed for the most effective seed/fertilizer separation for crop safety, but next to the roots, so roots don't have to search for the nutrient source. In addition, you avoid feeding weed populations between the rows. The final result: even plant population with consistent seed depth across the field.

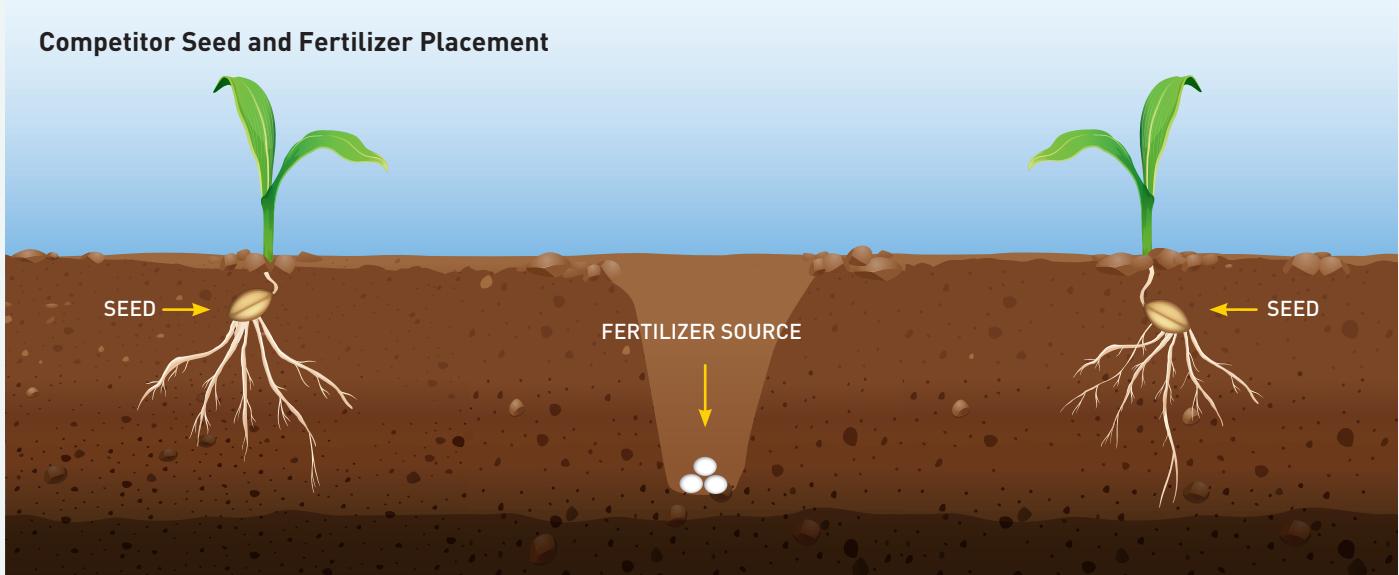

# Super-fast, no-tool depth adjustment with patented CAM design.

Now you can change seeding depth with one hand and no tools. The **new, patented cam adjustment** allows you to twist a knob on each row unit to change the seeding depth in 5 seconds per row unit. You are able to adjust depth across the entire machine in less than 10 minutes. That's time-saving productivity.

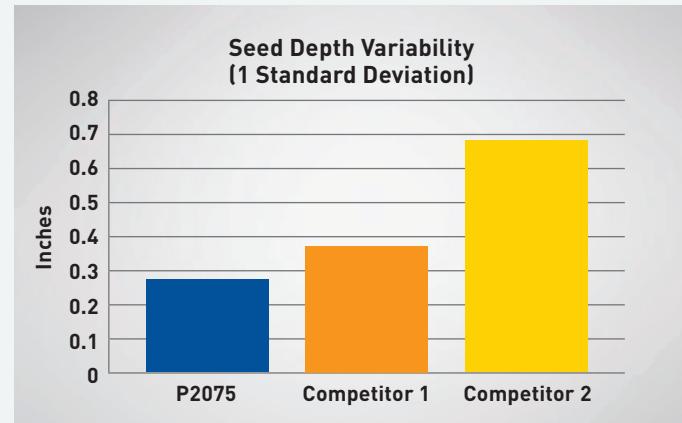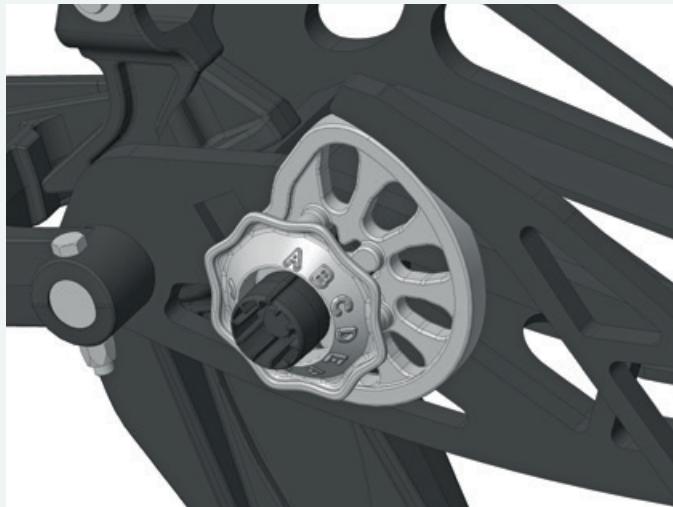


## The ideal seeding depth for you

The P2075 accommodates a wide range of crop seeding depths. You can adjust seeding depth from 0 to 2 inches with 3/16-inch adjustment increments to get ideal seed placement for your needs. You can adjust packing and trip pressure right from the cab and make micro seed depth adjustments for added convenience.




**Smooth ground following for precise seed placement in rough terrain.** Precise seed-to-fertilizer placement continues even when the P2075 travels over changing ground contours and uneven fields thanks to the **industry-leading parallel link row unit**. Its state-of-the-art design provides optimum ground following for consistent consistent row to row seed depth. The row unit frame is shorter than those you'll find on other drills for consistent and accurate seed depth. Individual row units travel more than 15 inches—8 inches up and 7 inches down — to follow the ground.

**P2075 Parallel Link** - As opener follows terrain, seed and fertilizer depth is more consistently maintained (accurate placement).

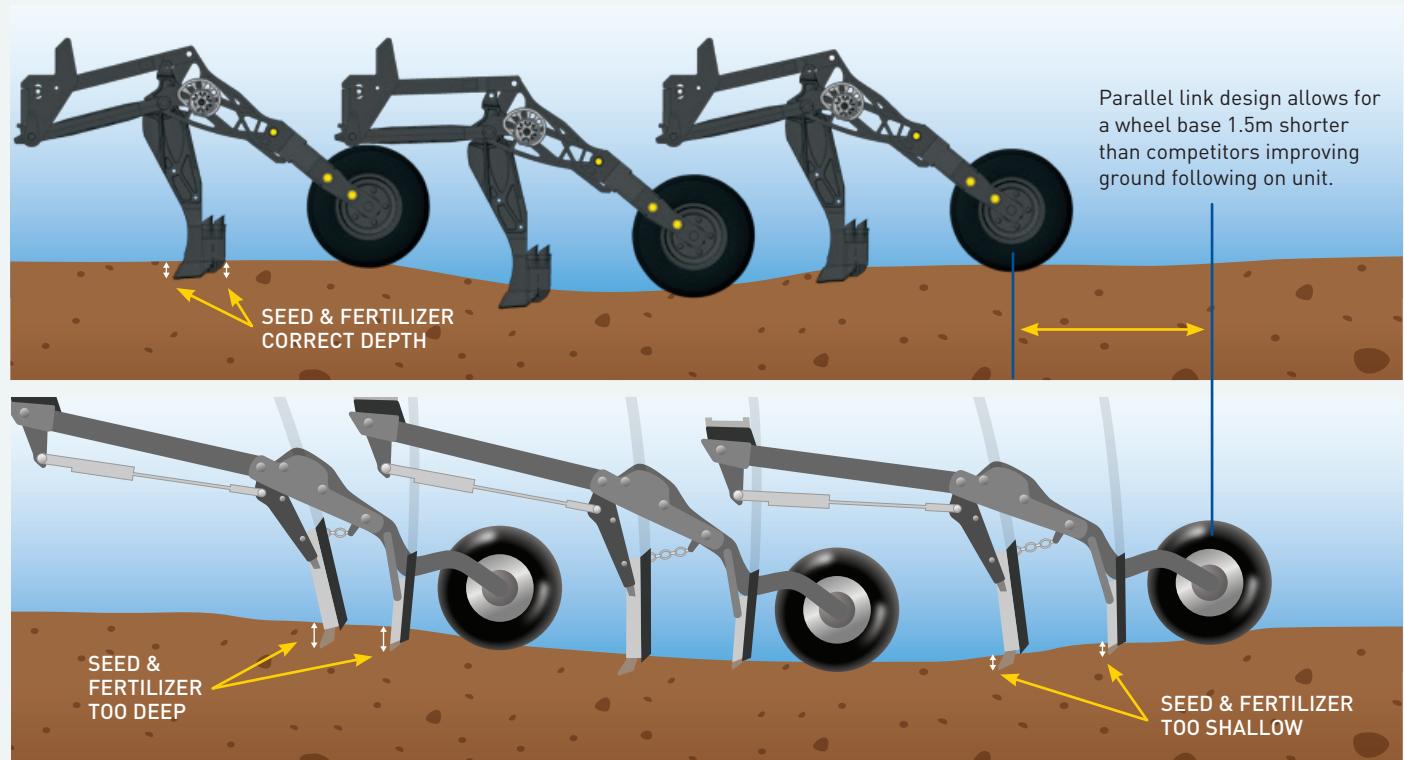

**Competitor Row Unit, Non-Parallel Link** - As opener follows terrain, seed and fertilizer depth varies (inaccuracy of placement). Machine frames have limited ground following ability (inaccuracy of placement).



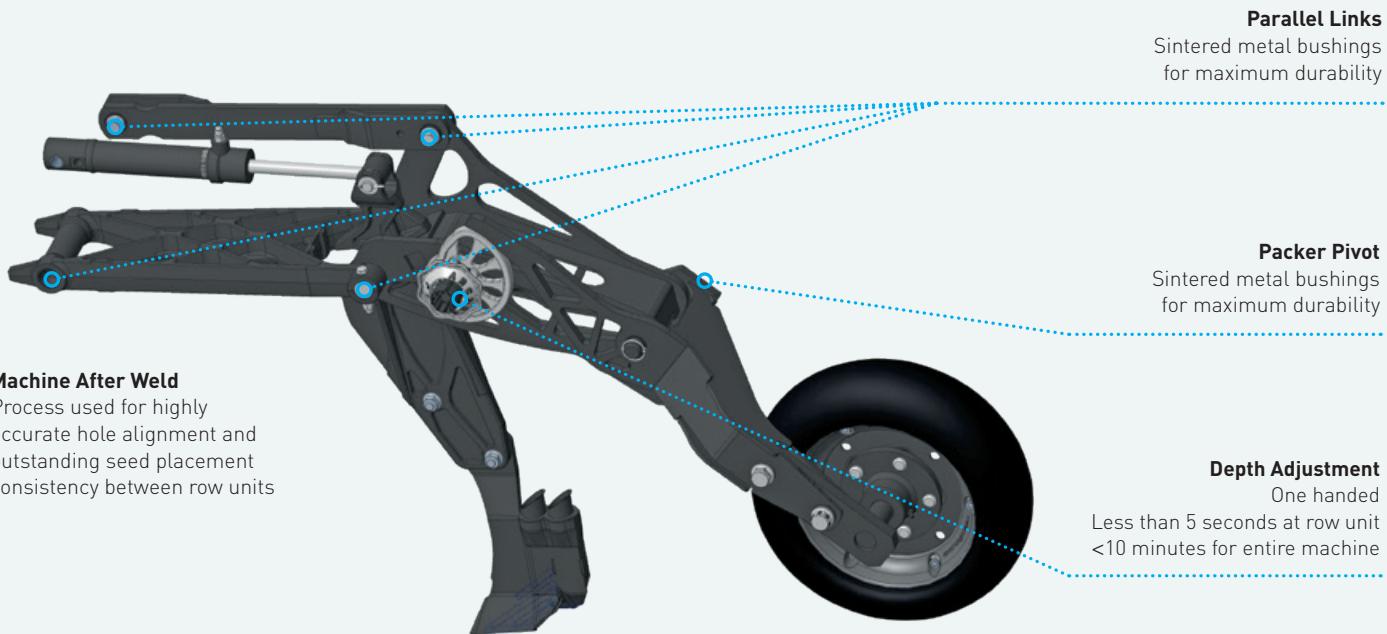

### Dependable, rugged construction

The manufacturing quality of the new P2075 parallel row units are built tough with machine after welding for improved durability and accuracy for more precise seeding depth from row to row. Sintered metal bushings in the parallel links and packer arm pivot add even more durability and serviceability.

### Save time with easy transport

The P2075 is big in field but compact when transporting between locations. The in-cab ISO BUS electro-hydraulic adjustment lets you fold the P2075 back for safe, easy transport and storage. In transport, the P2075 is compact to fit the envelope of your 4WD tractor, and a tight turning radius makes for easy maneuvering when using tow-behind air carts.



## P2075 PRECISION HOE DRILL SPECIFICATIONS

<b>Base size</b>	<b>50 (15.3)</b>	<b>60 (18.3)</b>	<b>70 (21.3)</b>	<b>80 (24.4)</b>
No. of sections	3	5	5	5
No. of ranks	3	3	3	3
<b>Working Widths (outside shank to outside shank + spacing)</b>				
10 (25.4) in. [cm]	ft. [m]	50 (15.3)	60 (18.3)	70 (21.3)
12 (30.5) in. [cm]	ft. [m]	50 (15.3)	60 (18.3)	70 (21.3)
<b>Number of Shanks</b>				
10 (25.4) in. [cm]		60	72	84
12 (30.5) in. [cm]		50	60	70
<b>Frame widths</b>				
Main frame	ft. [m]	10 (3.05)	10 (3.05)	10 (3.05)
Inner wing	ft. [m]	—	15 (4.57)	15 (4.57)
Outer wing	ft. [m]	20 (6.1)	10 (3.05)	15 (4.57)
Transport width	ft. [m]	18.4 (5.61)	18.4 (5.61)	18.4 (5.61)
Transport height (max.)	ft. [m]	16.6 (5.03)	16.6 (5.03)	16.6 (5.03)
<b>Base machine weights</b>				
10 in. (25.4 cm) spacing	lbs. [kg] est.	28,637 (13,017)	33,898 (15,408)	37,985 (17,266)
12 in. (30.5 cm) spacing	lbs. [kg] est.	27,592 (12,542)	32,646 (14,839)	36,526 (16,603)
<b>Tires</b>				
Main frame casters		11Lx15FI (Duals)	11Lx15FI (Duals)	11Lx15FI (Duals)
Inner wing casters		11Lx15FI (Duals)	11Lx15FI (Duals)	12.5Lx15FI (Duals)
Outer wing casters		11Lx15FI (Singles)	11Lx15FI (Singles)	12.5Lx15FI (Duals)
Rear transport wheels		11Lx15FI (Singles)	11Lx15FI (Singles)	12.5Lx15FI (Singles)
Packing		Individual on row	Individual on row	Individual on row
Standard pneumatic packers		Smooth profile 4.8x8	Smooth profile 4.8x8	Smooth profile 4.8x8
Optional semi-pneumatic packers		Smooth profile 4.8x8	Smooth profile 4.8x8	Smooth profile 4.8x8
Openers		Double shoot, side band (2" lateral, 1" vertical separation)		
Air package		EZ Flow single or double shoot		
Blockage monitor		Basic or expanded IntelligentAg Wireless Flow Blockage System		
Tandem wheels for center		Standard; high flotation 12.5Lx15FI available		Standard; high flotation 340/60R15 available
Tandem wheels for inner wing		Standard; high flotation 12.5Lx15FI available		Standard; high flotation 340/60R15 available
Tandem wheels for outer wing		N/A; high floatation available Option; high floatation 12.5Lx15FI available		Standard; high flotation 340/60R15 available
Trip assemblies 10 in. (25.4 cm)		Fully adjustable from 275-550 lbs.		
Trip assemblies 12 in. (30.5 cm)		Fully adjustable from 275-550 lbs.		
Rank to rank spacing	in. [cm]	39 (99)	39 (99)	39 (99)
Frame/ground clearance	in. [cm]	30 (76.2)	30 (76.2)	30 (76.2)
Hydraulic system		High-quality cylinders performing both depth and wing lift functions		
Depth control		Individual opener depth control		
Safety chains and lights		●	●	●
Transport locks		●	●	●
Rear tow hitch		Standard auxillary hitch	Standard auxillary hitch	Standard auxillary hitch
Packing pressure adjustment		ISO BUS 11783 In cab electronic adjustment of packing pressure		

● Standard — Not available

Learn more at [www.newholland.com](http://www.newholland.com)

Design, materials and/or specifications are subject to change without notice and without liability therefor. Specifications are applicable to units sold in Canada, the United States, its territories and possessions, and may vary outside these areas.

© 2021 CNH Industrial America LLC. All rights reserved. New Holland is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Any trademarks referred to herein, in association with goods and/or services of companies, other than owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates, are the property of those respective companies.

Safety begins with a thorough understanding of the equipment. Always make sure you and your operators read the Operator's Manual before using the equipment. Pay close attention to all safety and operating decals and never operate machinery without all shields, protective devices and structures in place.



NH111021827 • 0821 • OTP • PRINTED IN U.S.A.