

MINI ATTACHMENTS CII UNIVERSAL COUPLER

YOU GOT THE MACHINE, NOW GET THE ATTACHMENTS YOU NEED TO GET THE JOB DONE!





ATTACHMENTS TO HELP YOU GET THE JOB DONE.

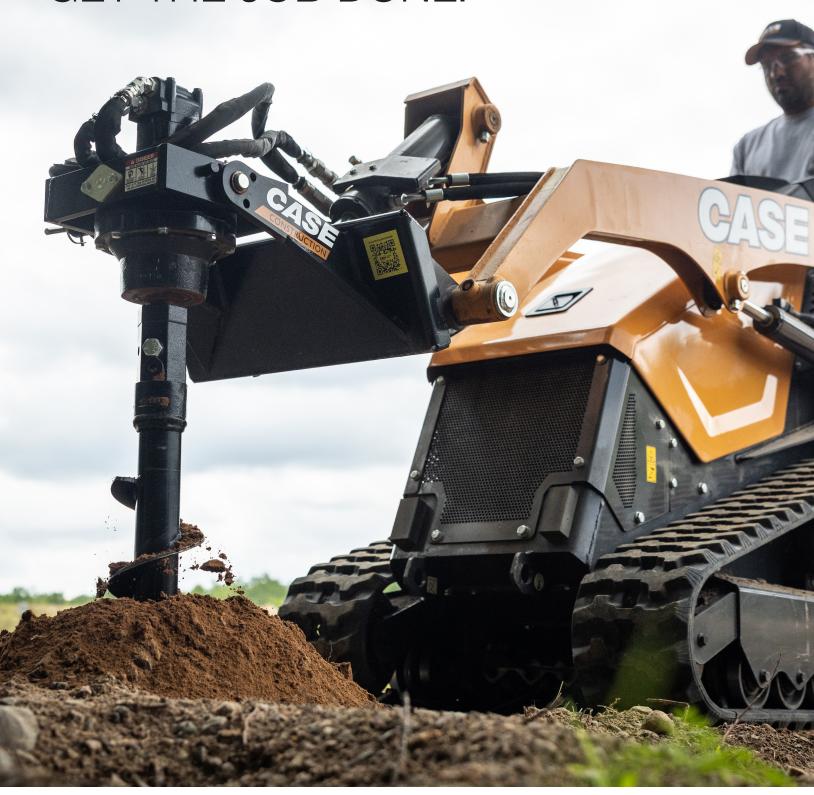





TABLE OF CONTENTS

Mini Angle Broom	4
Mini Angle Broom	5
Mini Brush Mower	6
Mini Combo Bucket	7
Mini Dozer Blade	8
Mini Grapple Bucket	9
Mini Grapple Rake	10
Mini Grapple Rod Bucket	11
Mini Hydraulic Hammer CH-2M	12
Mini Landplaner	13
Mini Landscape Rake	14
Mini Light Material Blade	15
Mini Low Profile Bucket	16
Mini Pallet Forks	17
Mini Pick-Up Broom	18
Mini Rod Bucket	19
Mini Skid Hitch	20
Mini Snowblower	21
Mini Snow Bucket	22
Mini Soil Conditioner	23
Mini Stump Grinder	24
Mini Tiller	25
Mini Tree Spade	26
Mini Trencher	27
Mini V-Plow	28

Note: Attachments not shown in the booklet:

- AugersAuger Bits

Additional Mini Attachments with CII Coupler will be coming soon

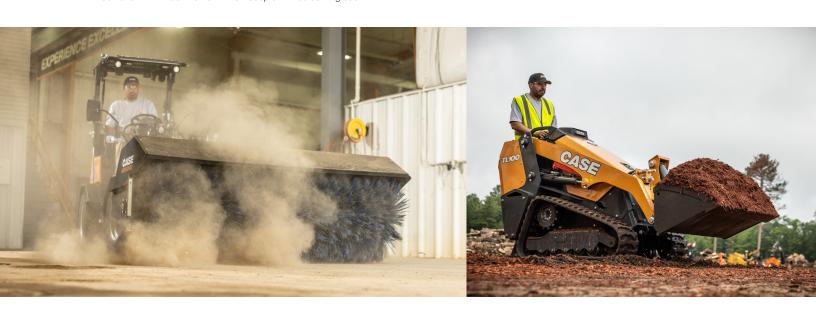

MINI ANGLE BROOM

THIS ATTACHMENT IS DESIGNED TO GO ANYWHERE TO GET THE JOB DONE.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

MANUAL

- + Direct-drive design
- + Power angling (optional)
- +Angles 25° to the right and left
- + Storage stands come standard
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal mounting plate

- + General construction
- + Landscaping
- + Hobby farming
- + Property management
- + Street cleaning
- +Sidewalk clean-up
- + Jobsite clean-up
- +Snow removal



MODEL	48" MINI 100% POLY - MANUAL	48" MINI POLY/STEEL - MANUAL
Part Number	91876067	91876068
Weight	325 lb.	325 lb.
Working Width	48"	48"
Width Fully Angled	43.5" @ 25* Angle	43.5" @ 25* Angle
Broom Angling	25°	25°
Bristle Diameter	24"	24"
Rated Flow	7-17 GPM	7-17 GPM
Operating psi	2,000 - 3,000 psi	2,000 - 3,000 psi
Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate





MINI ANGLE BROOM

HYDRAULIC

THIS ATTACHMENT IS DESIGNED TO GO ANYWHERE TO GET THE JOB DONE.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Direct-drive design
- +Power angling
- +Angles 25° to the right and left
- +Storage stands come standard
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal mounting plate

- + General construction
- +Landscaping
- + Hobby farming
- + Property management
- +Street cleaning
- +Sidewalk clean-up
- + Jobsite clean-up
- +Snow removal



MODEL	48" MINI 100% POLY - HYDRAULIC	48" MINI POLY/STEEL - HYDRAULIC
Part Number	91876065	91876066
Weight	325 lb.	325 lb.
Working Width	48"	48"
Width Fully Angled	43.5" @ 25* Angle	43.5" @ 25* Angle
Broom Angling	25°	25°
Bristle Diameter	24"	24"
Rated Flow	7-17 GPM	7-17 GPM
Operating psi	2,000 - 3,000 psi	2,000 - 3,000 psi
Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate



MINI BRUSH MOWER

STANDARD

THE MINI ROTARY BRUSH MOWER HAS BEEN ENGINEERED FOR RUGGED DURABILITY, SAFETY, AND EASE OF OPERATION.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- +Cuts moving forward and reverse
- + Hydraulic motor with pressure relief operates both directions
- + No shear pins or drive clutches
- + Dual-edge cutting blades for longer life
- + Cut, clear, and mulch unwanted brush, thickets, grass, and saplings up to 2" in diameter
- + Open front deck design allows for blades to start cutting a sapling without needing to push it over first
- + Break new trails, clear ditches, construction property sites, and other overgrown areas
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate

- + Landscaping
- + Hobby farming
- + Property management
- + Roadside maintenance
- +Right-of-way maintenance

- +Trail creation and maintenance
- + Fence line maintenance
- + Fire control
- +Site preparation

MODEL	44" MINI BRUSH MOWER
Part Number	91876069
Weight	420 lb.
Overall Height	17.75"
Overall Length	62"
Deck Length	53.5"
Overall Width	48.25"
Cutting Width	43.75"
Deck Thickness	7 gauge (.179)
Rated Flow	10-16 GPM
Mounting Plate	Universal CII Mounting Plate





MINI COMBO BUCKET

4-IN-1

THIS MULTIPURPOSE BUCKET DOES IT ALL – DOZING, GRAPPLING, LEVELING, DIGGING, LOADING, AND DUMPING.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- +2 3,000 psi hydraulic cylinders
- + Grade 50 steel with side stiffeners nearly 40% stronger than regular steel
- + Bucket bottom and clamshell are reinforced
- +Optional bolt-on cutting edge
- + Multitasking bucket keeps you productive
- + Great for site cleanup, scraping, and brush removal
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate



- + Demolition
- + General construction
- + Municipal jobs

- + Landscaping
- + Agriculture
- + Hobby farming

MODEL	48" MINI 4-IN-1 BUCKET
Part Number	91876078
Weight	330 lb.
Overall Width	49.5"
Overall Height	20.5"
Overall Length	34"
Grapple Opening	18.5"
Cutting Edges (Qty)	3 - 1/2" × 4"
Struck Capacity	4.75 ft³
Steel Thickness of Bucket	25"
Hydraulic Cylinders	2" × 4" (2)
Mounting Plate	Universal CII Mounting Plate



MINI DOZER BLADE

SIX WAY

THIS DOZER, GRADER, AND LEVELER IS AN ALL-IN-ONE PACKAGE.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Adjustable skid shoes for control of cutting depth
- +Bolt-on cutting edge
- +Standard with hydraulic angling
- + Not recommended for snow removal due to no trip moldboard
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate

- + Demolition
- + Construction
- + Municipal jobs
- + Landscaping
- + Rough and finish grading as well as light dozing



MODEL	50" DOZER BLADE - HYDRAULIC
Part Number	91876079
Weight	265 lb.
Angling	Hydraulic
Overall Width	49.5"
Overall Height	21.25"
Overall Length	28.25"
Side Angle (both ways)	25°
Tilt Angle (both ways)	10°
Cutting Edge	1/2" × 4"
Tilt Cylinder	2" × 4"
Angle Cylinder (optional)	2" × 4"
Mounting Plate	Universal CII Mounting Plate









MINI GRAPPLE BUCKET

STANDARD

THIS IS A VERSATILE TOOL FOR MOVING SAND, DIRT, ROCKS, MUD, BRUSH, LOGS, AND OTHER MATERIAL.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Move difficult to handle material, such as scrap and waste, quickly and easily
- +2 independent cylinders
- + Grapples open to approximately 27"
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate

- + Demolition
- + General construction
- + Municipal jobs
- + Landscaping
- + Agriculture
- + Hobby farming
- + Debris clean-up
- + Move sand, dirt, rocks, mud, brush, and logs
- + Accommodates a variety of shaped materials

Saddi (OAL)	9	
		n
0		
CASE		

MODEL	50" MINI GRAPPLE BUCKET
Part Number	91876080
Weight	295 lb.
Overall Width	49.75"
Overall Height	20.41"
Overall Height w/teeth open	30" approx
Maximum Opening	27" approx
Mounting Plate	Universal CII Mounting Plate



MINI GRAPPLE RAKE

STANDARD

THE STRENGTH OF THE MINI GRAPPLE RAKE ALLOWS YOU TO PICK UP A VARIETY OF DEBRIS, FROM LOGS AND BRUSH TO ROCKS AND CONCRETE.


FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Grade 50 steel teeth nearly 40% stronger than regular
- +1 3,000 psi hydraulic cylinder
- + Curved teeth allow the grapple to glide over the ground, raking and cleaning the surface without damaging it
- + Clear brush, pick rocks, and mulch
- + Raking and piling, storm cleanup and demolition
- +Use as a root rake and for back dragging
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate



- + Demolition
- + Construction
- + Municipal jobs
- + Landscaping
- + Farming
- +Clear brush, small logs, pick rocks, and mulch
- + Ripping up roots
- + Raking and piling
- +Storm clean-up
- +Site clean-up
- + Agriculture



MODEL	48" MINI GRAPPLE RAKE
Part Number	91876074
Weight	375 lb.
Overall Width	48.63"
Width Between Teeth	6.38"
Height w/Teeth Closed	27"
Maximum Height w/Teeth Open	37.25"
Maximum Opening	36"
Hydraulic Cylinder	2.5" × 6"
Grapple Teeth (upper)	7
Grapple Teeth (lower)	8
Mounting Plate	Universal CII Mounting Plate



©2023 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Genuine Parts is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Any trademarks referred to herein, in association with goods and/or services of companies other than CNH Industrial America LLC., are the property of those respective companies. www.casece.com





MINI GRAPPLE ROD BUCKET

STANDARD

THE MINI GRAPPLE ROD BUCKET IS THE PERFECT PIECE OF EQUIPMENT TO DIG OR ROOT OUT AND GRAB DIFFICULT MATERIAL, WHILE SIFTING OUT UNWANTED DEBRIS.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Grade 50 steel nearly 40% stronger than regular steel
- +2 3,000 psi hydraulic cylinders
- + Rugged tool great for landscaping, demolition, roots, brush, debris, and other difficult-to-grasp material
- + Designed for digging through the dirt to pick up unwanted material and leaving dirt behind
- + Excellent tool for digging and pulling out materials from demolition work
- +Clearing, combing, grooming and screening material
- + Clear, dig, extract, grab, and sift all-in-one tool
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate



- + Demolition
- + Construction
- + Municipal Jobs
- + Landscaping

- + Farming
- + Clearing rocks, brush, and other debris
- +Storm clean-up
- + Agriculture

MODEL	48" MINI GRAPPLE ROD BUCKET
Part Number	91876081
Weight	330 lb.
Overall Width	49.75"
Width Between Rods	2.75"
Width Between Lower Teeth	14.25"
Height w/Teeth Closed	20.75"
Height w/Teeth Opened	30"
Maximum Opening	27"
Hydraulic Cylinders	2" × 4" (2)
Digging Teeth Lower (Qty)	4
Mounting Plate	Universal CII Mounting Plate





MINI HYDRAULIC HAMMER CH-2M

STANDARD

CASE HYDRAULIC BREAKERS DELIVER EXCEPTIONAL IMPACT ENERGY, LONG LIFE AND LOW OPERATING COSTS.

FOR USE ON: Mini Track Loader (MTL) and Small Articulated Loader (SAL)

FEATURES:

- + Innovative blend of simple yet efficient design and advanced "Accumulator Free" technology
- + Featuring only two moving parts and few seals, CASE breakers offer more up-time along with simple in-the-field maintenance when a repair is required. The CASE breaker will get you back on the job quickly and at a reasonable cost.
- + Breakers are not sensitive to system back pressure
- +Can be powered by a wide variety of machines with an innovative side plate and bracket system and a simple pin and bushing change
- + Using a low pressure nitrogen charge, the CASE breaker cushions every blow. This reduces wear and tear on the carrier and adds to operator comfort.

APPLICATIONS:

+Construction +Municipal jobs

+ Landscaping

+ Site preparation

+ Hardscaping

+ Recycling

+ Demolition

MODEL	CH-2M MSSL-D
Part Number	92153414
Impact Energy Class: ft-lb	250 (339)
Impact Frequency: bpm	600-1150
Working Weight	
1pc Top Mount Type - lb. (kg.) 2pc Top Mount Type - lb. (kg.) Box Bracket - lb. (kg.)	242 lb. (110 kg.) - 364 lb. (165 kg.)
Operating Pressure: PSI	1160-2175
Operating Pressure: MPA	8-15
Oil Flow: GPM	5.3-9.2
Oil Flow: L/Min	20-35
Chisel Diameter - inch (mm)	2.0 (50)
Hose Size - inch	1/2
Base Carrier - metric ton	1.5-2.5
Manufacturer	Toku
Mounting Plate	Universal CII Mounting Plate



PM-23339 Issued: 09/2023 Replaces: None







MINI LANDPLANER

STANDARD

THIS AGGRESSIVE, MULTI-PURPOSE, AFFORDABLE LAND PLANER/LEVELER IS THE PERFECT SOLUTION FOR SITE PREPARATION.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- $+\frac{1}{2}$ " \times 4" front and rear cutting edges allow forward and backward operation
- +Center bars aid in leveling and can be used to haul material
- + Great visibility of the front and rear cutting edges
- + Includes (6) 1/2" thick scarifier shanks cut 4" deep in reverse and float while traveling forward
- +Scarifier can be pinned up and out of the way when not in use
- +Plug & Play Ready: Includes universal CII mounting plate



- + Construction
- + Municipal jobs
- + Landscaping
- + Farming

- + Leveling dirt ground
- +Site clean-up
- +Site prep

MODEL	48" MINI LANDPLANER
Part Number	91876082
Weight	223 lb.
Width	49.5"
Length	43"
Height	16"
Cutting Edge	1/2" × 4" (2)
Mounting Plate	Universal CII Mounting Plate

MINI LANDSCAPE RAKE

STANDARD

THE MINI LANDSCAPE RAKE WAS DESIGNED TO REMOVE SMALL TO MEDIUM-SIZED ROCK AS SMALL AS 3/4" ALONG WITH UNWANTED ROOTS AND DEBRIS.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Picks up material as small as 3/4"
- + Adjustable side skids for setting depths
- + Exclusive replaceable bolt-on rake bars
- + Rake bars scarify and level while breaking up lumpy soil and picking up rocks
- +Top cover opens for easy dumping
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate

APPLICATIONS:

- + Construction
- + Municipal jobs
- + Landscaping
- + Farming



- + Rock removal
- + General soil preparation



MODEL	48" MINI LANDSCAPE RAKE
Part Number	91876083
Weight	860 lb.
Working Width	48"
Overall Height	27"
Quantity of Tooth Bars	11 (Bolt-On)
Quantity of Teeth Per Unit	308
Hydraulic Motor Flow Range	13-25 GPM
Skid Shoes	3 Position Adjustable
Construction of Teeth	7 Gauge Steel
Mounting Plate	Universal CII Mounting Plate

PM-23258 Issued: 06/2023 Replaces: None







MINI LIGHT MATERIAL BLADE

STANDARD DUTY

PERFECT IN THE WINTER FOR REMOVING SNOW FROM WALKS, DRIVEWAYS, OR PARKING LOTS. USE IT IN THE SPRING, SUMMER, AND FALL FOR LIGHT MATERIAL GRADING.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- +21.5" curved moldboard
- +Strong, high-carbon steel cutting edge for long life
- + Moldboard has two (2) trip springs for component protection
- + Easy adjust depth shoes
- +27° left/right hydraulic angling
- + Hydraulic angling
- +Locking trip design for light material grading and all season use
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate



- + Construction
- + Municipal jobs
- + Landscaping
- + Farming



+ Driveways

+Light material grading



MODEL	48" MINI LIGHT MATERIAL BLADE	60" MINI LIGHT MATERIAL BLADE
Part Number	91876075	91876076
Weight	220 lb.	260 lb.
Angling	Hydraulic	Hydraulic
Overall Width	49.5"	61.5"
Working Width (fully angled)	44.0"	54.5"
Overall Height	21.5"	21.5"
Overall Length	28.25"	28.25"
Side Angle (both ways)	27°	27°
Tilt Angle (both ways)	10°	10°
Trip Type	Moldboard	Moldboard
Trip Springs	2	2
Cutting Edge	1/2" × 4"	1/2" × 4"
Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate



MINI LOW PROFILE BUCKET

STANDARD

THE MINI LOW PROFILE BUCKET HAS A LOWER BACK AND LONGER BOTTOM TO PROVIDE YOU THE BEST VISIBILITY FOR SCRAPING SURFACES AND PICKING UP MATERIAL. THESE BUCKETS ARE BUILT TO THE HIGHEST STANDARDS OF QUALITY.

FOR USE ON: Mini Track Loader (MTL) and Small Articulated Loader (SAL)

FEATURES:

- + Grade 50 steel side stiffeners, nearly 40% stronger than regular steel
- + Optional bolt-on cutting edge
- + High-carbon cutting edge
- + Plug & Play Ready: Includes universal CII mounting plate

- + Construction
- + Hobby farming
- + Property management
- + Landscaping



MODEL	36" LOW PROFILE MINI BUCKET	42" LOW PROFILE MINI BUCKET	48" LOW PROFILE MINI BUCKET
Part Number	92092827	92092828	92092829
Weight	155 lb.	165 lb.	175 lb.
Dimensions (w \times h \times l)	37.75" × 15.75" × 32"	43.75" × 15.75" × 32"	49.75" × 15.75" × 32"
Cutting Edge	1/2" × 4"	1/2" × 4"	1/2" × 4"
Struck Capacity	4.0 cu. ft.	4.6 cu. ft.	5.3 cu. ft.
Heaped Capacity	5.0 cu. ft.	5.8 cu. ft.	6.8 cu. ft.
Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate

MODEL	BOLT-ON CUTTING EDGE 1/2 × 4 × 37.5	BOLT-ON CUTTING EDGE 1/2 × 4 × 43.5	BOLT-ON CUTTING EDGE 1/2 × 4 × 49.5
Part Number	92118207	92118209	92058050





MINI PALLET FORKS

STANDARD

MINI PALLET FORKS ARE VITAL FOR ANY INDUSTRY WHERE BULK BALES OR PALLETIZED MATERIALS ARE MOVED.

FOR USE ON: Mini Track Loader (MTL) and Small Articulated Loader (SAL)

FEATURES:

- +Adjustable width from 8" to 43.5"
- +Quick and easy movement of forks to desired width
- +Brick guard is standard equipment
- +Plug & Play Ready: Includes universal CII mounting plate

- + Construction
- + Hobby farming
- + Property management
- +Landscaping
- + Municipal jobs



MODEL	MINI PALLET FORKS 42"	MINI PALLET FORKS 48"
Part Number	92092826	92070376
Mount	Welded	Welded
Lift Capacity	2,500 lb.	2,500 lb.
Fork Length	42"	48"
Weight	285 lb.	305 lb.
Overall Width	43.5"	43.5"
Overall Height	28.875"	28.875"
Frame Depth	8.75"	8.75"
Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate





MINI PICK-UP BROOM

POLY - POLY/STEEL

SWEEP CLEAN AND SCRAPE MUD GOING FORWARD OR IN REVERSE.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Direct-drive design
- + Adjustable arbor allows control over bristle pressure to surface while extending bristle life
- + Replaceable bristles wafers
- + Completely covered to control dust. Ideal for warehouses, machines sheds, parking lots, job sites, etc. where dust containment is a must!
- + Reversible bristle direction for sweeping backwards
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate



- + Construction
- + Industrial
- + Municipal jobs
- + Hobby farming



- + Light street sweeping
- +Sidewalk cleaning



MODEL455	45" MINI 100% POLY	45" MINI POLY/ STEEL
Part Number	91876085	91876086
Operating Weight	440 lb.	440 lb.
Working Width	45"	45"
Overall Width	57"	57"
Overall Height	25"	25"
Bristle Diameter	24"	24"
Cutting Edge Specs	1/2" × 4" bolt-on	1/2" × 4" bolt-on
Drive System	Direct-drive Hydraulic Motor	Direct-drive Hydraulic Motor
Rated Flow	7-15 GPM	7-15 GPM
Operating psi	2,000 - 3,000 psi	2,000 - 3,000 psi
Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate





MINI ROD BUCKET

STANDARD

GREAT FOR DIFFICULT-TO-GRASP MATERIALS LIKE ROOTS, BRUSH, AND OTHER DEBRIS.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Grade 50 steel nearly 40% stronger than regular steel
- + Rugged tool great for landscaping and demolition
- + Designed for digging out materials from demolition work
- +Combing and grooming the ground screening material
- +Plug & Play Ready: Includes universal CII mounting plate

- + Landscaping
- + Farming
- + Municipal jobs
- + Demolition
- + Property management
- + Site preparation
- +Site clean-up



MODEL	48" MINI ROD BUCKET
Part Number	91876087
Weight	200 lb.
Overall Width	49.75"
Width Between Rods	2.75"
Width Between Lower Teeth	14.25
Digging Teeth Lower (Qty)	4
Mounting Plate	Universal CII Mounting Plate



MINI SKID HITCH

STANDARD

THE SKID STEER HITCH MINI IS A MUST HAVE ATTACHMENT FOR THE BUSINESS, FARM, OR INDIVIDUAL OPERATOR.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Move equipment quickly without breaking your back
- + Direct and guide into tight quarters
- +Plug & Play Ready: Includes universal CII mounting plate

- + Landscaping
- + Farming
- + Municipal jobs
- + Demolition
- + Property management
- + Site preparation



MODEL	MINI SKID HITCH
Part Number	91876088
Weight	40 lb.
Maximum Tongue Weight	1,000 lb.
Gross Trailer Weight	3,000 lb.
Height	10"
Width	24"
Receiver Length	10"
Weight	40 lb.
Overall Width	35.38"
Shipping Weight	90 lb.
Mounting Plate	Universal CII Mounting Plate





MINI SNOWBLOWER

STANDARD

THE MINI HYDRAULIC SNOW BLOWER CAN CAST SNOW UP TO 30 FEET.

FOR USE ON: Mini Track Loader (MTL) and Small Articulated Loader (SAL)

FEATURES:

- + Replaceable bolt-on high-carbon steel cutting edge
- + Hydraulic control valve with electric solenoid controls all chute functions
- + No-freeze-up chute design seals out snow and freezing slush (comes standard)
- + Hydraulic chute rotation allows choice of casting direction
- + High-carbon steel cutting edge comes standard
- + Plug & Play Ready: Includes proper hoses lengths, quick disconnects, wire harness, and universal CII mounting plate

APPLICATIONS:

- +Construction
- + Hobby farming
- +Property management

- +Snow removal
- + Municipal jobs
- +Clearing snow from driveways, alleys and sidewalks



MODEL	48" STANDARD FLOW (11-16 GPM)	55" STANDARD FLOW (11-16 GPM)	61" STANDARD FLOW (11-16 GPM)
Part Number	92092817	92092818	92092819
Stage	2	2	2
Width of Cut	48"	55"	61"
Cutting Height	29"	29"	29"
Cutting Edge	5/8" × 6" bolt-on	5/8" × 6" bolt-on	5/8" × 6" bolt-on
Auger Diameter	16" open flight	16" open flight	16" open flight
Fan Diameter	20" 4-blade	20" 4-blade	20" 4-blade
Chute Rotation	Hydraulic 270°	Hydraulic 270°	Hydraulic 270°
Pressure Relief	Auger	Auger	Auger
Casting Distance	Up to 30'	Up to 30'	Up to 30'
Shipping Weight	652 lb.	700 lb.	725 lb.
Hoses	Included	Included	Included
Hydraulic Flow	11-16 GPM	11-16 GPM	11-16 GPM
Operating Pressure	2,500-3,500 psi	2,500-3,500 psi	2,500-3,500 psi
Skid Shoes	Standard	Standard	Standard
Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate

PM-23305 Issued: 07/2023 Replaces: None



MINI SNOW BUCKET

STANDARD

THE MINI SNOW/LIGHT MATERIAL BUCKET ALLOWS YOU TO MOVE LARGE AMOUNTS OF SNOW AND OTHER LIGHT MATERIAL WITH YOUR MINI SKID STEER.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- +1/4" grade 50 steel construction side plate wear bars
- +1/4" grade 50 steel construction skid bottom wear plates
- +Large 13.3 cu. feet heaped capacity
- +Plug & Play Ready: Includes universal CII mounting plate

- + Landscaping
- + Farming
- + Municipal jobs
- + Property management

- +Site preparation
- + Snow removal
- +Site clean-up
- + General construction



MODEL	48" MINI SNOW BUCKET
Part Number	91876089
Weight	245 lb.
Width	49.5"
Height	22.25"
Depth (bucket)	31.4"
Side Plate Wear Bars	.25" grade 50
Cutting Edge	.5" × 4" 1060 HR
Skid Bottom Wear Plates	.25" grade 50
Grade of Steel (bucket body)	A36
Steel Thickness (bucket body)	12 gauge
Struck Capacity	10.7 cu. feet
Heaped Capacity	13.3 cu. feet
Mounting Plate	Universal CII Mounting Plate





MINI SOIL CONDITIONER

HYDRAULIC

SEPARATE ROCKS, TEAR UP SOD, AND PULVERIZE DIRT CLODS.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Direct-drive design
- + Float mount design for a more efficient operation
- + Depth changes on the go
- +Tungsten carbide teeth
- +Solid rubber wheels; with one pin can be raised out of the way for serious digging
- + Side plates are adjustable and removable
- + Spiraled teeth for windrowing
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate



- + Landscaping
- + Municipal jobs
- + Property management
- +Site preparation
- +Soil preparation

- + Grade soil and gravel
- + Rakes stones and debris
- +Pulverizes dirt clods
- + Tears up sod
- +Seedbed preparation

MODEL	48" MINI SOIL CONDITIONER - HYDRAULIC
Part Number	91876070
Weight	385 lb.
Angling	Hydraulic
Angled Rotor Width	43.5"
Working Width	48"
Working Depth	0-2.5"
Max. Angle (both ways)	25°
Overall Width	56.75"
Overall Length	49"
Rated Flow	9-15 GPM
Mounting Plate	Universal CII Mounting Plate



MINI STUMP GRINDER

STANDARD

A UNIQUE BIDIRECTIONAL CUTTING DESIGN CREATES A MORE AGGRESSIVE CUTTING PATTERN THAT TAKES OUT EVEN THE LARGEST OF STUMPS IN NO TIME.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

+ Bidirectional cutting design allows for dual pass operation

+24 - durable carbide teeth - a real time saver, lessens labor

+1/2" × 14.5" diameter steel plate cutting wheel

+Up to 1,000 RPM cutting wheel speed

+ Maximum cutting depth 6" below ground

+Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate



+ Landscaping

+ Farming

+ Municipal jobs

+ Property management

+Site preparation

+ Forestry



MODEL	MINI STUMP GRINDER
Part Number	91876090
Weight	525 lb.
Hydraulic Requirements	7-16 GPM
Maximum Cutting Diameter	36"
Maximum Cutting Depth	6" below ground
Cutting Arc	66°
Cutting Wheel Diameter	18"
Cutting Wheel Speed	500-1,000 RPM
Replaceable Carbide Teeth	24
Mounting Plate	Universal CII Mounting Plate







MINI TILLER STANDARD

THE MINI ROTARY TILLER IS THE PERFECT TOOL FOR PREPARING GARDENS, FOOD PLOTS OR SEEDING BEDS.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- +Tills up to 4" deep
- + Bidirectional rotation increases efficiency by saving time and labor
- + Direct-drive motor gives higher production with lower maintenance
- + Replaceable, double edge, hardened tines for prolonged life
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate



APPLICATIONS:

- +Landscaping
- + Hobby farming
- + Property management
- + Leveling

- + Soil mixing/preparation
- + Seedbed preparation
- + Pulverizes dirt clots
- + Tears up sod

MODEL	50" MINI TILLER
Part Number	91876077
Weight	400 lb.
Overall Width	50.5"
Tilling Width	37"
Tilling Depth	0 - 4"
Overall Height	19.5"
Number of Tines	32
Tine Rotation	Bidirectional
Driveline	1 Motor
Hydro Flow Needed	7-16 GPM
Hydro Pressure Needed	2,500 psi
Drive	Direct
Mounting Plate	Universal CII Mounting Plate

CNH Industrial America LLC., are the property of those respective companies. www.casece.com



MINI TREE SPADE

STANDARD

THE MINI TREE SPADE IS AN EFFICIENT WAY TO TRANSPLANT SMALL TREES. SIMPLY SCOOP OUT YOUR DESTINATION SOIL, THEN SCOOP UP YOUR TREE AND PLACE IT IN ITS NEW LOCATION.

FOR USE ON: Mini Track Loader (MTL) and Small Articulated Loader (SAL)

FEATURES:

- +Sharp digging point
- +1/4" high alloy steel that hardens with use
- + Frame reinforcement
- +Clear operator view
- +Plug & Play Ready: Includes universal CII mounting plate

- + Construction
- + Hobby farming
- + Property management
- + Nursery Farms
- + Landscaping



MODEL	MINI SPADE
Part Number	92092821
Shipping Weight	110 lb.
Length	32"
Width	24"
Height	12"
Blade Angle	75°
Blade Thickness	1/4"
Tree Diameter (evergreen)	1.5"
Tree Diameter (hardwood)	1"
Root Ball Diameter	22"
Mounting Plate	Universal CII Mounting Plate









MINI TRENCHER

STANDARD

THE MINI TRENCHER IS THE PERFECT TRENCH DIGGING SOLUTION FOR YOUR MINI SKID STEER OR WALK BEHIND MACHINE.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Direct-drive design
- +3' boom with crumber shoe that is removable
- +12" spoil auger that is removable
- +Teeth Options: Bullet, Scorpion, and Double Cup
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate

CNH Industrial America LLC., are the property of those respective companies. www.casece.com



- +Landscaping
- + Hobby farming
- + Property management
- + Trenching

- + Municipal jobs
- +Water & utility jobs
- + Irrigation systems

MODEL	MINI TRENCHER: 3' BOOM, 6" CHAIN - BULLET TEETH	MINI TRENCHER: 3' BOOM, 6" CHAIN - SCORPION TEETH	MINI TRENCHER: 3' BOOM, 6" CHAIN - DOUBLE CUP TEETH
Part Number	91876071	91876072	91876073
Weight (3' × 6" Double Chain)	600 lb.	600 lb.	600 lb.
Overall Width	40.38"	40.38"	40.38"
Overall Height	24"	24"	24"
Overall Length	79.38"	79.38"	79.38"
Trenching Depth @ 60°	38"	38"	38"
Operating psi	2,000 - 3,000 psi	2,000 - 3,000 psi	2,000 - 3,000 psi
Rated Flow	7-16 GPM	7-16 GPM	7-16 GPM
Shaft Speed	85-185 RPM	85-185 RPM	85-185 RPM
Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate

MINI V-PLOW STANDARD

TURN YOUR MINI SKID STEER INTO A SNOW MOVING MACHINE.

FOR USE ON: Mini Track Loader (MTL) & Small Articulated Loader (SAL)

FEATURES:

- + Simple-to-use manual blade position selection
- + Float and oscillation allow blade to follow ground contour
- + Trip edges protect the attachment, loader, and surface
- + Adjustable trip springs
- + Greasable pins at all joints
- + Adjustable skid shoes
- + Plug & Play Ready: Includes proper hose lengths, quick disconnects, wire harness, and universal CII mounting plate
- + Flexible wings to match a variety of snow applications

- + Breaking snow banks, moving through tight spaces, and stacking snow piles
- + Gathering snow over large areas



MODEL	48" MINI V-PLOW	60" MINI V-PLOW
Part Number	91876091	91876092
Weight	360 lb.	390 lb.
Straight Blade Width	53.5"	68.1"
Angled Blade Width	43.8"	55.8"
V Position Width	48"	60"
Scoop Position Width	39.7"	51.7"
Blade Height	21.3"	21.3"
Length	33"/35.4"/50"	33"/35.4"/50"
Blade Angle	+/- 30°	+/- 30°
Amount of Float	+/- 5°	+/- 5°
Moldboard Thickness	12 ga	12 ga
Bolt-on Cutting Edge	1/2" × 4" AR400	1/2" × 4" AR400
Mounting Plate	Universal CII Mounting Plate	Universal CII Mounting Plate

















BUILDING A STRONG CASE.

Since 1842, we at CASE Construction Equipment have lived by an unwavering commitment to build practical, intuitive solutions that deliver both efficiency and productivity.

We strive to make it easier for you to implement emerging technologies and new compliance mandates.

Today, our global scale combined with our local expertise enables us to keep customers' real-world challenges at the center of our product development. This focus has led to numerous innovations like the CASE Minotaur[™] DL550 compact dozer loader, Ride Control[™], adjustable electro-hydraulic controls, Blade Shake, PowerLift™, over-center boom design and the peace of mind that only CASE ProCare provides.

Every CASE machine is backed by more than 315 North American dealer locations, thousands of OEM, remanufactured and all-makes parts, and flexible financing and insurance options that provide the kind of reliable, steadfast support you expect from a professional partner.

We are passionate about improving the lives of others, whether investing in our veterans or raising awareness about local infrastructure initiatives through Dire States. Our goal is to build both stronger machines — and stronger communities.

At the end of the day, we do what's right by you and your communities so that you can always count on CASE.

CaseCE.com

PM-23334 Issued 09/2023 Replaces: None

©2023 CNH Industrial America LLC. All rights reserved. CASE is a trademark registered in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. CNH Industrial Genuine Parts is a trademark in the United States and many other countries, owned by or licensed to CNH Industrial N.V., its subsidiaries or affiliates. Any trademarks referred to herein, in association with goods and/ or services of companies other than CNH Industrial America LLC... are the property of those respective companies.

IMPORTANT: CASE Construction Equipment Inc. reserves the right to change these specifications without notice and without incurring any obligation relating to such change. Availability of some models and equipment builds vary according to the country in which the equipment is used. The illustrations and text may include optional equipment and accessories and may not include all standard equipment. Your CASE dealer/distributor will be able to give you details of the products and their specifications available in your area



CASE Construction Equipment is biodiesel-friendly.

NOTE: All engines meet current EPA emissions regulations. All specifications are stated in accordance with SAE Standards or Recommended Practices, where applicable.



SAFETY** Always read the Operator's Manual before operating equipment. Inspect equipment before using it, and be sure it is operating properly. Follow the product safety signs and use any safety features provided.