

SPECIFICATIONS

Austoft 4000

ENGINE	
Make	Cummins
Series	6BTA
Power	174hp
Cylinder Volume	5.9L
Number of Cylinders	6
Aspiration	Turbo/Aftercooler
TRANSMISSION	
Type	Hydrostatic
Travel speed	16km/h
CAPACITY	
Fuel Tank	210 L
Hydraulic Oil Tank	130 L
TYRES	
Front	10.5X16, 8-ply
Rear	16.9X 28 R-1, 10-ply
TOPPER	
Gathering Discs	2 (Optional)
Height Variation	1050 to 3000 mm
Height Adjustment	Hydraulic
Severing Drum	Bi-Directional
LIFT-O-MATIC CROP DIVIDERS	
Twin Crop Dividers	Yes
Distance Between the Tips	1100mm
Spiral Angle	30°
Height Adjustment	Hydraulic
Lower Section	Hardened
BASE CUTTER	
Drive	Hydraulic and reversible
Number of Discs	2, identical and reversible
Number of Knives	8, removable, 4 edged
Distance Between Center of Discs	495 mm

L = Litre

FEED ROLLERS	
Number of Rollers	11
Number of Rollers on the roller train	8
Drive	Hydraulic and reversible
Upper Rollers	Floating
EXTREME CHOPPER	
Number of Drums/Knives Per Drum	2 / 3
Deflector Plate	Adjustable
KNOCKDOWN ROLLER	
Height	Adjustable
Angle	51°
EXTRACTOR	
Extractor Fan Type	Anti Vortex™ (Optional)
Hood	Directional
ELEVATOR	
Drive	Hydraulic and reversible
Turning Angle	170°
AC CABIN	
No of Doors	2
No. of Lights	7
Windshield Wiper	1
Sky Watch	Yes


FACTORY-FITTED ITEMS

- Air-conditioned cab with 2 doors
- Sky Watch™
- Windshield wipers
- 2 rear view mirrors
- Dash board lighting
- Tachometer and hour meter of the engine
- Fuel level gauge
- Engine oil pressure indicator
- Temperature indicators of the hydraulic oil and engine water
- Battery voltage indicator
- Indicator of hydraulic pressure at base cutter and chopper
- Safety relays
- Safety brake
- Gyroflex
- Quartz halogen headlights mounted on the cab

Optional Items#

- Smart Reversible Fan
- Smart Eye Camera
- Disc-O-Gather Topper
- Antivortex Fan™

Optional items are available as standard features in special edition variant

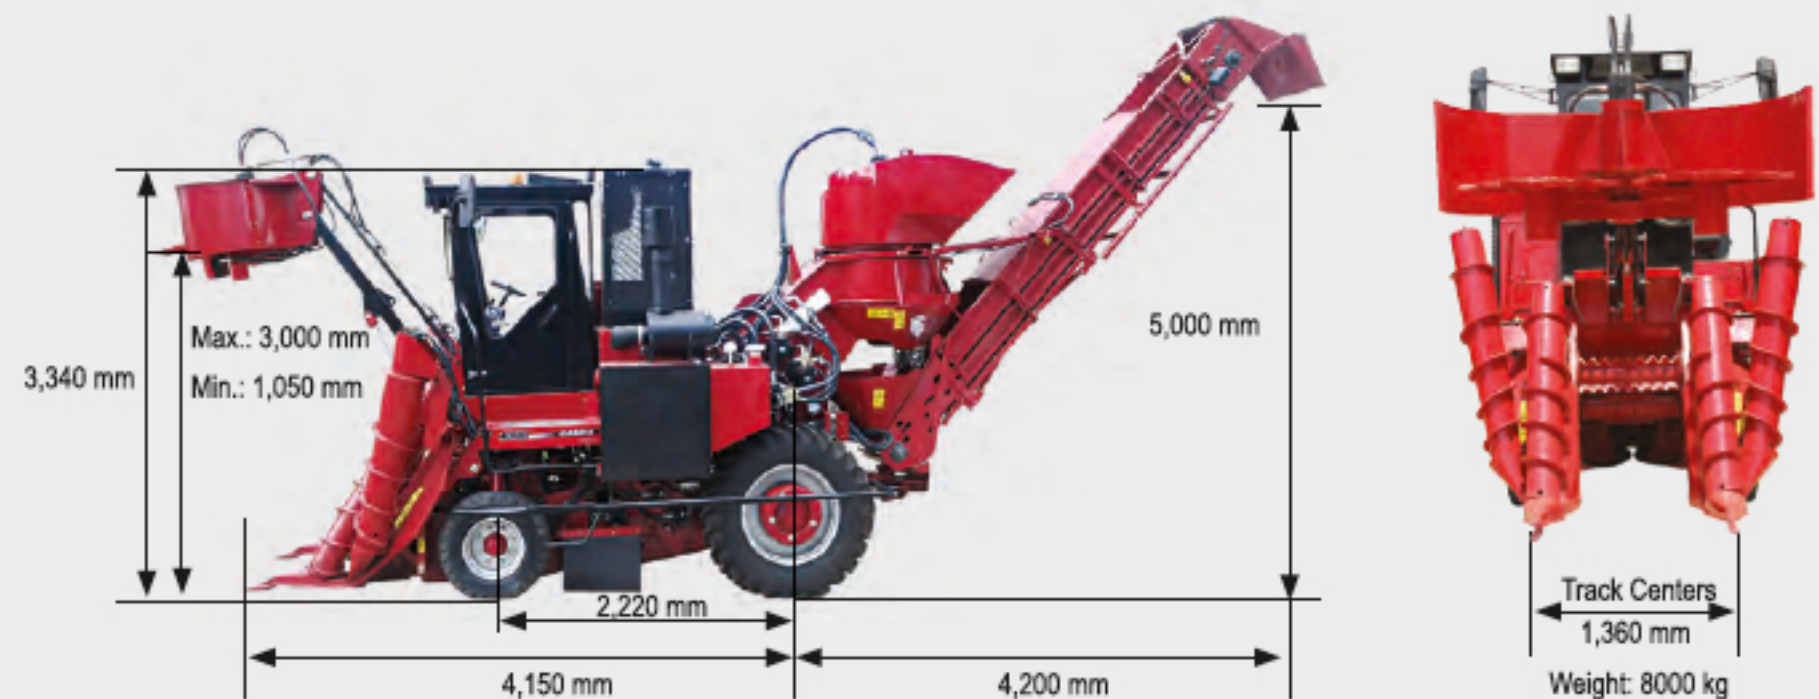

AUSTOFT
4000